

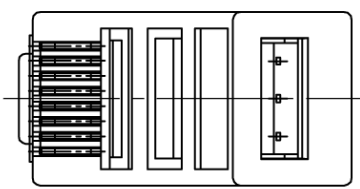
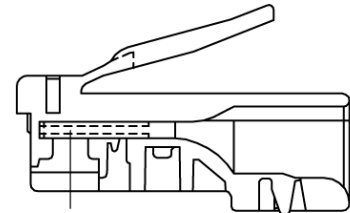
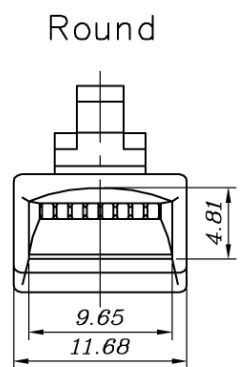


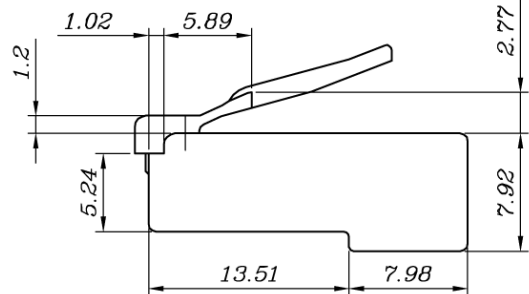

更改 REV	出图日期 DATE	设变内容 MODIFICATION	修 改 DRAWN
	11/05/05		

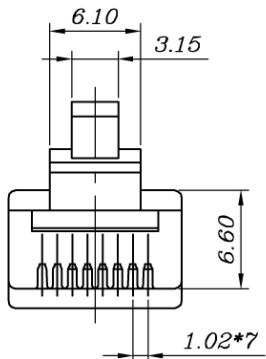

SPECIFICATIONS

1.ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 INSULATION RESISTANCE: 100 MΩ.
 TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH : 19.6N/PCS MIN.
 DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: PHOSPHOR BRONZE.
 CONDUCTOR : SOLID WIRE , 24AWG, 26 AWG.
 GOLD PLATING : 50u"

Round

BLADE:

Type	B
Drawing	
Mark	

		Quest Technology International, Inc. 11200 NW 138th St. Medley, FL 33178	
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		材 质 MATERIAL PC	图 号 DWG NO. NMP-8225
.X±0.20	.X°±5°	名 称 DESCRIPTION Cat5E RJ-45 Modular Plug, 8p8c, Solid Conductor, Round Jacket	
.XX±0.10	.XX°±2°	审 核 APPROVAL Lucia	核 对 CHECKED
		制 图 DRAWN Lucia	比 例 SCALE 2/1
		张 数 SHEET 1/1	更 改 REV A