

IP20    

### Driver LCI 35W 150mA-400mA TOP Ip

TOP series

#### Product description



- Fixed output built-in LED Driver
- Constant current LED Driver
- Output current settable 150 – 400 mA
- Max. output power 35 W
- Nominal life-time up to 100,000 h
- For luminaires of protection class I and protection class II
- Temperature protection as per EN 61347-2-13 C5e
- 5-year guarantee

#### Properties

- Low-profile metal casing with white cover
- Type of protection IP20

#### Functions

- Intelligent Temperature Guard (overtemperature protection)
- Short-circuit proof
- Overload protection
- Suitable for emergency escape lighting systems acc. to EN 50172

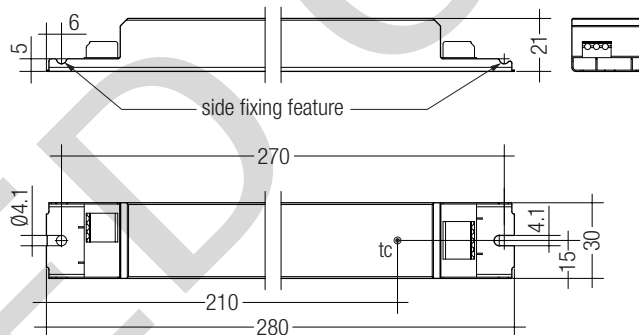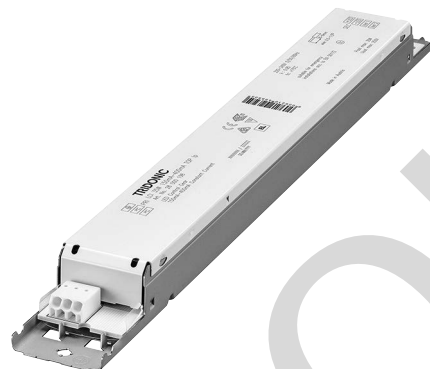

#### Ordering data

Type	Article number	Packaging carton	Packaging pallet	Weight per pc.
LCI 35W 150mA-400mA TOP Ip	28000198	10 pc(s).	960 pc(s).	0.199 kg



Standards, page 4

**Technical data**

Rated supply voltage	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V (start ≥ 198 V DC)
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 48 h
Leakage current (PE)	< 0.5 mA
Max. input power	39.7 W
Efficiency (at 230 V, 50 Hz, full load)	88 – 93 %
THD (at 230 V, 50 Hz, full load)	< 11 %
Output current tolerance	± 5 %
Output LF current ripple (< 120 Hz)	< 3 %
Max. peak output current <sup>①</sup>	Output current + 20 %
Max. output voltage (no-load voltage)	250 V
Time to light	< 0.5 s
Hold on time at power failure or switch-off	< 0.5 s
Switchover time (AC/DC)	< 0.5 s
Burst / surge peaks output side against PE	2 kV
Dimensions L x W x H	280 x 30 x 21 mm


**Specific technical data**

Type	Output current <sup>①</sup>	Min. forward voltage	Max. forward voltage	Max. output power	Input power (at 230 V, 50 Hz, full load)	Input current (at 230 V, 50 Hz, full load)	$\lambda$ (at 230 V, 50 Hz, full load)	tc point	Ambient temperature ta	tc/ta for ≥ 50.000 h	I sel resistor value
<b>LCI 35W 150mA-400mA TOP Ip</b>	150 mA	105.0 V	233.3 V	35 W	37.8 W	173 mA	0.95	75 °C	-25 ... +65 °C	75 / 65 °C	open
	175 mA	90.0 V	200.0 V	35 W	37.9 W	173 mA	0.95	75 °C	-25 ... +60 °C	75 / 60 °C	63.40 kΩ
	200 mA	78.8 V	175.0 V	35 W	38.0 W	174 mA	0.95	75 °C	-25 ... +60 °C	75 / 60 °C	54.90 kΩ
	225 mA	70.0 V	155.6 V	35 W	38.2 W	175 mA	0.95	75 °C	-25 ... +60 °C	75 / 60 °C	47.50 kΩ
	250 mA	63.0 V	140.0 V	35 W	38.3 W	175 mA	0.95	75 °C	-25 ... +60 °C	75 / 60 °C	40.20 kΩ
	275 mA	57.3 V	127.3 V	35 W	38.5 W	176 mA	0.95	75 °C	-25 ... +55 °C	75 / 55 °C	34.00 kΩ
	300 mA	52.5 V	116.7 V	35 W	38.8 W	178 mA	0.95	75 °C	-25 ... +55 °C	75 / 55 °C	27.40 kΩ
	325 mA	48.5 V	107.7 V	35 W	38.9 W	178 mA	0.95	75 °C	-25 ... +55 °C	75 / 55 °C	22.00 kΩ
	350 mA	45.0 V	100.0 V	35 W	39.2 W	179 mA	0.95	75 °C	-25 ... +55 °C	75 / 55 °C	12.00 kΩ
	375 mA	42.0 V	93.3 V	35 W	39.3 W	180 mA	0.95	75 °C	-25 ... +55 °C	70 / 50 °C	6.19 kΩ
	400 mA	39.4 V	87.5 V	35 W	39.7 W	182 mA	0.95	75 °C	-25 ... +55 °C	70 / 50 °C	short circuit (0 Ω)

<sup>①</sup> Output current is mean value.

**Product description**

- Ready-for-use resistor to set output current value
- Compatible with LED Driver series TOP and ECO
- Resistor is base isolated
- Resistor power 0.25 W
- Resistor value tolerance  $\pm 1\%$

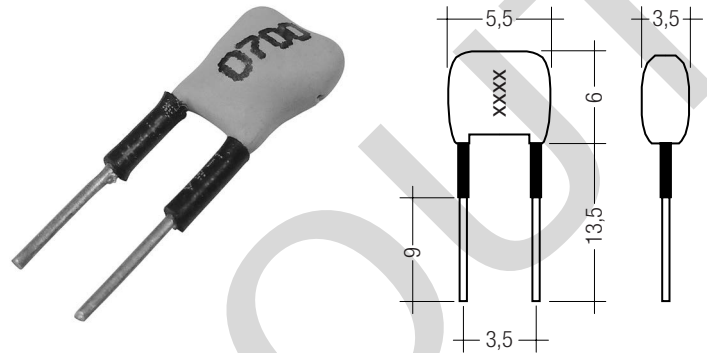**Ordering data**

Type	Article number	Colour	Marking	Resistor value	Packaging bag	Weight per pc.
I-SELECT PLUG 175mA BL	28000446	Blue	0175	63.40 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG 200mA BL	28000447	Blue	0200	54.90 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG 225mA BL	28000448	Blue	0225	47.50 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG 250mA BL	28000368	Blue	0250	40.20 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG 275mA BL	28000369	Blue	0275	34.00 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG 300mA BL	28000275	Blue	0300	27.40 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG 325mA BL	28000449	Blue	0325	22.00 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG 350mA BL	28000276	Blue	0350	12.00 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG 375mA BL	28000450	Blue	0375	6.19 k $\Omega$	10 pc(s).	0.001 kg
I-SELECT PLUG MAX GR	28000274	Grey	MAX	0 $\Omega$	10 pc(s).	0.001 kg

**Standards**

EN 55015  
 EN 61000-3-2  
 EN 61000-3-3  
 EN 61347-2-13  
 EN 62384  
 EN 61547

According to EN 50172 for use in central battery systems

According to EN 60598-2-22 suitable for emergency lighting installations

**Output current setting**

Output current can be set by connecting a resistor between the 2 "I sel" terminals. Relationship between output current and resistor value can be found at the table "Specific technical data". Resistor values specified from standardised resistor value ranges.

Resistor value tolerance has to be  $\leq 1\%$ .

Resistor power has to be  $\geq 0.1$  W.

If the resistor is connected with wires a max. wire length of 2 m may not be exceeded and possible interferences have to be avoided.

Resistor detection at each start.

Change of the resistor value during the operation will be not considered.

Resistors for the main output current values can be ordered from Tridonic (see accessories).

**DC emergency operation**

The LED Driver is designed for operation on DC voltage and pulsed DC voltage.

Light output level in DC operation: 100 %

The voltage-dependent input current of Driver incl. LED module is depending on the used load.

The voltage-dependent no-load current of Driver (without or defect LED module) is for:

AC: < 43.5 mA

DC: < 6.0 mA

**Overload protection**

LED Driver will switch off at overload operation. Mains reset is required to restart the LED Driver.

**Underload operation**

LED Driver will switch off at underload operation. Mains reset is required to restart the LED Driver.

**Overtemperature protection**

The LED Driver will reduce output current at temporary thermal over-heating (exceeding max.  $t_c$  point). On DC operation this function is deactivated to fulfill emergency requirements.

**Short-circuit behaviour**

LED Driver will switch off in case of short-circuit of LED output. Mains reset is required to restart the LED Driver.

**No-load operation or load loss during operation**

LED Driver will detect a load loss during operation. In this case and no-load operation the max. output voltage can apply at the LED output for max. 5 s before LED Driver shuts down. Mains reset is required to restart the LED Driver.

**Hot plug-in**

Hot plug-in is not recommend within 5 s after shutdown due to output voltage of > 0 V. Mains reset is required to restart the LED Driver if LED module is connected to the LED Driver after these 5 s.

**Conditions of use and storage**

Humidity: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range ( $t_a$ ) before they can be operated.

**Temperature range**

The LED Driver life duration is related to the ambient temperature  $t_a$ . The relation of  $t_c$  to  $t_a$  temperature depends also on the luminaire design. If the measured  $t_c$  temperature is approx. 5 K below  $t_c$  max. or higher,  $t_a$  temperature should be checked and eventually critical components (e.g. ELCAP) measured. Detailed information on request.

**Expected life-time**

Type	Output current	$t_a$	40 °C	50 °C	55 °C	60 °C	65 °C
<b>LCI 35W 150mA-400mA TOP Ip</b>	150 mA	$t_c$	50 °C	60 °C	65 °C	70 °C	75 °C
		life-time	> 100,000 h	> 100,000 h	> 100,000 h	75,000 h	50,000 h
	175 – 250 mA	$t_c$	55 °C	65 °C	70 °C	75 °C	x
		life-time	> 100,000 h	> 100,000 h	75,000 h	50,000 h	x
	275 – 350 mA	$t_c$	60 °C	70 °C	75 °C	x	x
		life-time	> 100,000 h	75,000 h	50,000 h	x	x
	375 – 400 mA	$t_c$	60 °C	70 °C	75 °C	x	x
		life-time	> 100,000 h	50,000 h	40,000 h	x	x

x = not permitted

The LED Driver is designed for a life-time stated above under reference conditions and with a failure probability of less than 10 %.

**Maximum loading of automatic circuit breakers**


Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current
Installation Ø	1,5 mm <sup>2</sup>	1,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	1,5 mm <sup>2</sup>	1,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	$I_{max}$ time
<b>LCI 35W 150mA-400mA TOP Ip</b>	24	42	46	54	12	21	23	27	20,8 A 165 µs

**Harmonic distortion in the mains supply (at 230 V / 50 Hz and full load) in %**


	THD	3.	5.	7.	9.	11.
<b>LCI 35W 150mA-400mA TOP Ip</b>	< 11	< 8	< 1,5	< 5	< 4	< 2

**Installation instructions****Wiring type and cross section**

Solid wire with a cross section of 0,5 – 1,5 mm<sup>2</sup>. Strip 8 – 9 mm of insulation from the cables to ensure perfect operation of terminals.

**Release of the wiring**

Loosen wire through twisting and pulling or using a Ø 1 mm release tool.

**Wiring guidelines**

- All connections must be kept as short as possible to ensure good EMI behaviour.
- Earthing is not required for the device to operate but will improve the EMI behaviour for protection class I luminaires.
- If LCI TOP Ip will be earthed protection earth (PE) has to be used.
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Max. length of output and I sel wires is 2 m.
- Secondary switching is not permitted.
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.).


**Earth connection**

The earth connection is conducted as protection earth (PE). The LED Driver can be earthed via earth terminal or metal housing. If the LED Driver will be earthed, protection earth (PE) has to be used. There is no earth connection required for the functionality of the LED Driver.


Earth connection is recommended to improve following behaviour.

- Electromagnetic interferences (EMI)
- Transmission of mains transients to the LED output

In general it is recommended to earth the LED Driver if the LED module is mounted on earthed luminaire parts respectively heat sinks and thereby representing a high capacity against earth.

**Side fixing feature**

Screw M4, screw head diameter 8–10 mm

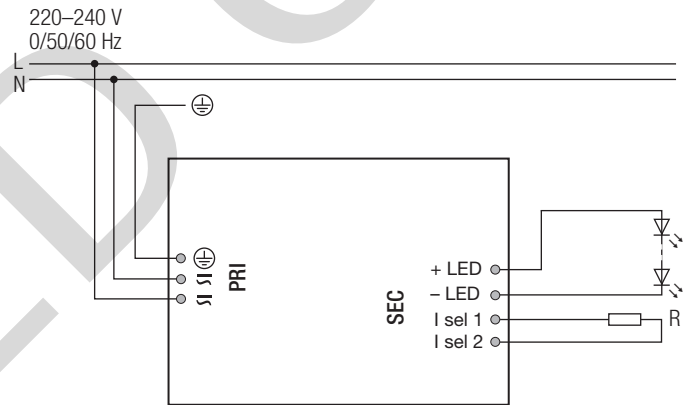**Circuit diagram****Isolation and electric strength testing of luminaires**

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V<sub>DC</sub> for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V<sub>AC</sub> (or 1,414 x 1500 V<sub>DC</sub>). To avoid damage to the electronic devices this test must not be conducted.

**Additional information**


Additional technical information at [www.tridonic.com](http://www.tridonic.com) → Technical Data

Guarantee conditions at [www.tridonic.com](http://www.tridonic.com) → Services


Life-time declarations are informative and represent no warranty claim. No warranty if device was opened.

Diagrams LCI 35W 150mA-400mA TOP Ip


Efficiency vs load

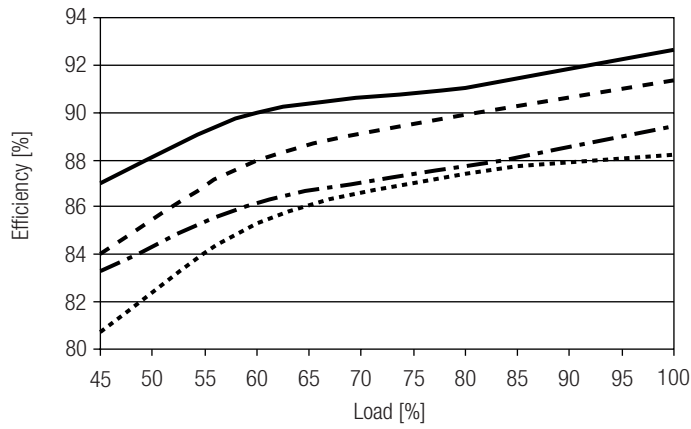


Power factor vs load

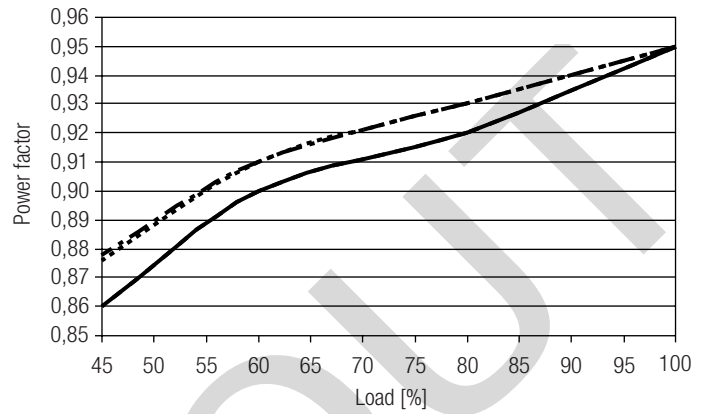

Input power vs load

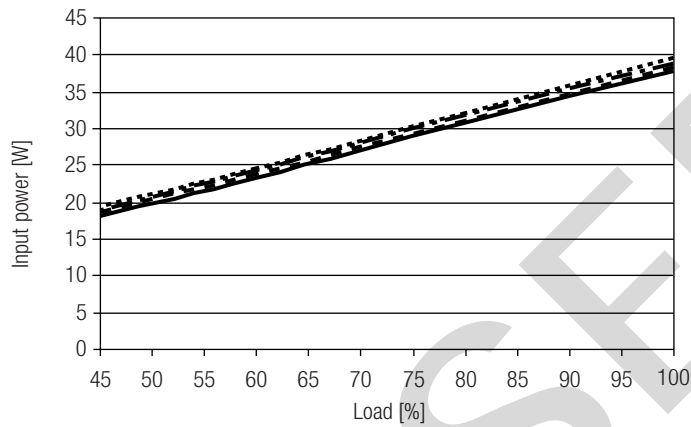

Input current vs load

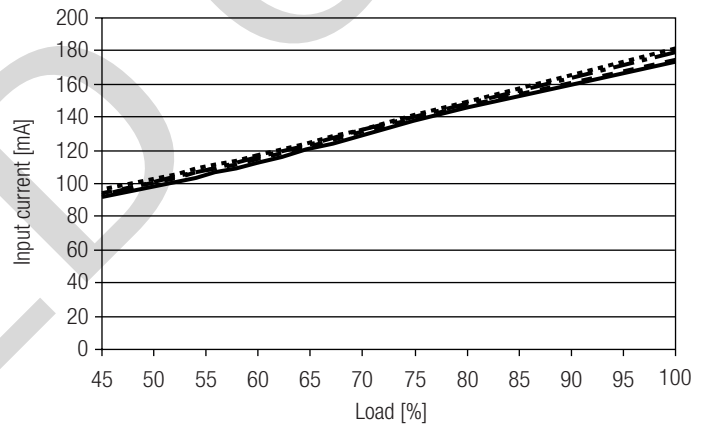

THD vs load

