

N55PA01

Data Sheet

1W PWM Power Amplifier

The information described in this document is the exclusive intellectual property of Nuvoton Technology Corporation and shall not be reproduced without permission from Nuvoton.

Nuvoton is providing this document only for reference purposes of *Peripheral* based system design. Nuvoton assumes no responsibility for errors or omissions.

All data and specifications are subject to change without notice.

For additional information or questions, please contact: Nuvoton Technology Corporation.

www.nuvoton.com

Table of Contents

1.	General Description	3
2.	Features	3
3.	Block Diagram	4
4.	PAD Description	5
5.	Electrical Characteristics	6
	5.1 Absolute Maximum Ratings	6
	5.2 D.C. Characteristics	6
	5.3 A.C. Characteristics	6
6.	Output Power vs. Supply Voltage	7
7.	Typical Application Circuit	8
8.	Package Information	9
	8.1 PIN Assignment	9
	8.2 Package Dimension	10
9.	Ordering Information	11
10.	Revision History	11


1. General Description

The N55PA01 is an amplifier to amplify output signal (max. 1W @5.5V) from PWM and/or MIC Line-in. It supports Nuvoton Speech/MIDI/NuVoice IC PWM output without extra components. The gain is adjustable by external resistor.

2. Features

- Operation Voltage:
 - 2.2V ~ 5.5 V
- Accept both PWM signal without external components
- Mute Function
- Standby current: typical 1.8uA
- Adjustable gain by external R
- Auto power on/off
- Support MIC Line In
- Max. output power: 1W @5.5V (THD+N: 1%), 8Ω.
- Package form:
 - SOP8

3. Block Diagram

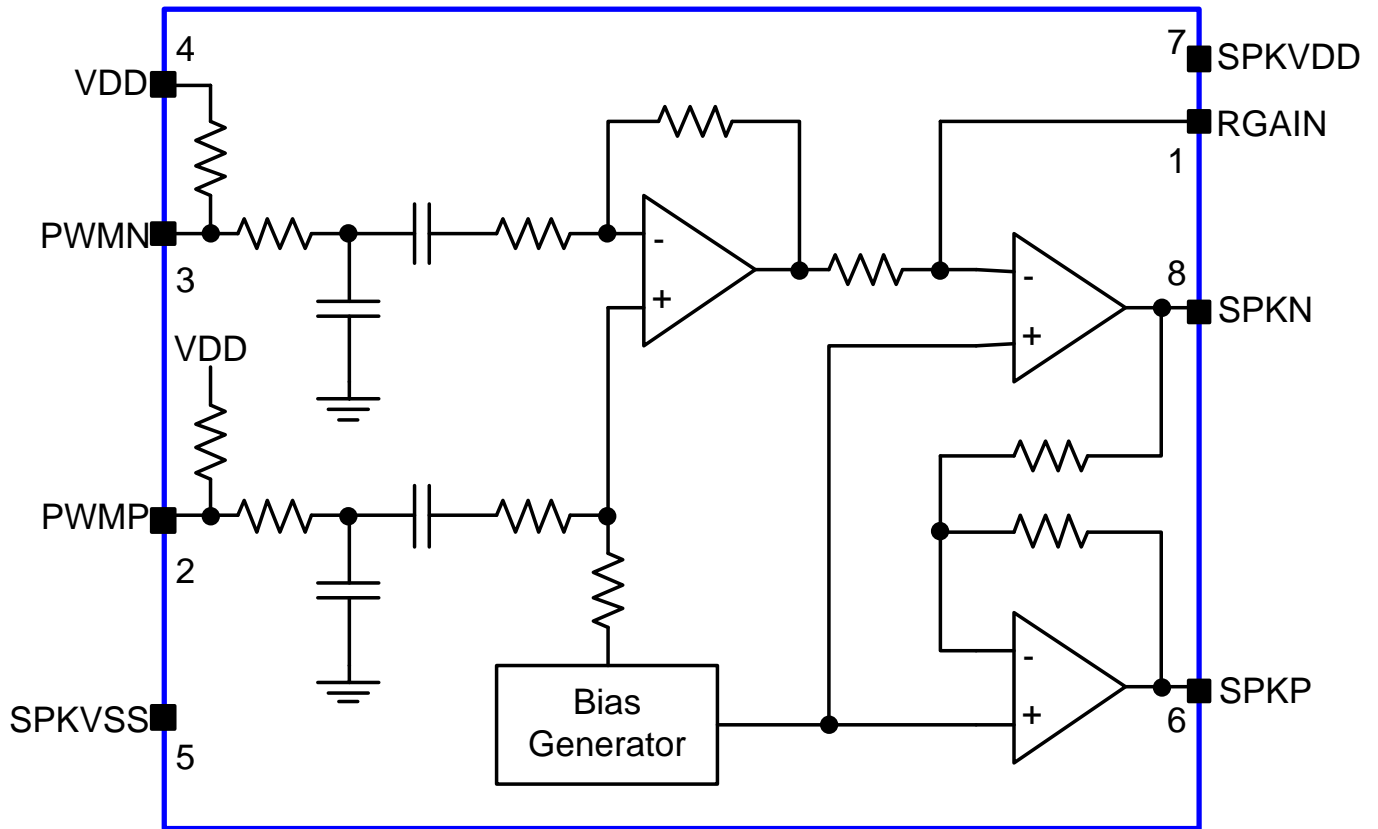

4. Pin Description

Name	I/O	Power Supply	Description
VDD	P	-	Positive power for IC internally
PWMP	I	VDD	PWM driver positive signal input
PWMN	I	VDD	PWM driver negative signal input
RGAIN	I	-	Gain control pin
SPKVDD	P	-	Positive power supply for speaker driving
SPKP	O	SPKVDD	Positive speaker signal amplified output
SPKN	O	SPKVDD	Negative speaker signal amplified output
SPKVSS	P	-	Negative power supply for speaker driving

Note: VDD, SPKVDD must have same voltage power input.

5. Electrical Characteristics

5.1 Absolute Maximum Ratings

Parameter	Symbol	Conditions	Rated Value	Unit
Input Voltage	VIN	All Inputs	VSS -0.3 to VDD +0.3	V
Storage Temp.	TSTG	-	-55 to +150	°C
Operating Temp.	TOPR	-	-20 to +85	°C

Note: Exposure to conditions beyond those listed under the Absolute Maximum Ratings table may adversely affect the life and reliability of the device.

5.2 D.C. Characteristics

(VDD – VSS = 4.5V, TA = 25° C, No Load unless otherwise specified)


Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	UNIT
Operating Voltage	VDD		2.2	-	5.5	V
Operating Current	IOP	No load, VDD=5.5V	-	1.5	2	mA
Standby Current	ISTB	No load, VDD=5.5V (PWMP=floating PWMN=floating)	-	1.8	3	µA
Pull high Resistor (PWMP/PWMN)	RPH	VDD=3.3V	1.4	2	2.6	MΩ

5.3 A.C. Characteristics

(VDD = 4.5V, TA = 25°C, No Load unless otherwise specified)


Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	UNIT
Standby time	St	Ton			25	mS
		Toff			200	
Output power	Pout	VDD=5.5V, THD+N=1%, RL=8Ω		1		W
THD+Noise	THD+N	VDD=5.5V, Pout=1W, RL=8Ω		1%		

6. Output Power vs. Supply Voltage

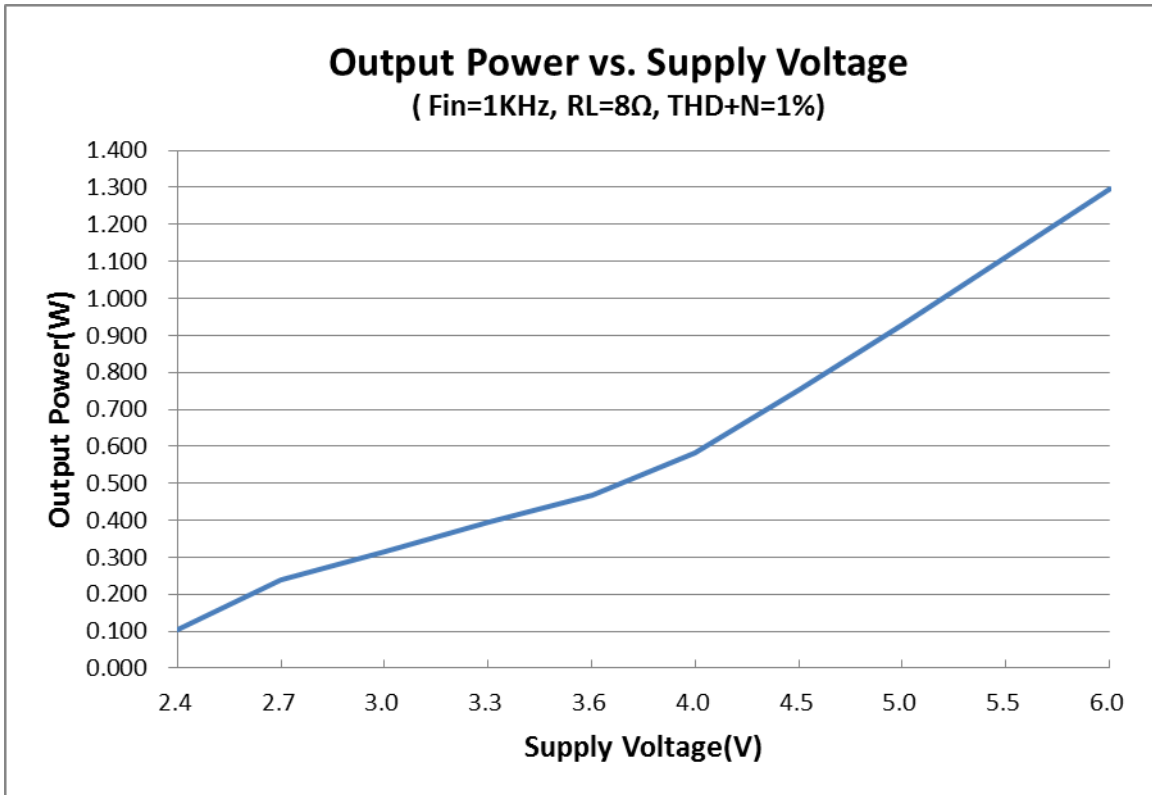


7. Typical Application Circuit

N58x, N56x with N55PA01 Application Circuit

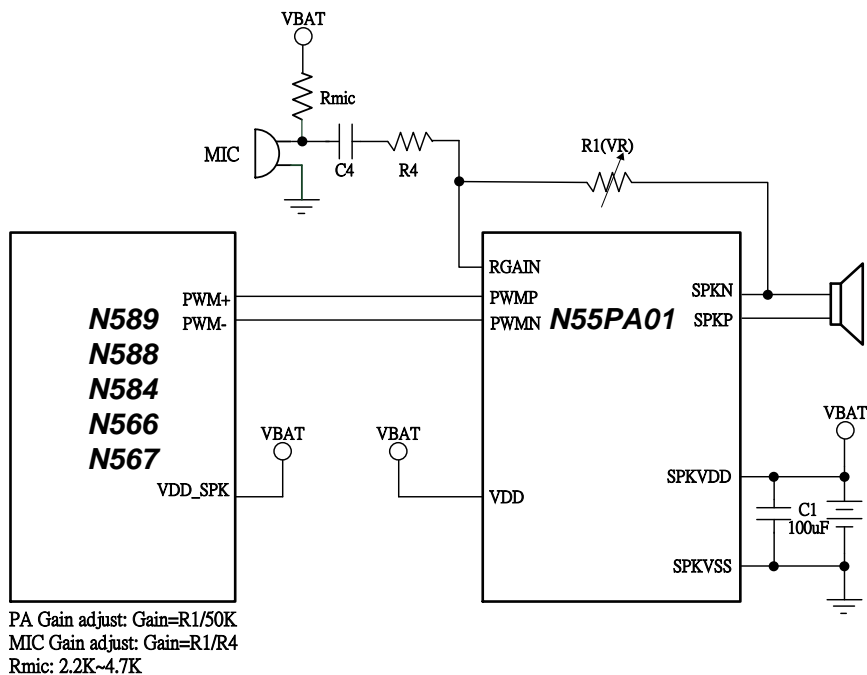


N569, N57x with N55PA01 Application Circuit

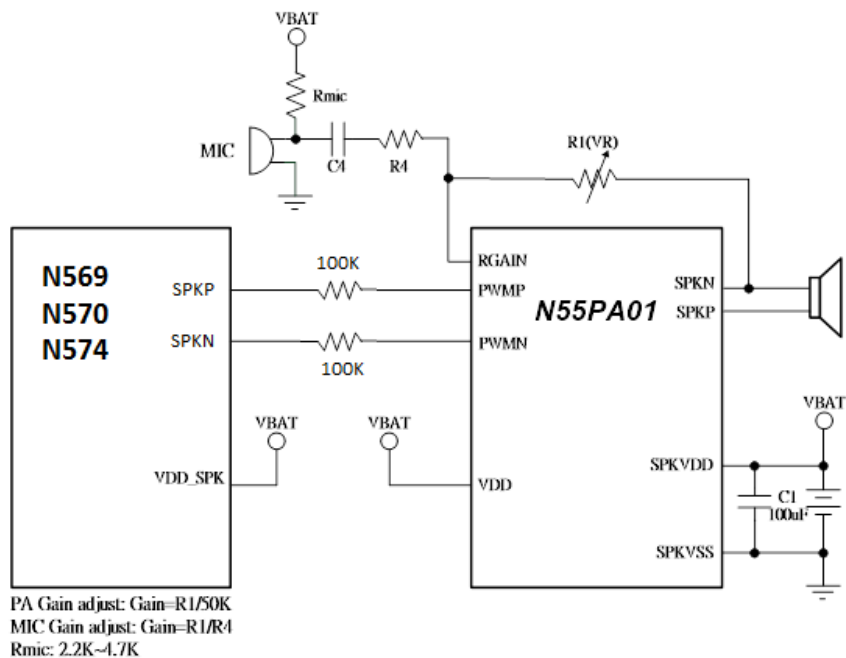

Note: the 100KΩ between NuVoice SPKP/N and N55PA01 PWMP/N are necessary to reduce DPWM power noise


8. Package Information

8.1 PIN Assignment

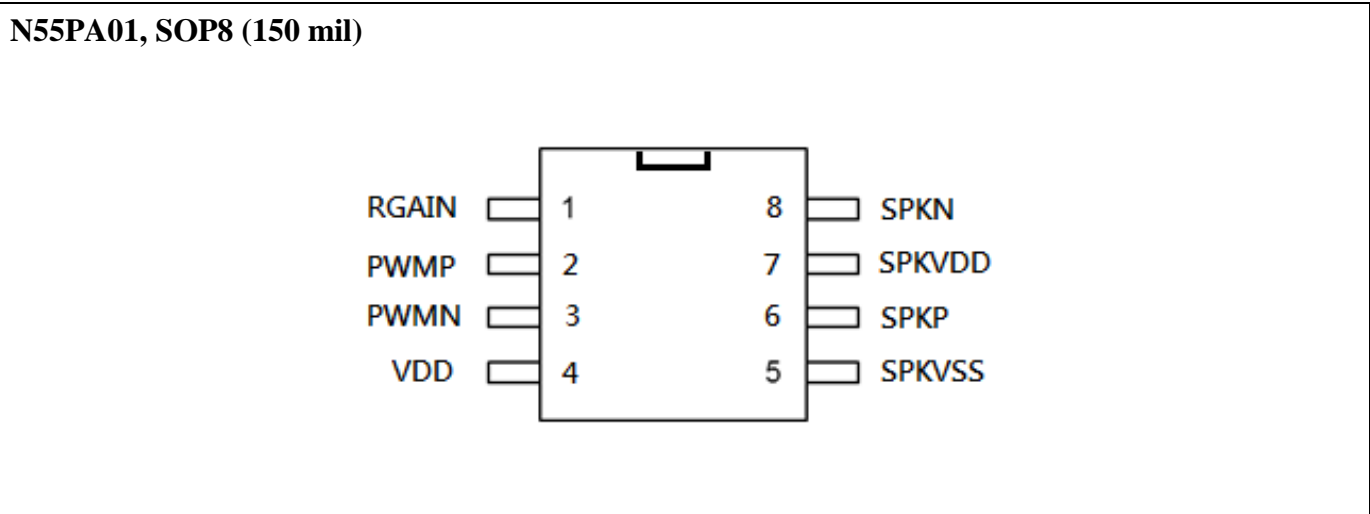

8.2 Package Dimension

SOP8, 150 mil

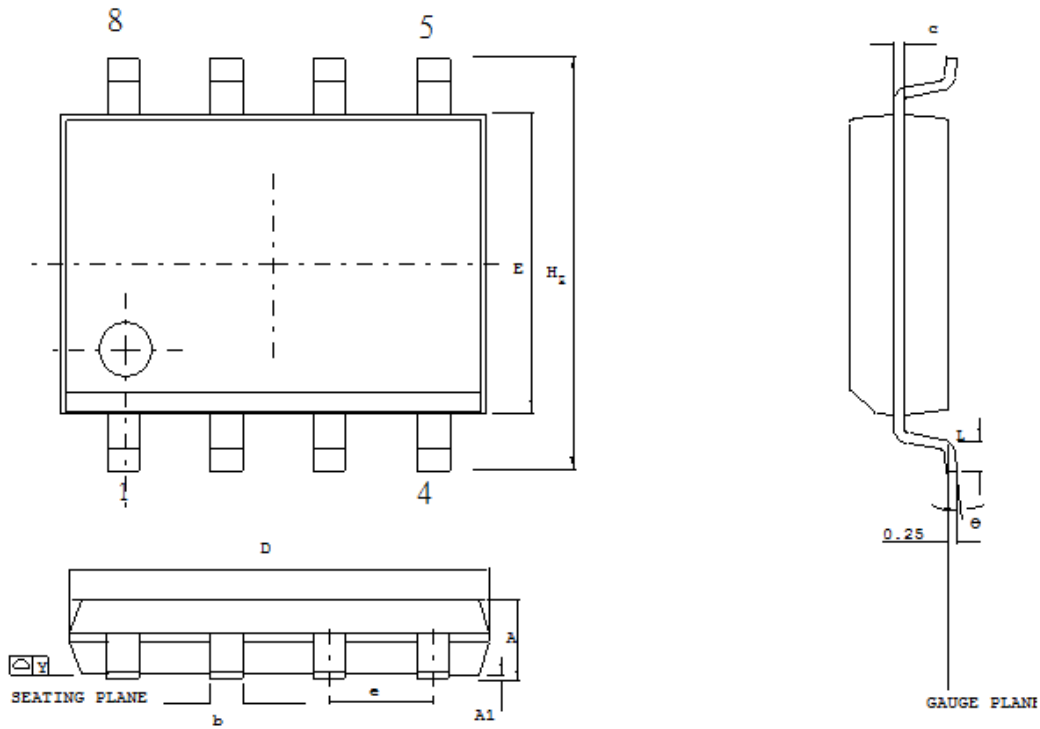

Control dimensions are in millimeters.

SYMBOL	DIMENSION IN MM		DIMENSION IN INCH	
	MIN.	MAX.	MIN.	MAX.
A	1.35	1.75	0.053	0.069
A1	0.1	0.25	0.004	0.01
B	0.33	0.51	0.013	0.02
C	0.19	0.25	0.008	0.01
E	3.8	4	0.15	0.157
D	4.8	5	0.188	0.196
e	1.27 BSC		0.050 BSC	
H _F	5.8	6.2	0.228	0.244
Y	-	0.1	-	0.004
L	0.4	1.27	0.016	0.05
θ	0	10	0	10

9. Ordering Information

Part No.	Shape	Type
N55PA01A	E	Package: SOP8 (150mil)

10. Revision History

Revision	Date	Substantial Changes	Page
Rev 1.0	Dec. 2020	Initial Release	All
Rev 2.0	Jan. 2021	Update Application Circuit	8
Rev 2.1	Mar. 2021	Update VDD spec. Add NuVoice Application Circuit	3, 6, 8

Important Notice

Nuvoton Products are neither intended nor warranted for usage in systems or equipment, any malfunction or failure of which may cause loss of human life, bodily injury or severe property damage. Such applications are deemed, “Insecure Usage”.

Insecure usage includes, but is not limited to: equipment for surgical implementation, atomic energy control instruments, airplane or spaceship instruments, the control or operation of dynamic, brake or safety systems designed for vehicular use, traffic signal instruments, all types of safety devices, and other applications intended to support or sustain life.

All Insecure Usage shall be made at customer’s risk, and in the event that third parties lay claims to Nuvoton as a result of customer’s Insecure Usage, customer shall indemnify the damages and liabilities thus incurred by Nuvoton.

*Please note that all data and specifications are subject to change without notice.
All the trademarks of products and companies mentioned in this datasheet belong to their respective owners.*