

PCJ-105D3MH,303

! PENDING OBSOLESCENCE

OEG | OEG Slimline PCB Relay PCN

TE Internal #: 1721531-4

TE Internal Description: PCJ-105D3MH,303

Slim PCB Relay, PCN 3A/5A 3VDC

[View on TE.com >](#)



Relays, Contactors & Switches > Relays > Power Relays > Slim PCB Relay, PCN 3A/5A 3VDC



- Power Relay Type: **Standard**
- Coil Magnetic System: **Monostable, DC**
- Coil Power Rating DC: **200 mW**
- Coil Resistance: **125 Ω**
- Coil Special Features: **UL Coil Insulation Class A**

[All Slim PCB Relay, PCN 3A/5A 3VDC \(0\)](#)

Features

Product Type Features

Power Relay Type	Standard
------------------	----------

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class	3500 – 4000 V
Insulation Initial Dielectric Between Open Contacts	750 Vrms
Contact Limiting Making Current	5 A
Contact Limiting Short-Time Current	5 A
Contact Limiting Continuous Current	5 A
Insulation Creepage Class	5.5 – 8 mm
Coil Power Rating Class	150 – 200 mW
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms
Insulation Initial Resistance	1000 M Ω
Insulation Creepage Between Contact & Coil	8 mm[.315 in]
Contact Limiting Breaking Current	5 A



Coil Magnetic System	Monostable, DC
Coil Power Rating DC	200 mW
Coil Resistance	125 Ω
Coil Special Features	UL Coil Insulation Class A
Coil Voltage Rating	5 VDC
Contact Switching Load (Min)	100mA @ 5V
Contact Switching Voltage (Max)	30 VDC
Contact Voltage Rating	250 VAC

Body Features

Insulation Special Features	7000V Initial Surge Withstand Voltage between Contacts & Coil
Product Weight	4 g[.141 oz]

Contact Features

Contact Arrangement	1 Form A (NO)
Contact Current Class	2 – 5 A, 16 A
Contact Current Rating (Max)	5 A
Contact Material	AgNi
Contact Number of Poles	1
Relay Terminal Type	PCB-THT

Mechanical Attachment

Relay Mounting Type	Printed Circuit Board
---------------------	-----------------------

Dimensions

Length Class (Mechanical)	20 – 25 mm
Insulation Clearance Class	5 – 8 mm
Height Class (Mechanical)	14 – 15 mm
Insulation Clearance Between Contact & Coil	7.5 mm[.295 in]
Width Class (Mechanical)	6 – 8 mm
Product Width	7 mm[.276 in]
Product Length	20.39 mm[.803 in]
Product Height	15.01 mm[.591 in]

Usage Conditions

Environmental Ambient Temperature Class	70 – 85 °C
Environmental Ambient Temperature (Max)	85 °C[185 °F]



Packaging Features

Packaging Method	Tray
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2023 (233) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # CAT-OE4-P299A

Slim PCB Relay, PCN 3A/5A 3VDC

Also in the Series | [OEG Slimline PCB Relay PCN](#)

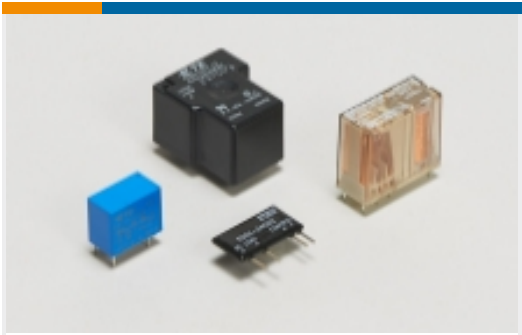

Power Relays(21)

Customers Also Bought



TE Part #7-1879254-0
RP 2B 40R2 0.1% 15PPM CUT LENGTH



TE Part #1-2329013-1
LUMAWISE 40MM DIA DOME CLEAR LOW



TE Part #1-2329013-2
LUMAWISE 40MM DIA DOME CLEAR TALL




TE Part #2329013-2
LUMAWISE 40MM DIA DOME SMOKE GRAY TALL



TE Part #2-1419153-2
OMIH-SS-124LM,300



TE Part #5-2176455-9
CPF 0402 442K 0.1% 25ppm 1K RL

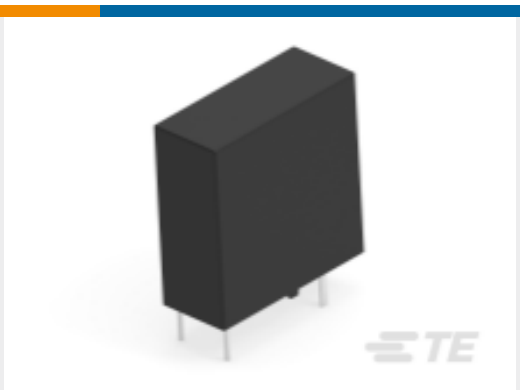

TE Part #1461056-6
SDT-S-112DMR,601

Documents

Product Drawings

PCJ-105D3MH,303

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1721531-4_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1721531-4_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1721531-4_G.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



Datasheets & Catalog Pages

PCJ Series Relay Data Sheet English

English

Product Specifications

Definitions General Purpose Relays

English