LCD / LCM SPECIFICATION



WINSTAR Display Co.,Ltd. 華凌光電股份有限公司



SPECIFICATION

CUSTOMER :

MODULE NO.:

WO12864C2-TFH#

APPROVED BY:		
(FOR CUSTOMER USE ONLY)	PCB VERSION:	DATA:

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

VERSION	DATE	REVISED PAGE NO.	SUMMARY
E	2014/09/30		Correct Response Time.

	instar Displa 凌光電股份有限		TD MODLE NO:
REC	ORDS OF REV	ISION	DOC. FIRST ISSUE
VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2009/01/15		First issue
А	2009/02/20		Correct IC=ST7565P
В	2011/05/03		Modify V0-VSS
С	2012/07/17		Modify Backlight
			Information
D	2013/11/21		Remove IC information
			Add Pull Tape
E	2014/09/30		Correct Response Time.

Contents

- 1.Module Classification Information
- 2.Precautions in use of LCD Modules
- **3.General Specification**
- 4. Absolute Maximum Ratings
- **5.**Electrical Characteristics
- **6.Optical Characteristics**
- 7.Interface Pin Function
- 8.Contour Drawing &Block Diagram
- 9.Reliability
- 10.Backlight Information
- 11.Inspection specification
- 12. Material List of Components for RoHs
- 13.Recommendable Storage

1.Module Classification Information

W	<u>0</u>	12864	<u>C2</u>	—	<u>T</u>	<u>F</u>	H	_	<u>#</u>
1	2	3	4		5	6	Ø		8

① Brand: WINSTAR DISPLAY CORPORATION

- ② Display Type : H→Character Type, G→Graphic Type , X→TAB Type, O→COG Type
- ③ Display Font : 128 * 64 dot
- ④ Model serials no.

5	Backlight Type :	$N \rightarrow Without backlight$	T→LED,	White	S \rightarrow LED, High light White
		$B \rightarrow EL$, Blue green	A→LED,	Amber	$L \rightarrow LED$, Full color
		D→EL, Green	R→LED,	Red	J→DIP LED,Blue
		$W \rightarrow EL$, White	O→LED,	, Orange	$K \rightarrow DIP LED, White$
		M→EL, Yellow Green	$G \rightarrow LED$	Green	$E \rightarrow DIP LED$, Yellow Green
		$F \rightarrow CCFL$, White	P→LED,	Blue	H→DIP LED,Amber
		Y→LED, Yellow Green	$X \rightarrow LED$, Dual color	$I \rightarrow DIP LED$, Red
		G→LED, Green	C→LED,	Full color	
6	LCD Mode :	B→TN Positive, Gray		V→FSTN	Negative, Blue
		N→TN Negative,		T→FSTN	Negative, Black
		$L \rightarrow VA$ Negative		D→FSTN	Negative (Double film)
		$H \rightarrow HTN$ Positive, Gray		F→FSTN	Positive
		I→HTN Negative, Black		K→FSC N	egative
		U→HTN Negative, Blue		S→FSC Po	ositive
		M→STN Negative, Blue		E→ISTN N	Negative, Black
		G→STN Positive, Gray		C→CSTN	Negative, Black
		$Y \rightarrow STN$ Positive, Yellow	Green	A→ASTN	Negative, Black
\bigcirc	LCD Polarize	$A \rightarrow Reflective, N.T, 6:00$	H→	Transflectiv	e, W.T,6:00
	Type/ Temperature	$D \rightarrow Reflective, N.T, 12:00$) K→'	Transflectiv	e, W.T,12:00
	range/ View	$G \rightarrow Reflective, W. T, 6:00$	C→	Fransmissiv	e, N.T,6:00
	direction	$J \rightarrow Reflective, W. T, 12:00$			e, N.T,12:00
		$B \rightarrow$ Transflective, N.T,6:0	0 I→T	ransmissive	e, W. T, 6:00
		$E \rightarrow$ Transflective, N.T.12:	00 L→	Fransmissiv	e, W.T,12:00
8	Special Code	#:Fit in with the ROHS Di	irections an	nd regulatio	ns

2.Precautions in use of LCD Modules

- (1)Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2)Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3)Don't disassemble the LCM.
- (4)Don't operate it above the absolute maximum rating.
- (5)Don't drop, bend or twist LCM.
- (6)Soldering: only to the I/O terminals.
- (7)Storage: please storage in anti-static electricity container and clean environment.
- (8) Winstar have the right to change the passive components, including R3,R6 & backlight adjust resistors. (Resistors, capacitors and other passive components will have different appearance and color caused by the different supplier.)
- (9)Winstar have the right to change the PCB Rev. (In order to satisfy the supplying stability, management optimization and the best product performance...etc, under the premise of not affecting the electrical characteristics and external dimensions, Winstar have the right to modify the version.)

3.General Specification

Item	Dimension	Unit
Number of Characters	128 x 64 dots	—
Module dimension	55.2x 39.8 x 6.5(MAX)	mm
View area	45.2 x 27.0	mm
Active area	40.92 x 24.28	mm
Dot size	0.28 x 0.34	mm
Dot pitch	0.32 x 0.38	mm
LCD type	FSTN Positive Transflective (In LCD production, It will occur slightly color of can only guarantee the same color in the same ba	
Duty	1/64 , 1/9 Bias	
View direction	6 o'clock	
Backlight Type	LED White	
IC	ST7565P	

4.Absolute Maximum Ratings

Item	Symbol	Min	Тур	Max	Unit
Operating Temperature	T _{OP}	-20	_	+70	°C
Storage Temperature	T _{ST}	-30	_	+80	°C
Power Supply Voltage	VDD	-0.3		3.6	V
Power supply voltage (VDD standard)	V0, VOUT	-0.3	_	14.5	V
Power supply voltage (VDD standard)	V1, V2, V3, V4	-0.3	_	V0+0.3	V

5.Electrical Characteristics


Item	Symbol	Condition	Min	Тур	Max	Unit
Supply Voltage For Logic	V_{DD} - V_{SS}	_	2.7	3.0	3.3	V
		Ta=-20°C	_	_		V
Supply Voltage For LCM	VOP	Ta=25℃	9.4	9.6	9.8	V
		Ta=70°C	_	—	_	V
Input High Volt.	V _{IH}		0.8 V _{DD}		V_{DD}	V
Input Low Volt.	V _{IL}		Vss	_	0.2 V _{DD}	V
Output High Volt.	V _{OH}		0.8 V _{DD}	_	V_{DD}	V
Output Low Volt.	V _{OL}		Vss	_	$0.2 V_{\text{DD}}$	V
Supply Current(No include LED Backlight)	I _{DD}	V _{DD} =3.0V	_	0.49	1.0	mA

NOTE 1: Please kindly consider to design the Vop to be adjustable while programing the software to match LCD contrast tolerance


6.Optical Characteristics

Item	Symbol	Condition	Min	Тур	Max	Unit
	θ	$CR \ge 2$	0	_	30	$\phi = 180^{\circ}$
View Angle	θ	$CR \ge 2$	0	_	60	$\phi = 0^{\circ}$
View Angle	θ	$CR \ge 2$	0	_	45	$\phi = 90^{\circ}$
	θ	$CR \ge 2$	0		45	$\phi = 270^{\circ}$
Contrast Ratio	CR			5		
Despense Time	T rise	_		200	300	ms
Response Time	T fall	—	_	250	350	ms

Definition of Operation Voltage (Vop)

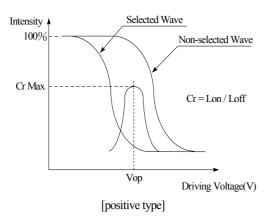


Definition of Response Time (Tr , Tf)

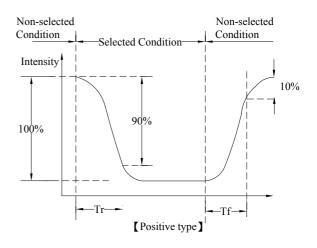

Conditions :

Operating Voltage : Vop Frame Frequency : 64 HZ Viewing Angle(θ , φ): 0° , 0° Driving Waveform : 1/N duty , 1/a bias

Definition of viewing angle(CR \geq 2)

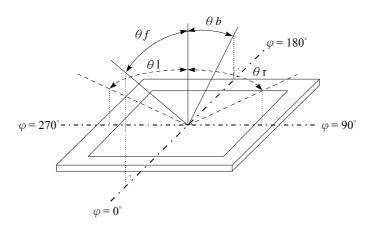


WINSTAR

7.Interface Pin Function

Pin No.	Symbol	Level			Des	cription		
1	IRS	Ι	IRS = "H IRS = "I	ninal selects the I": Use the inter L": Do not use the by an external	rnal resistor he internal	rs resistors. Tl	he V0 voltag	ge level is
2	/HPM	I	crystal d /HPM =	ne power contro rive. "H": Normal m "L": High powe	ode	for the powe	er supply cir	cuit for liquid
3	P/S	Ι	P/S = "HP/S = "LThe follo $P/S"H""L"When P//RD (E)$	the parallel data in the para	input. aput. epending of Data D0 to D7 SI (D7) D5 fixed) are fixed t	n the P/S sta Read/Write /RD, /WR Write only "H".	atus: Serial Clock X SCL (D6) " or "L".	
4	C86	I	This is th C86 = "I	ial data input, It ne MPU interfac H": 6800 Series L": 8080 Series	ce selection MPU inter	pin. face.	a from KAN	1
5	VR	Ι	Output v V0 throu IRS = "I		r terminal. I oltage divid age regulate	Provides the der. or internal r	esistors are 1	
6~10	V0~V4	Power Supply	This is a	multi-level pov	ver supply	for the liqui	d crystal dri	ve.
11	VRS	Power Supply		ne internal-outp oltage regulator	-	ower supply	y for the LC	D power
12	CAP4+	Ο		voltage converte 2N terminal.	er. Connect	a capacitor	between the	is terminal and

13	CAP2-	Ο	DC/DC voltage converter. Connect a capacitor between this terminal and the CAP2P terminal.
1.4	CAP2+	0	DC/DC voltage converter. Connect a capacitor between this terminal and
14	CAP2+	0	the CAP2N terminal.
15	CAP1+	0	DC/DC voltage converter. Connect a capacitor between this terminal and
15	CAFT	0	the CAP1N terminal.
16	CAP1-	0	DC/DC voltage converter. Connect a capacitor between this terminal and
10	0/11 1-	0	the CAP1P terminal.
17	CAP3+	0	DC/DC voltage converter. Connect a capacitor between this terminal and
17		0	the CAP1N terminal.
18	CAP5+	0	DC/DC voltage converter. Connect a capacitor between this terminal and
10		0	the CAP1N terminal.
19	VOUT	0	DC/DC voltage converter. Connect a capacitor between this terminal and
			vss or VDD
20	VSS	Power	Ground
		Supply Power	
21	VDD	Supply	Power supply
		Suppry	
22~29	D7~D0	I/O	Data bus line
			• When connected to 8080 series MPU, this pin is treated as the "/RD"
			• When connected to 8080 series MPU, this pin is treated as the "/RD" signal of the 8080 MPU and is LOW-active.
30	/RD(F)		
30	/RD(E)	I	signal of the 8080 MPU and is LOW-active.
30	/RD(E)	Ι	signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L".
30	/RD(E)	I	signal of the 8080 MPU and is LOW-active.The data bus is in an output status when this signal is "L".When connected to 6800 series MPU, this pin is treated as the "E"
30	/RD(E)	Ι	 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active.
30	/RD(E)	I	 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU.
30	/RD(E)	I	 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR"
			 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active.
30	/RD(E) /WR(RW)	I	 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR
			 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR signal.
			 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR signal. When connected to 6800 series MPU, this pin is treated as the "R/W" signal of the 6800 MPU and decides the access type : When R/W = "H": Read.
			 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR signal. When connected to 6800 series MPU, this pin is treated as the "R/W" signal of the 6800 MPU and decides the access type : When R/W = "H": Read. When R/W = "L": Write.
			 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR signal. When connected to 6800 series MPU, this pin is treated as the "R/W" signal of the 6800 MPU and decides the access type : When R/W = "H": Read. When R/W = "L": Write. This is connect to the least significant bit of the normal MPU address bus,
31	/WR(RW)	Ι	 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR signal. When connected to 6800 series MPU, this pin is treated as the "R/W" signal of the 6800 MPU and decides the access type : When R/W = "H": Read. When R/W = "L": Write. This is connect to the least significant bit of the normal MPU address bus, and it determines whether the data bits are data or command.
			 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR signal. When connected to 6800 series MPU, this pin is treated as the "R/W" signal of the 6800 MPU and decides the access type : When R/W = "H": Read. When R/W = "L": Write. This is connect to the least significant bit of the normal MPU address bus, and it determines whether the data bits are data or command. A0 = "H": Indicates that D0 to D7 are display data.
31	/WR(RW)	I	 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR signal. When connected to 6800 series MPU, this pin is treated as the "R/W" signal of the 6800 MPU and decides the access type : When R/W = "H": Read. When R/W = "L": Write. This is connect to the least significant bit of the normal MPU address bus, and it determines whether the data bits are data or command.
31	/WR(RW)	Ι	 signal of the 8080 MPU and is LOW-active. The data bus is in an output status when this signal is "L". When connected to 6800 series MPU, this pin is treated as the "E" signal of the 6800 MPU and is HIGH-active. This is the enable clock input terminal of the 6800 Series MPU. When connected to 8080 series MPU, this pin is treated as the "/WR" signal of the 8080 MPU and is LOW-active. The signals on the data bus are latched at the rising edge of the /WR signal. When connected to 6800 series MPU, this pin is treated as the "R/W" signal of the 6800 MPU and decides the access type : When R/W = "H": Read. When R/W = "L": Write. This is connect to the least significant bit of the normal MPU address bus, and it determines whether the data bits are data or command. A0 = "H": Indicates that D0 to D7 are display data.

8.Contour Drawing

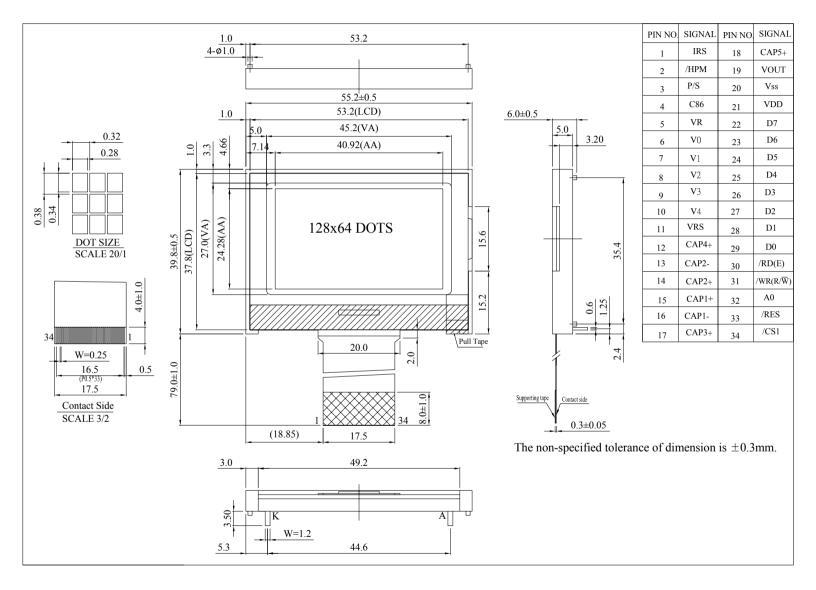

WINSTAR

9.Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

	Environmental Test		
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1
High Temperature/ Humidity storage	The module should be allowed to stand at 60 °C,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60°C ,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation $-20^{\circ}C$ $25^{\circ}C$ $70^{\circ}C$ 30min 5min 30min 1 cycle	-20°C/70°C 10 cycles	
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS= 800 V,RS= 1.5 k Ω CS= 100 pF 1 time	

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal

Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

10.Backlight Information


Specification

PARAMETER	SYMBOL	MIN	ТҮР	MAX	UNIT	TEST CONDITION
Supply Current	ILED	_	48	60	mA	V=3.5V
Supply Voltage	V	3.4	3.5	3.6	V	
Reverse Voltage	VR	_	_	5	v	_
Luminance (Without LCD)	IV	680	850	_	CD/M ²	ILED=48mA
LED Life Time (For Reference only)	_	_	50000	_	Hr.	ILED≦48mA 25℃,50-60%RH, (Note 1)
Color	White			1		

Note: The LED of B/L is drive by current only \ddagger driving voltage is only for reference

To make driving current in safety area (waste current between minimum and maximum).


Note 1:50K hours is only an estimate for reference.



11.Inspection specification

NO	Item	Criterion				AQL		
		Missing vertical, horizontal segment, segment contrast defect.						
		Missing character, dot or icon.						
		Display malfunction.						
01	Electrical	No function or no display.						
01	Testing	Current consumption exceeds product specifications.						
		LCD viewing angle defect.						
		Mixed product types.						
		Contrast defect	•					
	Black or	2.1 White and b	black spots	s on display ≤ 0.25	nm, no more than			
02	white spots on	three white or b	-		,	2.5		
-	LCD (display		•	-	or lines within 3mm			
	only)			Ĩ				
		3.1 Round type	· As follo	wing drawing				
		$\Phi = (x + y) / 2$. As 10110					
		$\Psi(\mathbf{x} + \mathbf{y})/2$	-	SIZE	Acceptable Q TY			
		│ → Ĥ ⊶	↓	$\Phi \leq 0.10$	Accept no dense	2.5		
			<u>т</u> ү	$0.10 < \Phi \le 0.20$	2			
	LCD black		•	$0.20 < \Phi \le 0.25$	1			
	spots, white			$0.25 < \Phi$	0			
03	spots,	3.2 Line type :	(A a fallow	ving drawing)				
	contamination	5.2 Line type .	`	Width	A agantable O TV			
	(non-display)	*	Length	$W \le 0.02$	Acceptable Q TY			
		\sim $\frac{w}{1}$	L≦3.0	$w \ge 0.02$ 0.02 < W ≤ 0.03	Accept no dense			
			$L \leq 3.0$ $L \leq 2.5$	$\begin{array}{c} 0.02 < W \leq 0.03 \\ \hline 0.03 < W \leq 0.05 \end{array}$	- 2	2.5		
				$0.05 < W \ge 0.05$	A s norm d terms			
				0.03 < W	As round type			
		If bubbles are v	visible.	Size Φ	Acceptable Q TY			
		judge using black spot		$\Phi \leq 0.20$	Accept no dense			
04	Polarizer	specifications,	-	$0.20 < \Phi \le 0.50$	3	2.5		
	bubbles	to find, must ch	-	$0.50 < \Phi \le 1.00$	2			
		specify direction.		1.00<Φ	0			
				Total Q TY	3			

	Item	Criterion			AQL
05	Scratches	Follow NO.3 LCD bl	ack spots, white spots, o	contamination	
		k: Seal widthL: Electrode pad leng6.1 General glass chip		LCD side length	
06	Chipped glass	z: Chip thickness $Z \leq 1/2t$ $1/2t < z \leq 2t$	y: Chip width Not over viewing area Not exceed 1/3k	x: Chip length $x \le 1/8a$ $x \le 1/8a$	2.5
		⊙ If there are 2 or mo 6.1.2 Corner crack:	ore chips, x is total lengt	h of each chip.	
		z: Chip thickness	v: Chip width	x: Chip length	1
		z: Chip thickness $Z \le 1/2t$	y: Chip width Not over viewing area	x: Chip length $x \le 1/8a$	

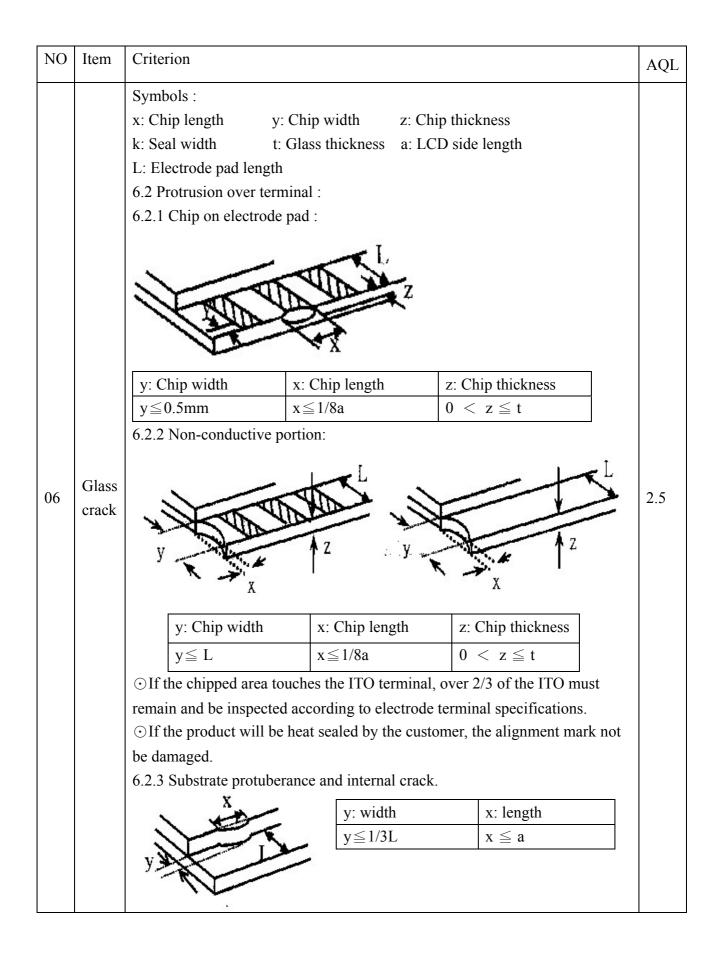

NO	Item	Criterion	AQL
07	Cracked glass	The LCD with extensive crack is not acceptable.	2.5
		8.1 Illumination source flickers when lit.	0.65
00	Backlight	8.2 Spots or scratched that appear when lit must be judged.	2.5
08	elements	Using LCD spot, lines and contamination standards.	
		8.3 Backlight doesn't light or color wrong.	0.65
		9.1 Bezel may not have rust, be deformed or have fingerprints,	2.5
09	Bezel	stains or other contamination.	
		9.2 Bezel must comply with job specifications.	0.65
		10.1 COB seal may not have pinholes larger than 0.2mm or	2.5
		contamination.	
		10.2 COB seal surface may not have pinholes through to the IC.	2.5
		10.3 The height of the COB should not exceed the height	0.65
		indicated in the assembly diagram.	
		10.4 There may not be more than 2mm of sealant outside the	2.5
		seal area on the PCB. And there should be no more than three	
		places.	
		10.5 No oxidation or contamination PCB terminals.	2.5
10	PCB、COB	10.6 Parts on PCB must be the same as on the production	0.65
10		characteristic chart. There should be no wrong parts, missing	
		parts or excess parts.	
		10.7 The jumper on the PCB should conform to the product	0.65
		characteristic chart.	
		10.8 If solder gets on bezel tab pads, LED pad, zebra pad or	2.5
		screw hold pad, make sure it is smoothed down.	
		10.9 The Scraping testing standard for Copper Coating of PCB	2.5
		X	
		\mathbf{Y} X * Y<=2mm2	
		11.1 No un-melted solder paste may be present on the PCB.	2.5
		11.2 No cold solder joints, missing solder connections,	2.5
11	Soldering	oxidation or icicle.	
		11.3 No residue or solder balls on PCB.	2.5
		11.4 No short circuits in components on PCB.	0.65

NO	Item	Criterion	AQL
		12.1 No oxidation, contamination, curves or, bends on interface	2.5
		Pin (OLB) of TCP.	
		12.2 No cracks on interface pin (OLB) of TCP.	0.65
		12.3 No contamination, solder residue or solder balls on product.	2.5
		12.4 The IC on the TCP may not be damaged, circuits.	2.5
		12.5 The uppermost edge of the protective strip on the interface	2.5
		pin must be present or look as if it cause the interface pin to sever.	
	Comonal	12.6 The residual rosin or tin oil of soldering (component or chip	2.5
12	General	component) is not burned into brown or black color.	
	appearance	12.7 Sealant on top of the ITO circuit has not hardened.	2.5
		12.8 Pin type must match type in specification sheet.	0.65
		12.9 LCD pin loose or missing pins.	0.65
		12.10 Product packaging must the same as specified on packaging	0.65
		specification sheet.	
		12.11 Product dimension and structure must conform to product	0.65
		specification sheet.	
		12.12 Visual defect outside of VA is not considered to be rejection.	0.65

<u>12.Material List of Components for</u> <u>RoHs</u>

 WINSTAR Display Co., Ltd hereby declares that all of or part of products (with the mark "#"in code), including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

Exhibit A: The Harmful Material List

Material	(Cd)	(Pb)	(Hg)	(Cr6+)	PBBs	PBDEs
Limited Value	100 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm
Above limited value is set up according to RoHS.						

2.Process for RoHS requirement :

- (1) Use the Sn/Ag/Cu soldering surface ; the surface of Pb-free solder is rougher than we used before.
- (2) Heat-resistance temp. :

Reflow : 250° C,30 seconds Max. ;

Connector soldering wave or hand soldering $: 320^{\circ}C, 10$ seconds max.

(3) Temp. curve of reflow, max. Temp. : 235 \pm 5°C ;

Recommended customer's soldering temp. of connector : 280°C, 3 seconds.

13.Recommendable Storage

- 1. Place the panel or module in the temperature 25°C±5°C and the humidity below 65% RH
- 2. Do not place the module near organics solvents or corrosive gases.
- 3. Do not crush, shake, or jolt the module.

	winstar <u>LCM Samp</u>	le Estima	te Feedback Sheet
Modul	e Number:		Page: 1
1 \ <u>1</u>	Panel Specification :		
1.	Panel Type :	Pass	□ NG ,
2.	View Direction :	Pass	□ NG ,
3.	Numbers of Dots :	Pass	□ NG ,
4.	View Area :	Pass	□ NG ,
5.	Active Area :	Pass	□ NG ,
6.	Operating Temperature :	Pass	□ NG ,
7.	Storage Temperature :	Pass	□ NG ,
8.	Others :		
<u>2 · 1</u>	Mechanical Specification :		
1.	PCB Size :	Pass	□ NG ,
2.	Frame Size :	Pass	□ NG ,
3.	Materal of Frame :	Pass	□ NG ,
4.	Connector Position:	Pass	□ NG ,
5.	Fix Hole Position :	Pass	□ NG ,
6.	Backlight Position :	Pass	□ NG ,
7.	Thickness of PCB:	Pass	□ NG ,
8.	Height of Frame to PCB :	Pass	□ NG ,
9.	Height of Module :	Pass	□ NG ,
10). Others :	Pass	□ NG ,
<u>3 - 1</u>	Relative Hole Size:		
1.	Pitch of Connector :	Pass	□ NG ,
2.	Hole size of Connector :	Pass	□ NG ,
3.	Mounting Hole size :	Pass	□ NG ,
4.	Mounting Hole Type :	Pass	□ NG ,
5.	Others :	Pass	□ NG ,
4 ∖ <u>I</u>	Backlight Specification [:]		
1.	B/L Type :	Pass	□ NG ,
2.	B/L Color :	Pass	□ NG ,
3.	B/L Driving Voltage (Refere	nce for LEI	D Type) : \Box Pass \Box NG ,
4.	B/L Driving Current :	Pass	\square NG ,
5.	Brightness of B/L:	Pass	□ NG ,
6.	B/L Solder Method :	Pass	□ NG ,
7.	Others :	Pass	□ NG ,
		>> Go	b to page 2 $<<$

winstar

Module Number :

5 · <u>Electronic Characteristics of Module</u> :

- 1. Input Voltage :□ Pass2. Supply Current :□ Pass
- 3. Driving Voltage for LCD : Pass

- 6. Negative Voltage Output : 🗌 Pass
- 7. Interface Function :

Pass

Pass

Pass

- 8. LCD Uniformity :
- 9. ESD test :
- 10. Others :

6 \ <u>Summary</u> :

Page: 2

□ NG ,
□ NG ,
□ NG ,
□ NG ,
🗌 NG ,
🗌 NG ,
🗌 NG ,
□ NG ,
□ NG ,
\square NG.

Sales signature : _____

Customer Signature :

Date : / /