


9137 012 11602M

Brand Name	XITANIUM
Description	Xitanium 150W .70A 1-10V sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Electrical Specifications

Output Power (W)	Output Voltage (V)	Output Current (A)	Efficiency @ Max Load	Tcase max	Input Current at 240V (A)	Max. Input Power (W)	Inrush Current (A _{pk} /50%- μ s)	Max. THD (%)	Power Factor @ Max Load	Surge Protection Common/Diff (KV)	Weight (lbs/grams)	IP Rating
150	60~210	0.70	>92%	80°C	0.69	165	130/165	20	>0.98	3/3	2.8/1270	IP66

Wire Diagram

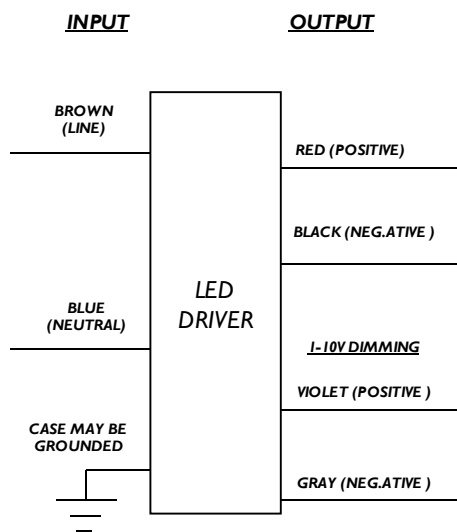


Input and output use lead-wires.
Lead-wires are 18AWG 105C/600V solid copper.

Standard Lead Length is 280mm+/-10mm on all wires outside the can

Dimming Method	Dimming Range (%)	Min. Output Power(W)	Dimming Source Current
1-10V Isolated	10% ~ 100%	42	150uA

Enclosure

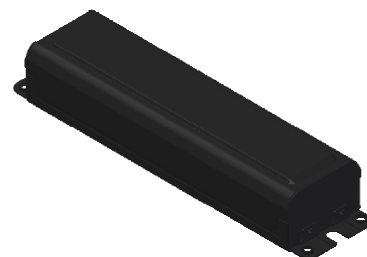

	in. (mm)
Case Length	8.38 (211.1)
Case Width	2.35 (59.1)
Case Height	1.47 (37.1)
Mounting Length	9.0 (226.2)
Mounting Width	1.7 (42.9)
Overall Length	9.54 (240.5)



Revised 08/12/2010

PHILIPS LIGHTING N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



9137 012 11602M

Brand Name	XITANIUM
Description	Xitanium 150W .70A 1-10V sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Electrical Specifications

Product Data

Order code	Add M to the end of the below numbers
Full product code	913701211602M 150W 0.7A 1-10V Dim
Full product name	LED Xitanium EU 220-240V 150W .70 210V 1-10V Dim
Net weight per piece	1.27 KG / 2.8 lbs
Interface	1-10V Dimming
Ambient Temp Range	-40C to +55C
Corresponding TC	-15C to +80C
Line Voltage	220-240V
Line Current	0.69A
Line Frequency	50/60Hz
IP Classification	66
Life @ Tcase 67C	80000 hr [nom] refer to graph below
Life @ Tcase 75C	50000 hr [nom] refer to graph below
Suitable for Outdoor use?	Yes
Max TC	80C
Inrush current Width	130 A @ 230V Line @ 165uS Width @50% height, see graph
Maximum ballast number on MCB 16A	TBD [max]
LED Current Tolerance	-5%/+5%
Earth leakage current	0.7 mA [max]
Mains voltage safety (AC)	-27%/+10%
Mains voltage performance (AC)	-10%/+10%
Min. Mains voltage operational	180 V [min]
Output peak voltage	300 V [max]
Output Current ripple	25% @700 mA (ripple = pk-pk/avg)
THD total	< 20%
THD 3rd Harmonic	< 15%
PF @ Max Load	>0.95
Wire Isolation	All wires are Double isolated

Installation & Application Notes:

Section I – Physical Characteristics

- 1.1 LED Driver shall be installed inside an electrical enclosure
- 1.2 Wiring inside electrical enclosure shall comply with 600V/105°C rating or higher.

Section II – Performance

- 2.1 LED Driver has an operating ambient temperature range of -20°C to 55°C.
- 2.2 LED Driver has a maximum life expectancy of 50,000 hours at Tcase of ≤ 75°C.
- 2.3 LED Driver has a maximum life expectancy of 100,000 hours at Tcase of ≤ 63°C.
- 2.4 LED Driver has a maximum self rise of 25°C in open air without heat sink.
- 2.5 LED Driver maximum allowable case temperature is 80°C – see product label for measurement location
- 2.6 LED Driver reduces output power to LEDs if its case temperature exceeds 80°C.
- 2.7 LED Driver has a failure rate ≤ 0.01% per 1,000 hours at Tcase ≤ 70°C.
- 2.8 LED Driver has a failure rate of 0.01% - 0.02% per 1,000 hours at Tcase of 70°C - 80°C.
- 2.9 LED Driver tolerates sustained open circuit and short circuit output conditions without damage.
- 2.10 LED Driver complies with the requirements of CE, ENEC and CISPR 15 Ed 7.2.

Revised 08/12/2010

PHILIPS LIGHTING N.A.



10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
 Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



9137 012 11602M

Brand Name	XITANIUM
Description	Xitanium 150W .70A I-10V sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Electrical Specifications

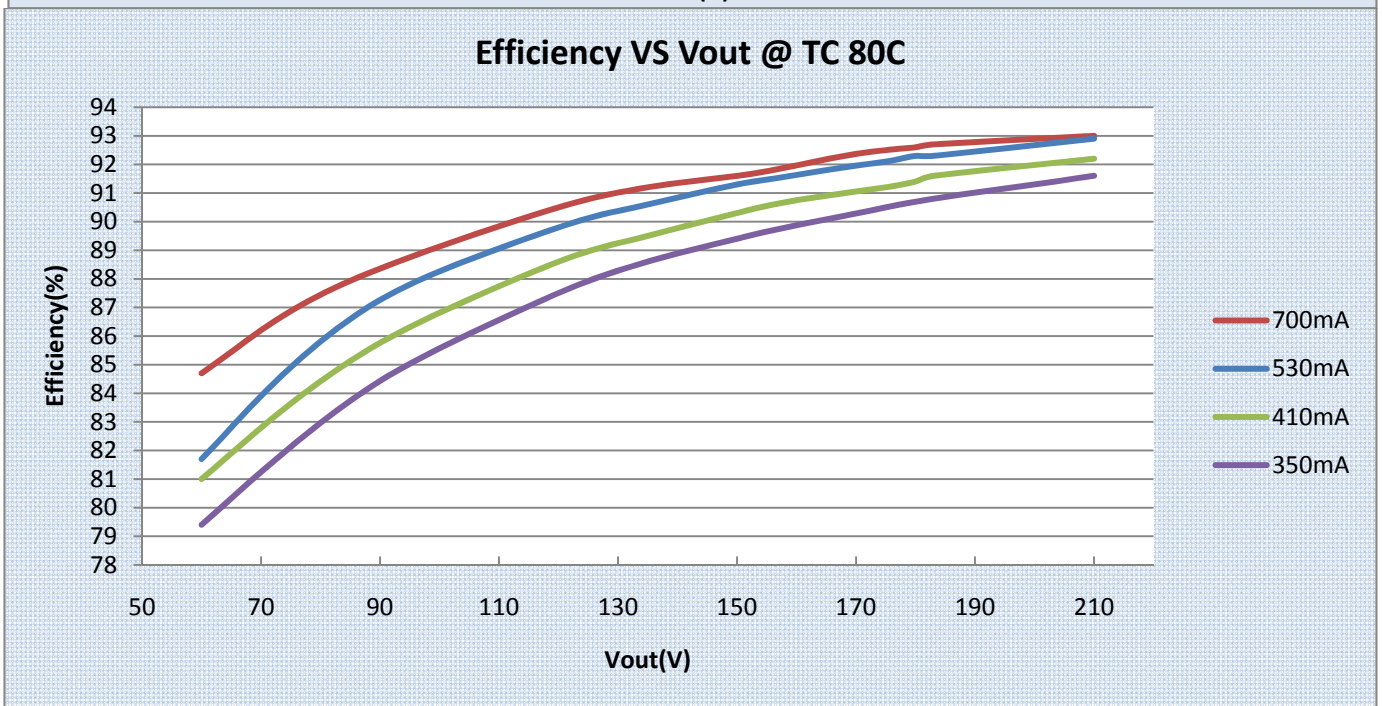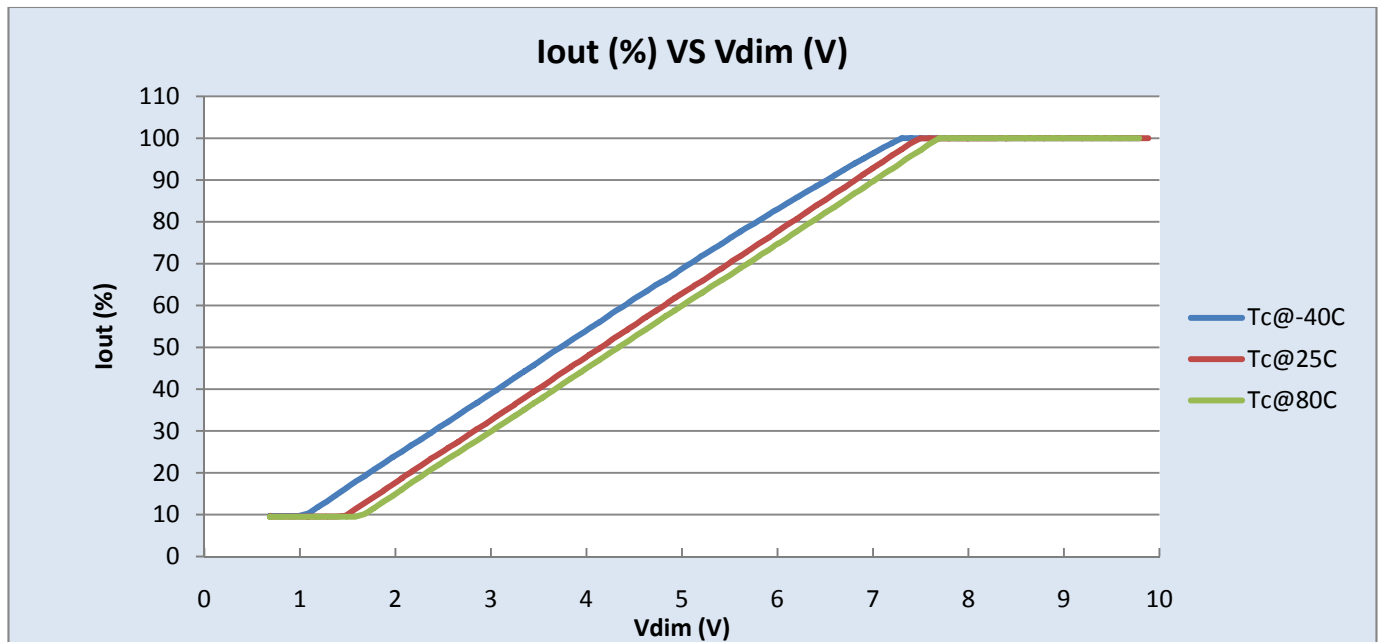

Revised 08/12/2010

PHILIPS LIGHTING N.A.



10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



9137 012 11602M

Brand Name	XITANIUM
Description	Xitanium 150W .70A I-10V sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Electrical Specifications

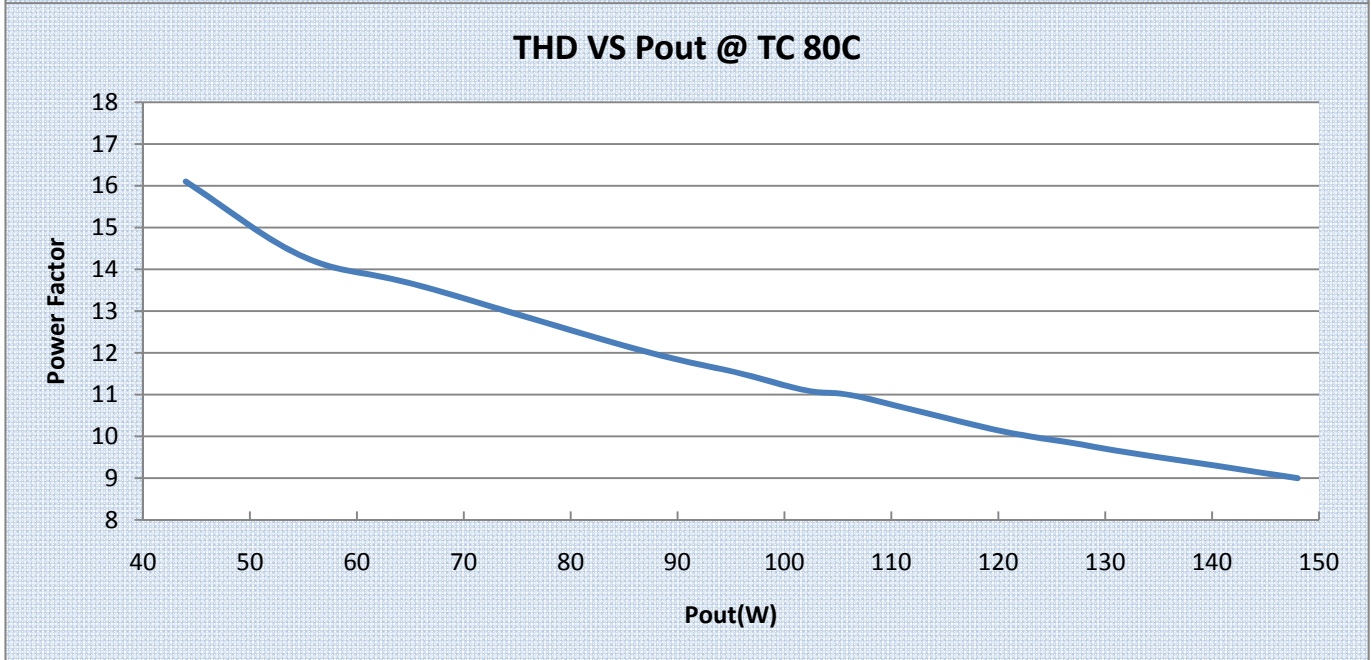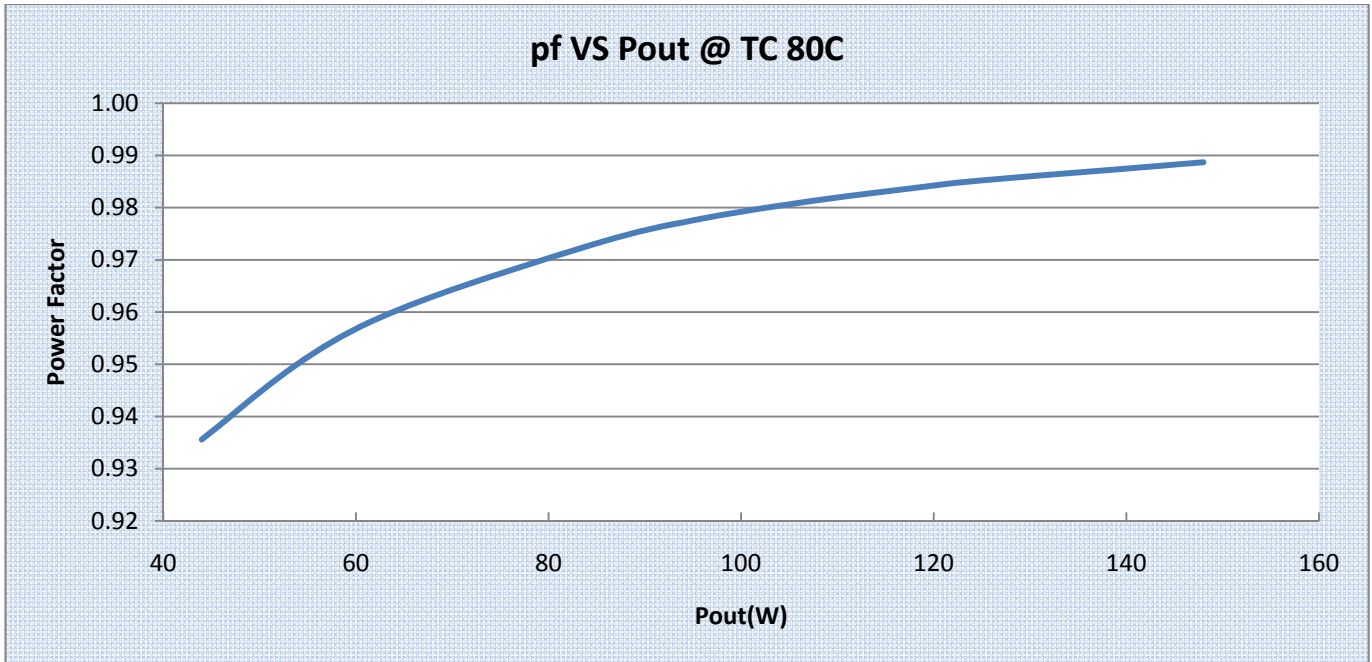

Revised 08/12/2010

PHILIPS LIGHTING N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886





9137 012 11602M

Brand Name	XITANIUM
Description	Xitanium 150W .70A I-10V sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Electrical Specifications

I_{out} VS TC of Driver:

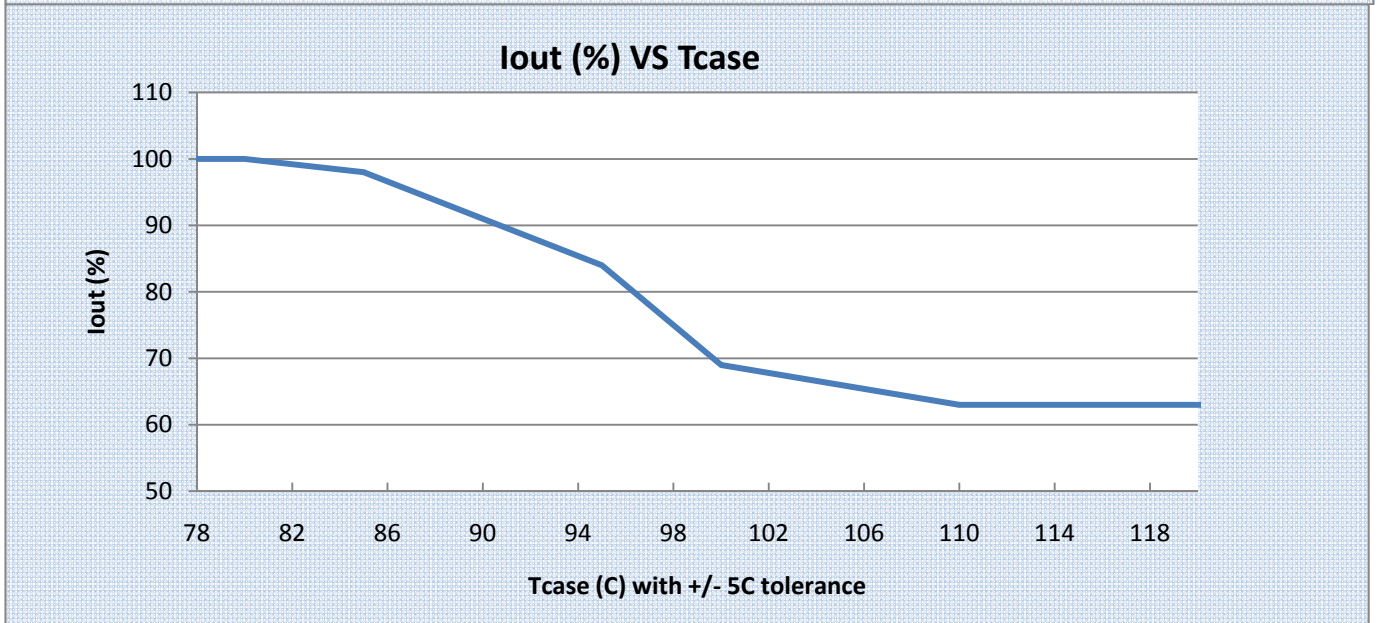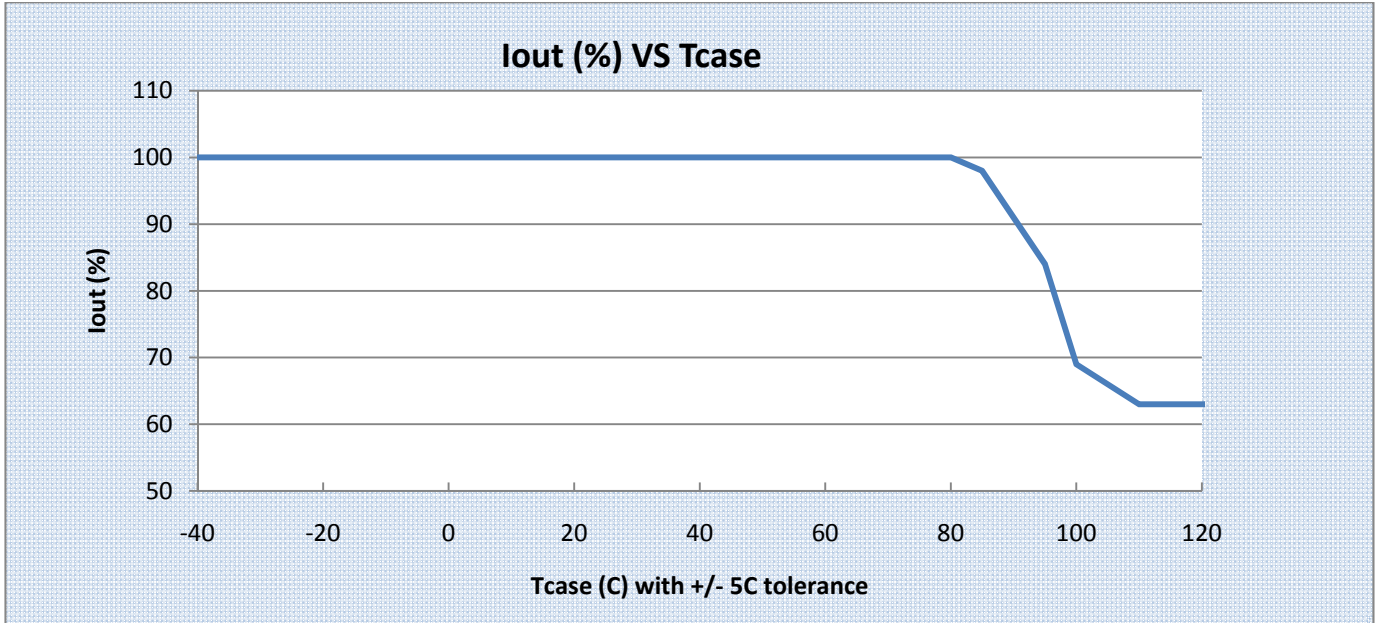

Revised 08/12/2010

PHILIPS LIGHTING N.A.


10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



9137 012 11602M


9137 012 11602M	
Brand Name	XITANIUM
Description	Xitanium 150W .70A I-10V sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Electrical Specifications

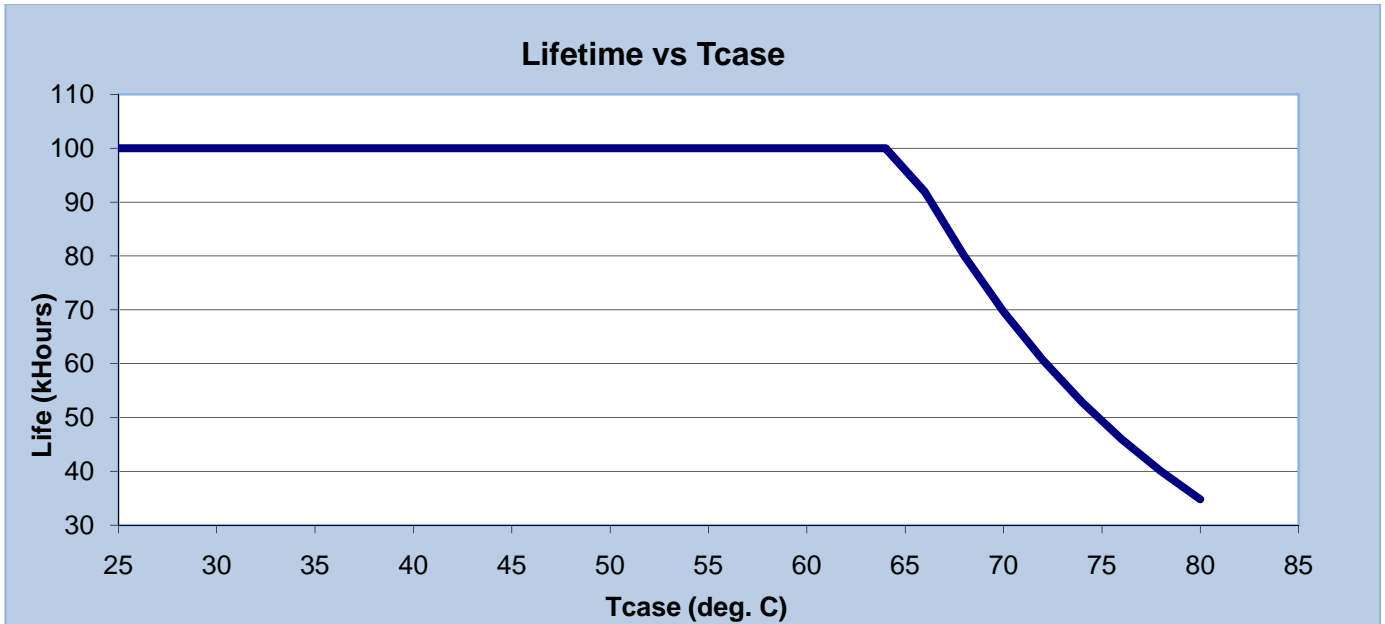

Failure Rate Info:

1. <0.01% per 1kHr @ <= Tcase 70C
2. <0.02% per 1kHr @ Tcase between 70C and 80C.

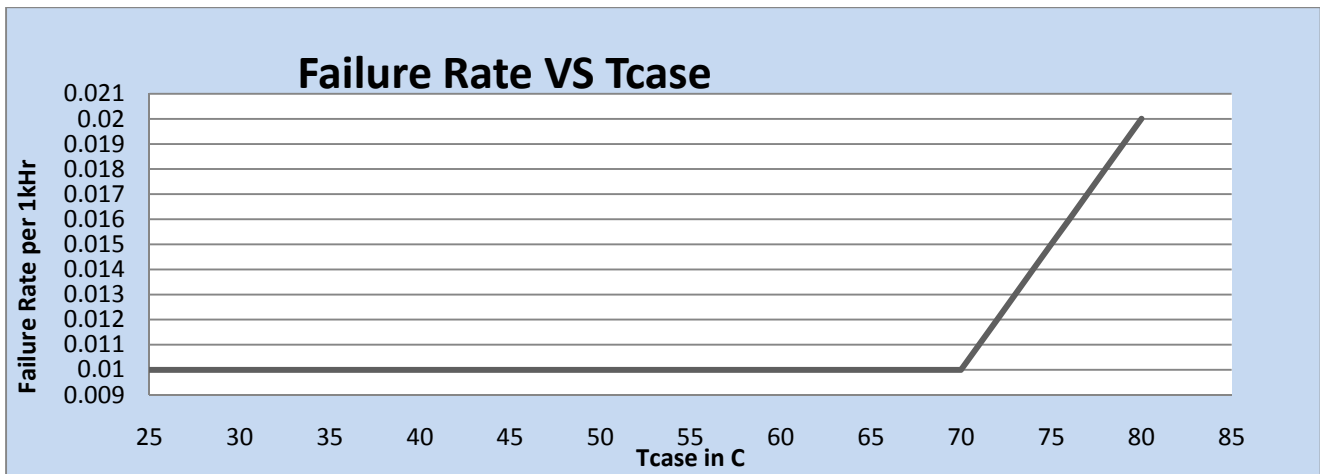

Revised 08/12/2010

PHILIPS LIGHTING N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886




9137 012 11602M

Brand Name	XITANIUM
Description	Xitanium 150W .70A I-10V sXt
Input Voltage	220~240
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Electrical Specifications

Inrush Current Info:

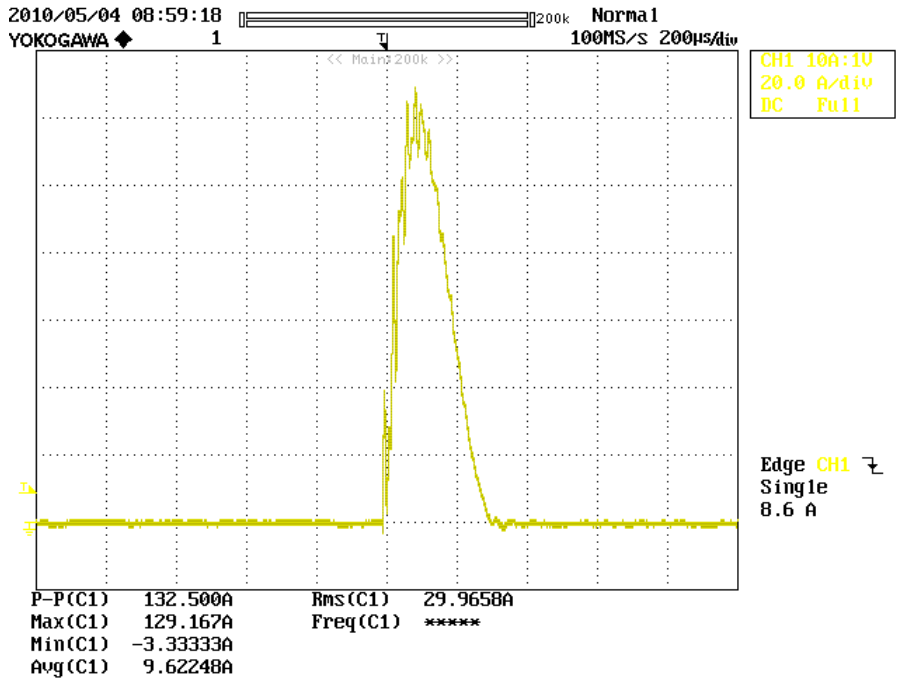

Ipeak	130 A
50% Width	165µS

Revised 08/12/2010

PHILIPS LIGHTING N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886