
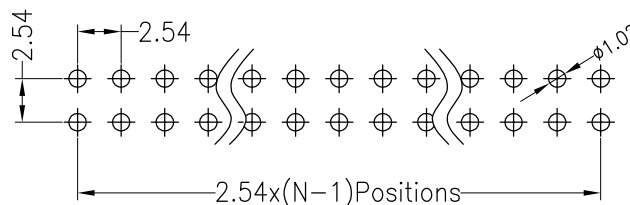
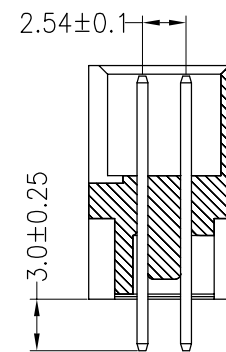
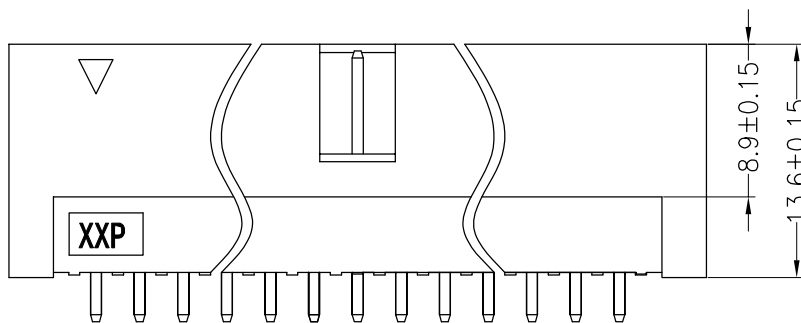


**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

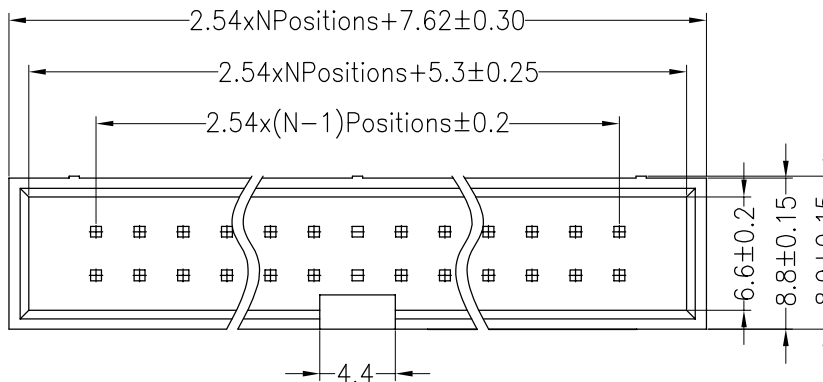

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

				OPERATION		DRAW	OuYangHui	16.04.02	SCALE	FIT	NINGBO KLS ELECTRONIC CO; LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	L-KLS1-202A-10-S-B
				X.XXX	±0.10				SHEET	1/1		
A0	2016.04.02	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	2.54DC3 H13.6 NPIN
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							
1	2	3	4	5	6	7	8	9				