




TDA8199

STEREO AMPLIFIER AND DC VOLUME CONTROL FOR TV

- Stereo Circuit
- DC Volume Control
- 12dB Maximum Gain

DESCRIPTION

The TDA8199 is a monolithic integrated circuit in DIP8 package intended for TV applications.



**DIP8
(Plastic Package)**

ORDER CODE: TDA8199

Figure 1. Pin Connections


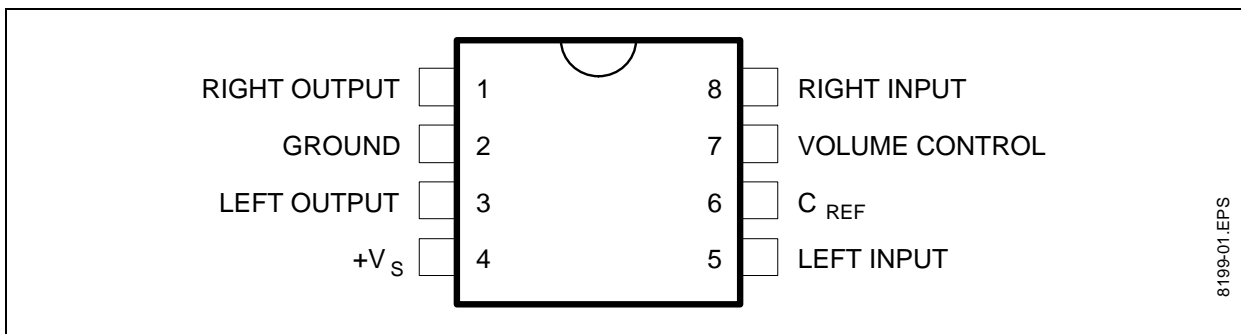


Figure 2. Block Diagram

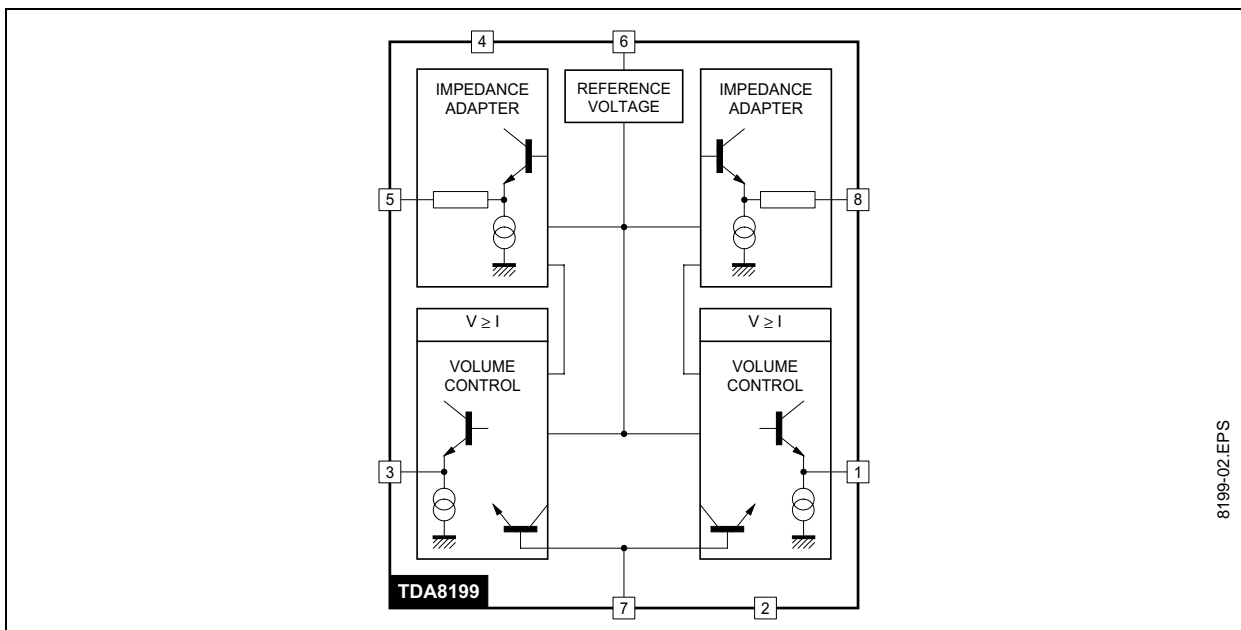

TDA8199

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_S	Supply Voltage (pin 1)	16	V
T_{stg}	Storage Temperature	- 55 to 125	°C
T_{oper}	Operating Ambient Temperature	0 to 70	°C

ELECTRICAL CHARACTERISTICS

Measured according to the following conditions, unless otherwise specified : $T_{amb} = 25^{\circ}\text{C}$, $V_S = +12\text{V}$.

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_S	Supply Voltage	10.8	12	13.2	V
I_S	Supply Current ($V_{IN} = 0$, $V_C = 0.5\text{V}$)		21	28	mA
V_{REF}	Reference Voltage		6.9		V
V_i	Audio Input Amplitude		0.125	0.5	V_{RMS}
THD1	Distortion for $V_i = 0.25 V_{RMS}$ at Max. Volume		0.35	1	%
THD2	Distortion for $V_O = 2 V_{RMS}$			5	%
DK	DC Volume Control Range at $V_i = 0.5 V_{RMS}$	70	90		dB
Kmin	Output/Input Gain for Max. Volume ($V_C = 5\text{V}$)		12		dB
dK	Gain Difference between Channels at $V_C = 5\text{V}$		0		dB
C_C	Crosstalk between Channels ($R_L > 10\text{k}\Omega$ and $F = 1\text{kHz}$)		70		dB
R_i	Audio Input Resistance		22		$\text{k}\Omega$
R_O	Audio Output Resistance		0.3	1	$\text{k}\Omega$
	Output Noise Level at $V_C = 5\text{V}$ (weighted curve : DIN45405)		300		μV_{RMS}
	Volume Control Input Current (Pin 7) at $V_C = 0\text{V}$		- 25		μA
	Volume Thermal Stability ($K = 30\text{dB}$, $0 < T_{amb} < 60^{\circ}\text{C}$)		0.04		$\text{dB}/^{\circ}\text{C}$

Figure 3. Gain versus Volume Control

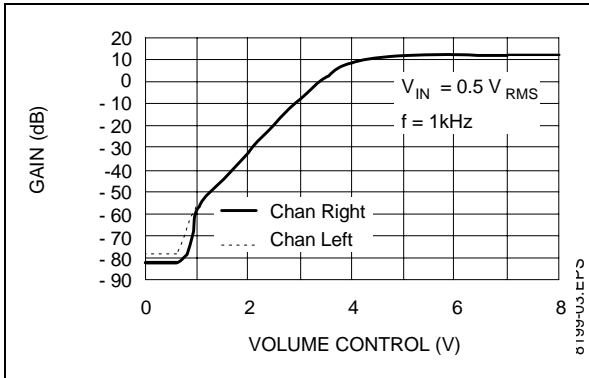


Figure 5. Distortion versus Volume Control

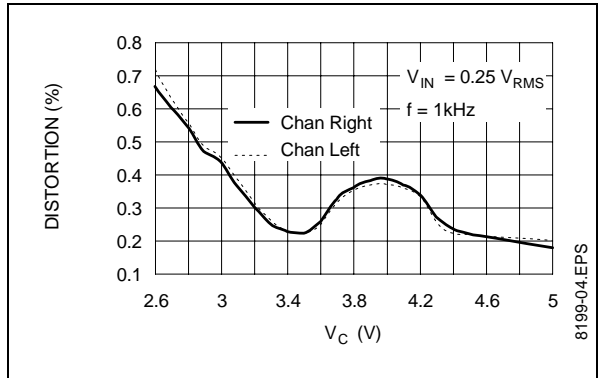


Figure 4. Distortion Rate versus Voltage Input

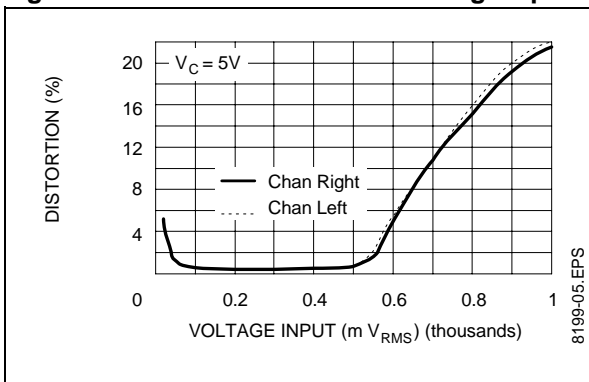


Figure 6. Supply Voltage Rejection


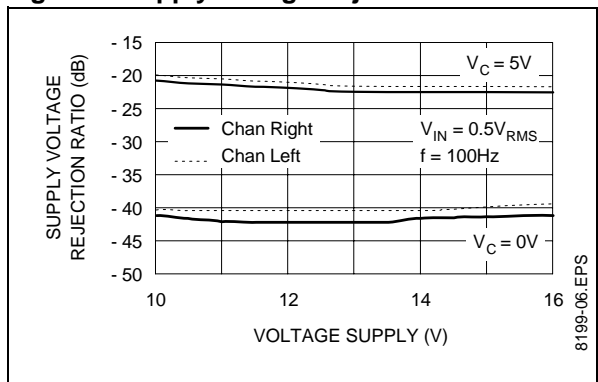


Figure 7. Application Diagram

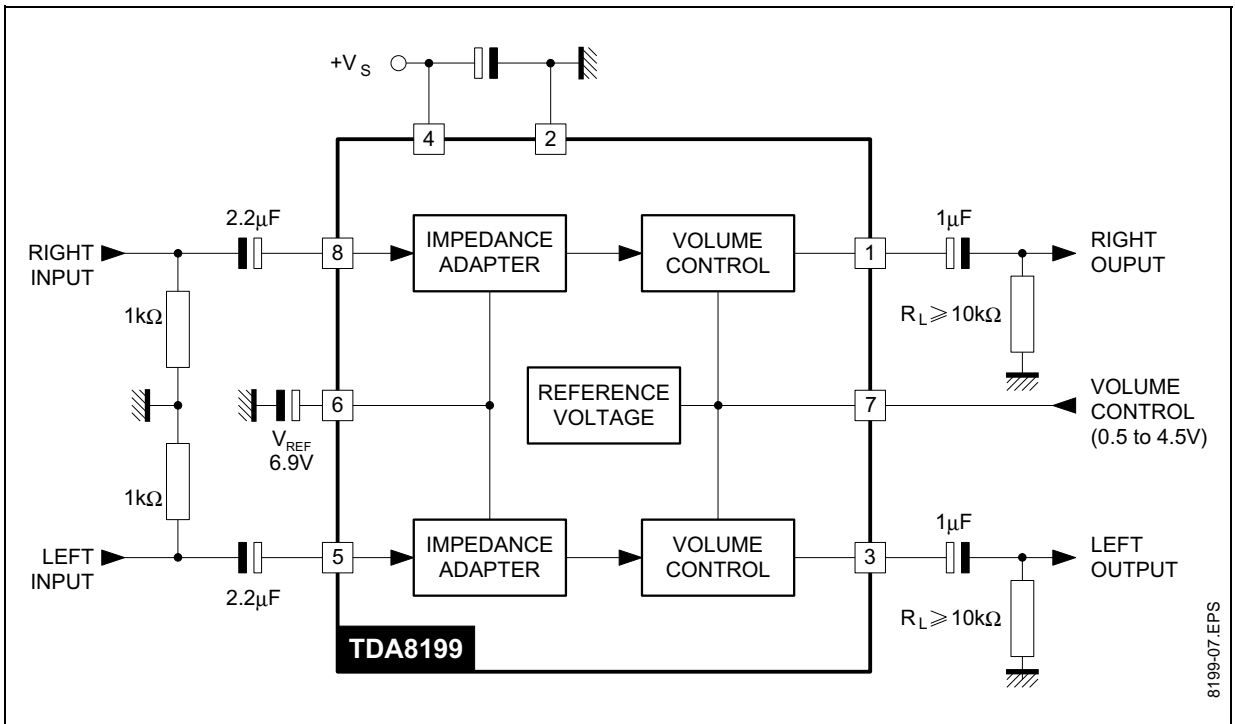


TDA8199

PACKAGE MECHANICAL DATA

8-PINS - PLASTIC DIP

Figure 8. 8-Pin Package

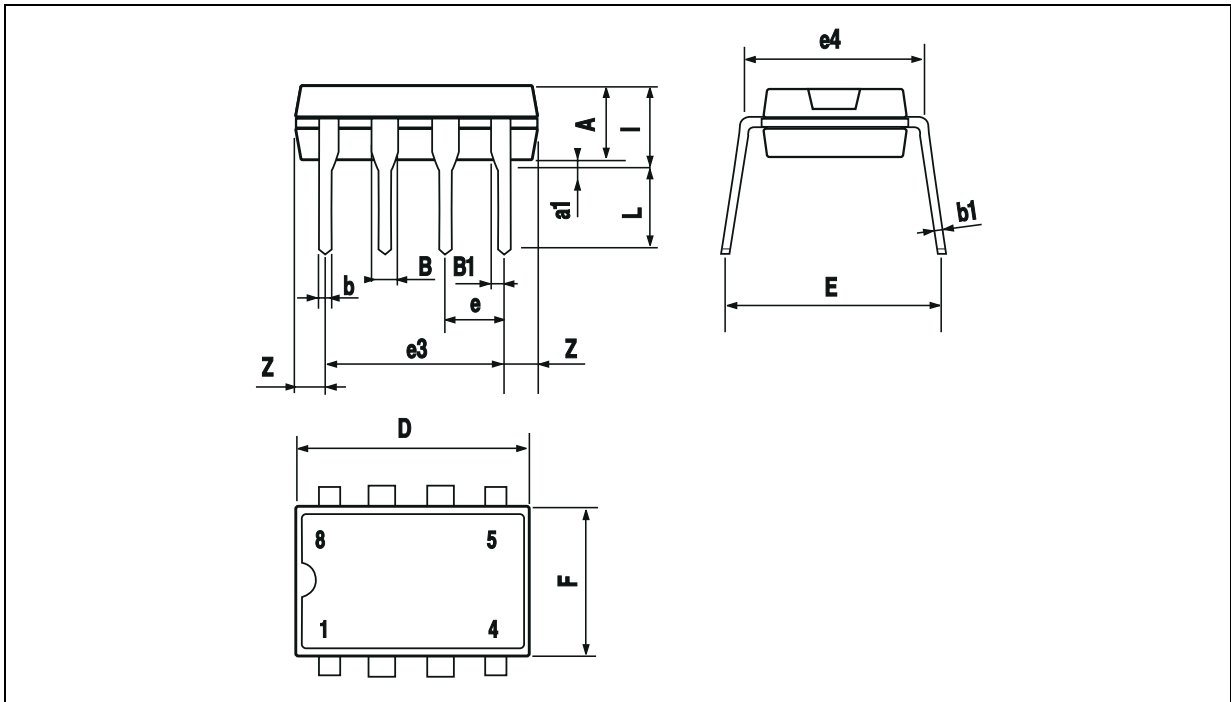

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without the express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

©2003 STMicroelectronics - All Rights Reserved.

Purchase of I²C Components by STMicroelectronics conveys a license under the Philips I²C Patent. Rights to use these components in an I²C system is granted provided that the system conforms to the I²C Standard Specification as defined by Philips.

STMicroelectronics Group of Companies

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain
Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>