

MORNSUN®

URA_LD-15WR2 & URB_LD-15WR2 SERIES 15W, WIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER




Patent Protection RoHS

FEATURES

- Efficiency up to 90%
- 4:1 wide input voltage range
- Low temperature rise
- Short circuit protection
- 1.5KVDC isolation
- Operating temperature range: -40°C ~ +85°C
- Six-sided metal shield
- Industry standard pinout
- Industrial level specifications
- Meet CISPR22/EN55022 CLASS A

PART NUMBER SYSTEM

URB2405LD-15WR2



APPLICATION

URA_LD-15WR2 & URB_LD-15WR2 series are applied to wide voltage range input situation such as data transmission device, battery power supply device, telecommunication device, distributed power supply system, remote control system, industrial robot system etc.

SELECTION GUIDE

Model Number	Input Voltage(VDC)		Output Voltage (VDC)	Output Current (mA)		Input Current (mA)(typ.)		Reflected Ripple Current (mA,typ.)	Max. Capacitive Load [#] (μF)	Efficiency (%. typ.) @ Max. Load		
	Nominal (Range)	Max**		Max.	Min.	@ Max. Load	@ No Load					
*URA2405LD-15WR2	24 (9-36)	40	±5	±1500	±75	727	20	30	4800	86		
*URA2412LD-15WR2			±12	±625	±32	710	15		800	88		
*URA2415LD-15WR2			±15	±500	±25	710	15		500	88		
URB2403LD-15WR2			3.3	4000	200	633	45		10200	87		
URB2405LD-15WR2			5	3000	150	695	45		4020	90		
URB2412LD-15WR2			12	1250	63	703	15		1035	89		
URB2415LD-15WR2			15	1000	50	703	15		705	89		
URB2424LD-15WR2			24	625	31	695	20		470	90		
*URA4805LD-15WR2			48 (18-75)	80	±5	±1500	±75		363	20	4800	86
*URA4812LD-15WR2					±12	±625	±32		355	15	800	88
*URA4815LD-15WR2	±15	±500			±25	351	15	500	89			
URB4803LD-15WR2	3.3	4000			200	316	35	10200	87			
URB4805LD-15WR2	5	3000			150	351	35	4020	89			
URB4812LD-15WR2	12	1250			63	355	10	1035	88			
URB4815LD-15WR2	15	1000			50	347	10	705	90			

Note:1. *Designing. **Input voltage can't exceed this value, or will cause the permanent damage.

2. # For each output.

3. Add suffix "H" for heat sink mounted, for example URA2405LD-15WHR2.

INPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1sec.max.)	24VDC input	--	--	50	VDC
	48VDC input	--	--	100	
Start-up Voltage	24VDC input	--	--	9	
	48VDC input	--	--	17.8	
Under Voltage Shutdown	24VDC input	7.5	--	--	
	48VDC input	16	--	--	
Start-up Time	Nominal input & constant resistance load	--	10	--	ms
Ctrl [†]	Models ON	Ctrl open or connect TTL high level (2.5-12VDC)			
	Models OFF	Ctrl connect GND or low level (0-1.2VDC)			
	Input current (Models OFF)	--	1	--	mA

Input Filter		π Filter
Note: *The CTRL control pin voltage is refer to GND.		

OUTPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Power		0.75	--	15	W
Positive Voltage Accuracy	Refer to recommended circuit	--	± 1	± 3	%
Negative Voltage Accuracy					
Output Voltage Balance	Dual output, balanced loads	--	± 0.5	± 1	
Line Regulation	Full load, input voltage from low to high	--	± 0.2	± 0.5	
Load Regulation	10% to 100% load	--	± 0.5	± 1	
Cross Regulation	Dual output, main output 50% load, Supplement output from 10% to 100% load	--	--	± 5	
Transient Recovery Time	25% load step change	--	300	500	
Transient Response Deviation		--	± 3	± 5	%
Temperature Drift	Full load	--	± 0.02	--	%/°C
Ripple & Noise*	20MHz bandwidth	--	70	100	mVp-p
Trim		--	$\pm 10\%$	--	VDC
Output Over Voltage Protection	3.3VDC output	--	3.9	--	
	5VDC output	--	6.2	--	
	12VDC output	--	15	--	
	15VDC output	--	18	--	
	24VDC output	--	30	--	
Over Current Protection	Input voltage range	--	160	--	%
Short Circuit Protection		Hiccup, Continuous, automatic recovery			
Note: * Ripple and noise tested by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.					

COMMON SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit	
Isolation Voltage	Tested for 1 minute and leakage current less than 1 mA	1500	--	--	VDC	
Isolation Resistance	Test at 500VDC	1000	--	--	M Ω	
Isolation Capacitance	Input/Output, 100KHz/0.1V	24VDC output	--	2000	--	pF
		Others	--	1000	--	
Switching Frequency		--	300	--	KHz	
MTBF	MIL-HDBK-217F @25°C	1000	--	--	K hours	
Case Material		Aluminum Alloy				
Weight	Without heatsink	--	28	--	g	
	With heatsink	--	36	--		

ENVIRONMENTAL SPECIFICATIONS


Item	Test Conditions	Min.	Typ.	Max.	Unit
Storage Humidity	Non condensing	5	--	95	%
Operating Temperature	See Temperature Derating Curve	-40	--	85	°C
Storage Temperature		-55	--	125	
The Max. Case Temperature	Operating Temperature curve range	--	--	105	
Lead Temperature	1.5mm from case for 10 seconds	--	--	300	
Cooling		Free air convection			
Shake		10-55Hz, 10G, 30 Min. along X, Y and Z			

EMC SPECIFICATIONS

EMI	CE	CISPR22/EN55022 CLASS A (Without External Circuit) / CLASS B (External Circuit Refer to Figure1-②)
	RE	CISPR22/EN55022 CLASS A (Without External Circuit) / CLASS B (External Circuit Refer to Figure1-②)

EMS	ESD	IEC/EN61000-4-2	Contact ±4KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV	perf. Criteria B (External Circuit Refer to Figure1-①)
	Surge	IEC/EN61000-4-5	±2KV	perf. Criteria B (External Circuit Refer to Figure1-①)
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A
	Voltage dips、short and interruptions immunity	IEC/EN61000-4-29	0%-70%	perf. Criteria B

EMC RECOMMENDED CIRCUIT

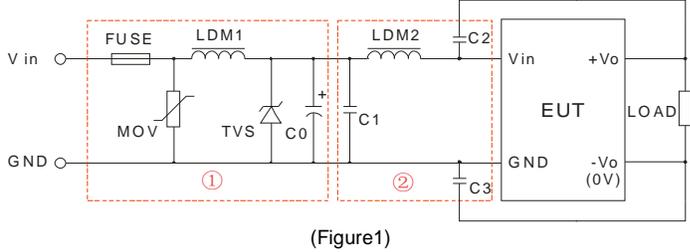


(Figure1)

Recommended external circuit parameters:

Model	Vin:24V	Vin:48V
FUSE	Choose according to practical input current	
MOV	10D560	10D101
LDM1	56μH	
TVS	SMCJ48A	SMCJ90A
C0	120μF/50V	120μF/100V
C1	1μF /50V	1μF /100V
LDM2	4.7μH	
C2、C3	1nF /2KV	





Note: In Figure 1,part①is EMS Recommended external circuit, part②is EMI recommended external circuit. Choose according to requirements.











EMC RECOMMENDED CIRCUIT PCB LAYOUT


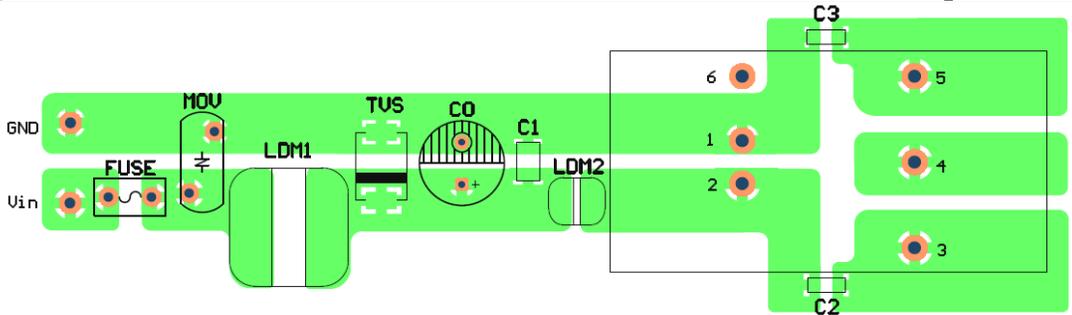


(Figure 2)









EMC TEST WAVEFORM(CLAS B APPLY CIRCUIT)

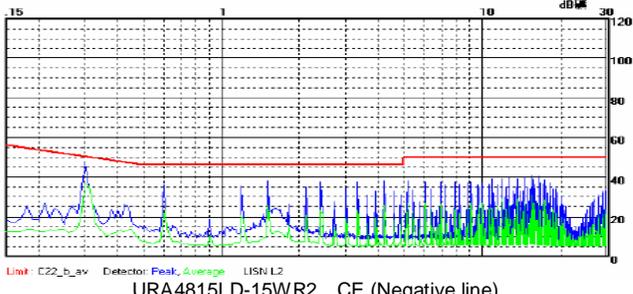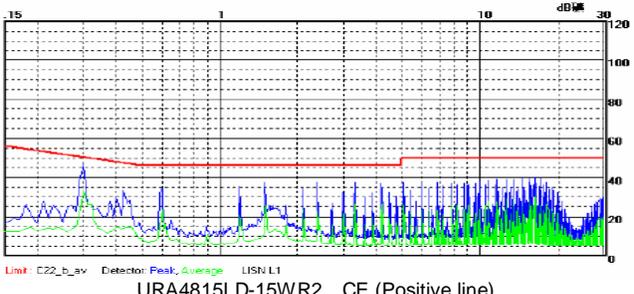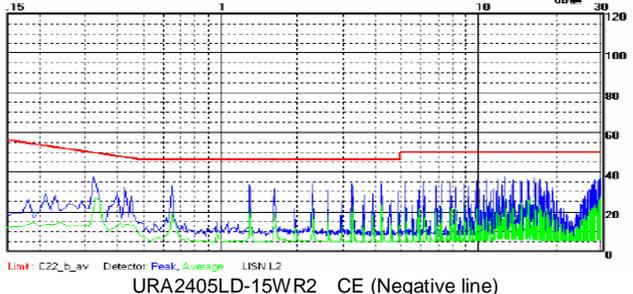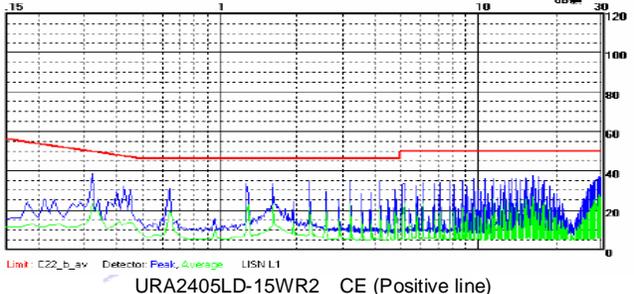

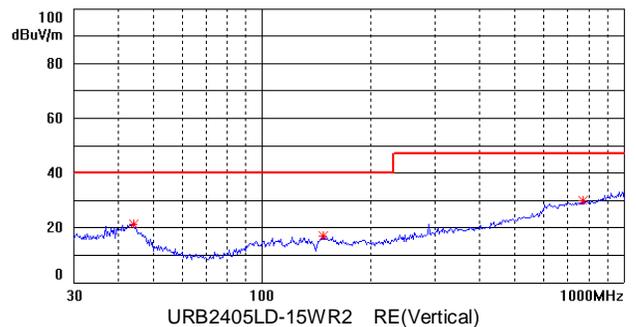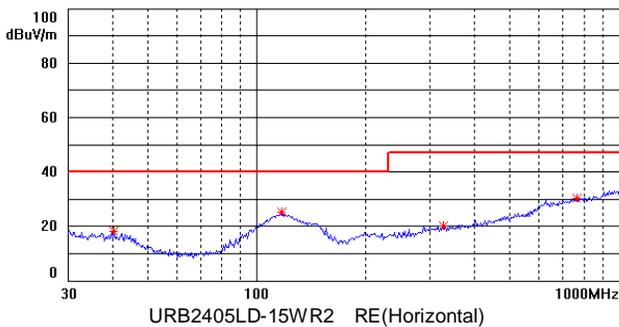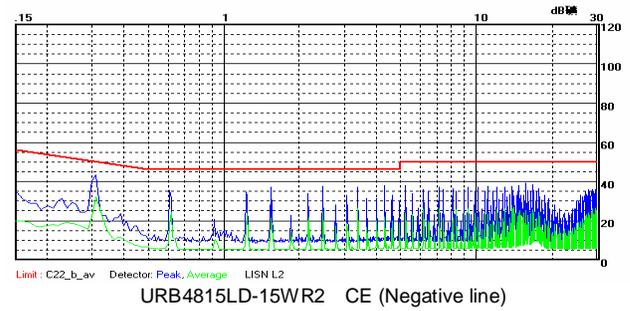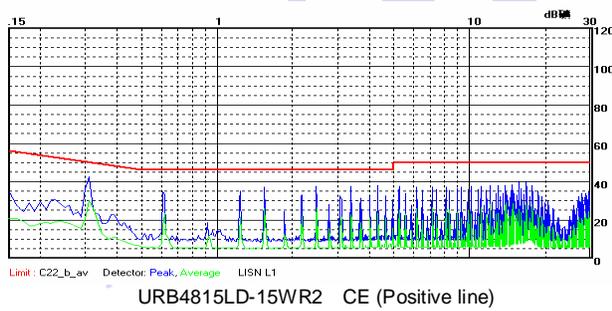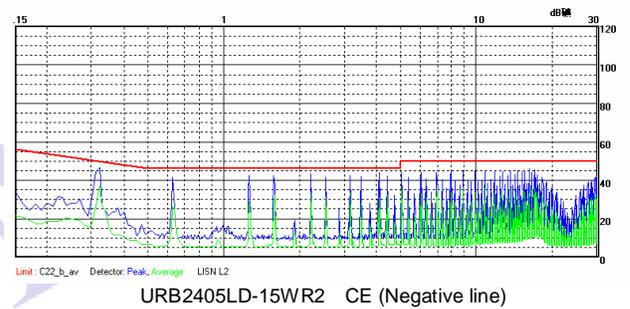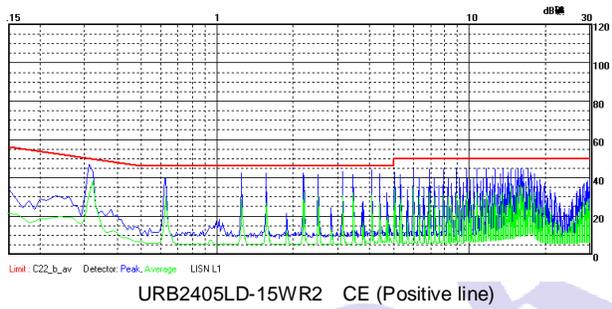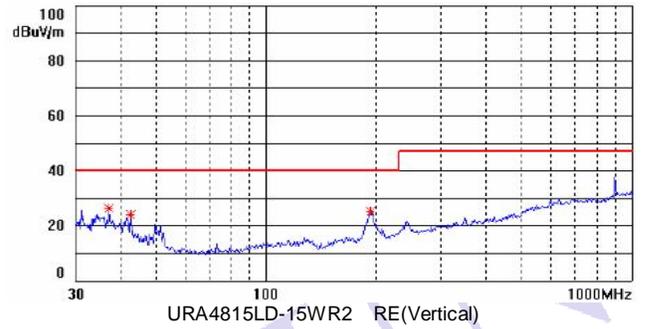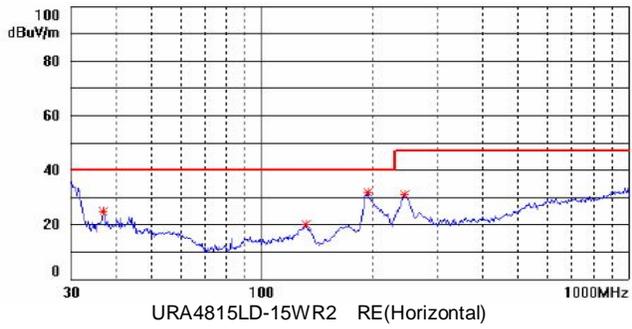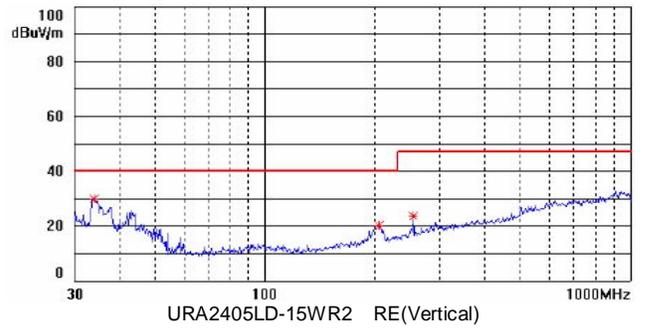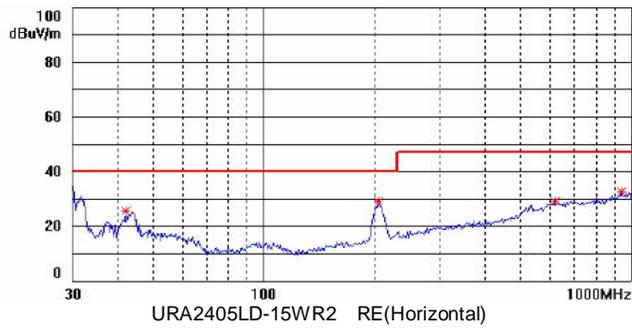


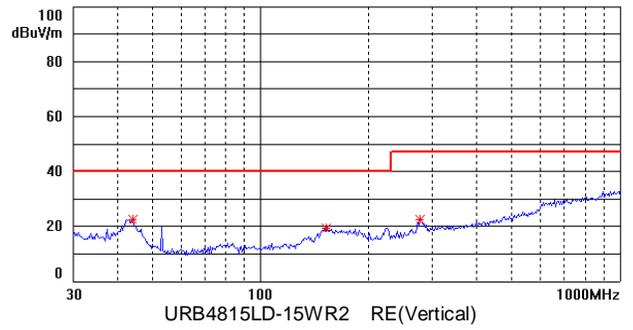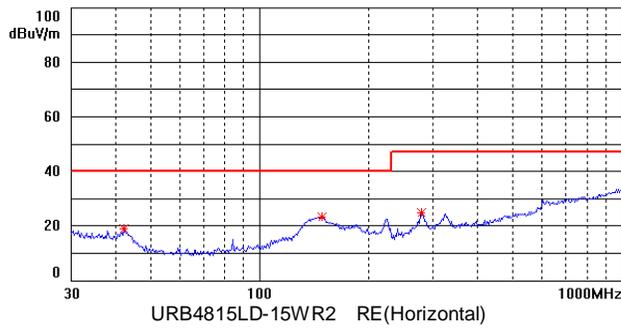


PRODUCT TYPICAL CURVE

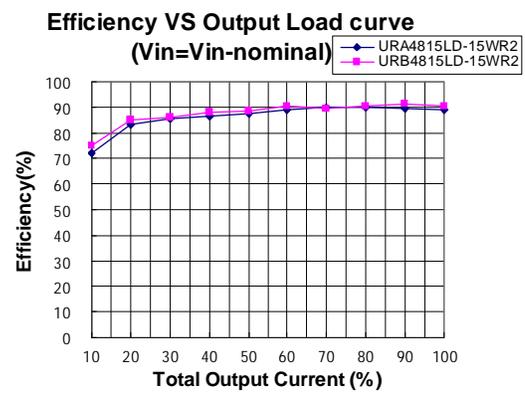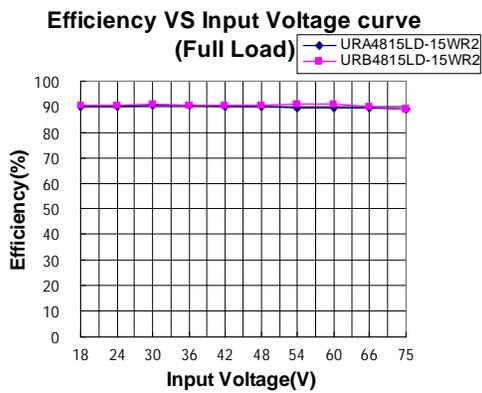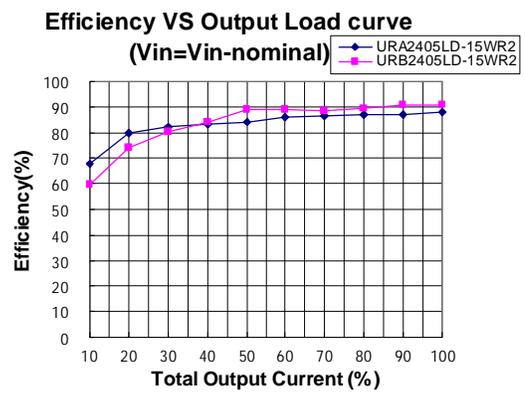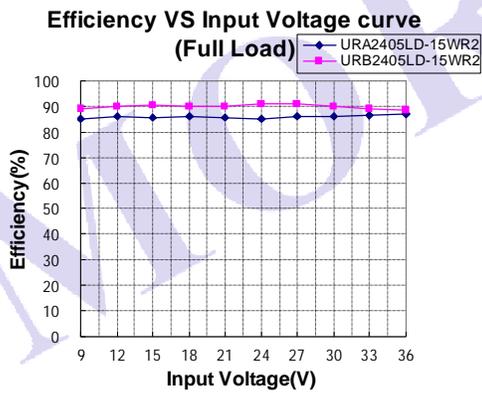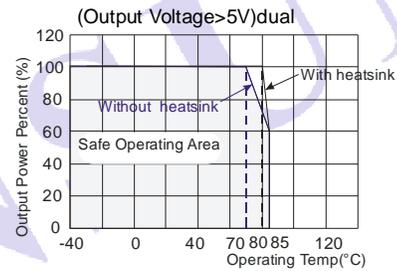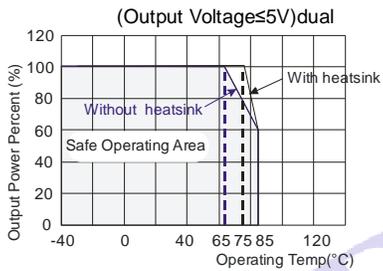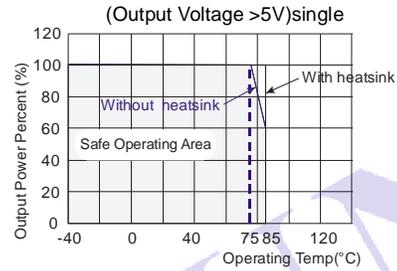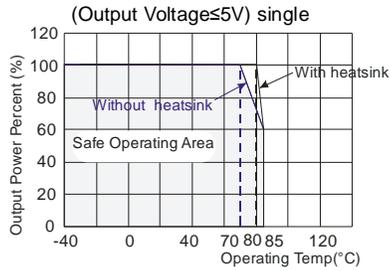


OUTLINE DIMENSIONS, RECOMMENDED FOOTPRINT & PACKAGING

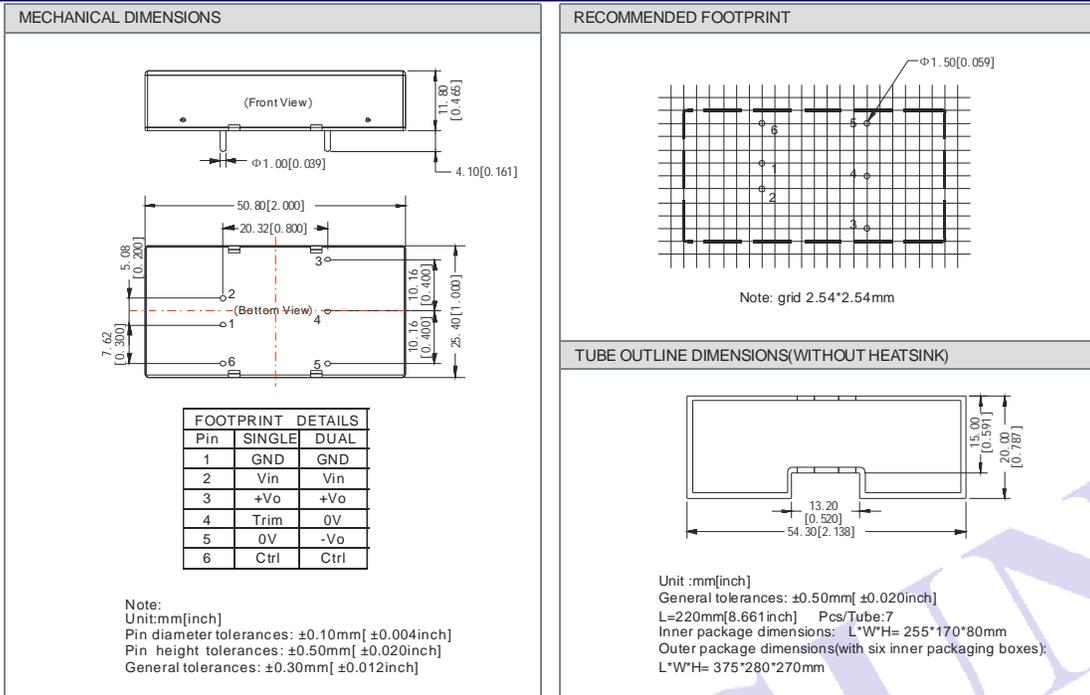

HEATSINK ASSEMBLY

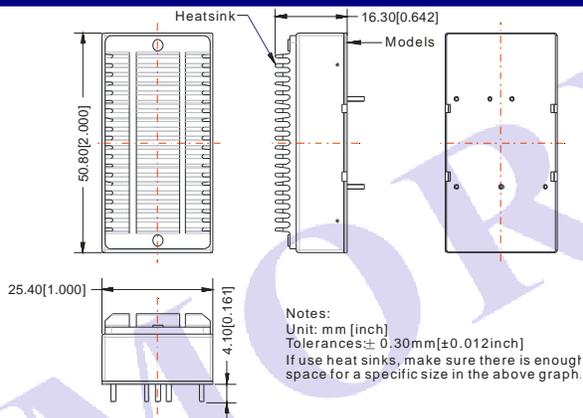


TUBE OUTLINE DIMENSIONS (WITH HEATSINK)

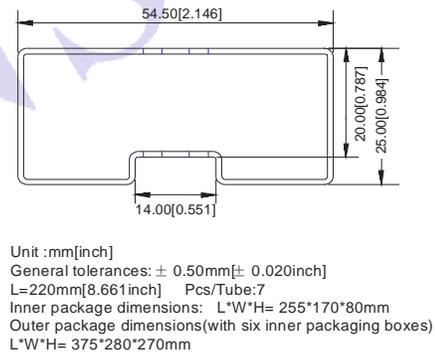

TEST CONFIGURATIONS


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} and Capacitor C_{in} to simulate source impedance.

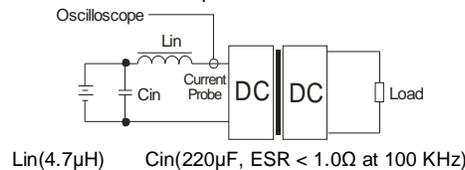

TRIM APPLICATION & TRIM RESISTANCE

Application circuit for TRIM (Part in broken line is the interior of models)

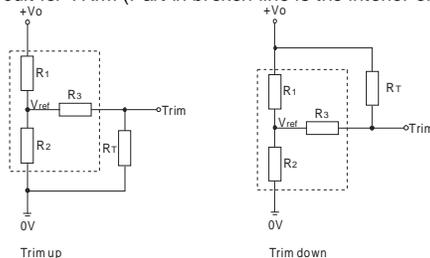

Formula for resistance of TRIM

$$\text{up: } R_T = \frac{aR_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_o' - V_{ref}} \cdot R_1$$

$$\text{down: } R_T = \frac{aR_1}{R_1 - a} - R_3 \quad a = \frac{V_o' - V_{ref}}{V_{ref}} \cdot R_2$$

Note: Leave open if not used. Value for R_1 , R_2 , R_3 , and V_{ref} refer to the above table 1. R_T : Resistance of Trim. a : User-defined parameter, no actual meanings. V_o' : The trim up/down voltage.


(Table 1)

Parameter \ Vo	3.3(VDC)	5(VDC)	12(VDC)	15(VDC)	24 (VDC)
R1(K Ω)	4.801	2.883	10.971	14.497	24.872
R2(K Ω)	2.863	2.864	2.864	2.864	2.863
R3(K Ω)	15	10	17.8	17.8	20
Vref(V)	1.24	2.5	2.5	2.5	2.5

RECOMMENDED CIRCUIT

If you want to further decrease the input surge voltage and the output ripple etc, an capacitor filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 3).

It should also be noted that the capacitance of filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the recommended capacitance of its filter capacitor sees (Table 2).

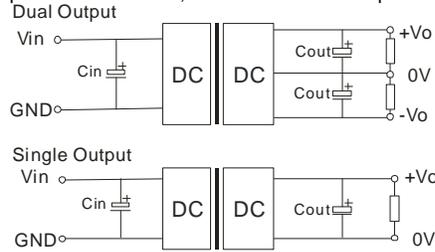

(Figure 3)

EXTERNAL CAPACITOR TABLE (Table 2)

Single Vout (VDC)	Cout (μ F)	Cin (μ F)	Dual Vout (VDC)	Cout# (μ F)	Cin (μ F)
3.3/5	470	100	± 5	220	100
12/15	220		$\pm 12/\pm 15$	100	
24	100		--	--	

Note: # For each output.

Cannot use in parallel and hot swap

Note:

- Input voltage can't exceed this value, or will cause the permanent damage.
- Min. load shouldn't be less than 5%, otherwise ripple maybe increase dramatically. Operation under minimum load will not damage the converter, however, they may not meet all specification listed.
- Max. Capacitive Load tested at nominal input voltage and constant resistive load .
- All specifications measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- In this datasheet, all the test methods of indications are based on our corporate standards.
- All characteristics are for listed model, non-standard models may perform differently, please contact our technical person for more detail.
- Contact us for your specific requirement.
- Specifications subject to change without prior notice.

MORNSUN Science & Technology Co.,Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Luogang district, Guangzhou,P.R.China.

Tel: 86-20-28203030

Fax:86-20-38601272

[Http://www.mornsun-power.com](http://www.mornsun-power.com)