


IGBT MODULE (N series)


■ Features

- Including Brake Chopper
- Square RBSOA
- Low Saturation Voltage
- Overcurrent Limiting Function
(4 ~ 5 Times Rated Current)

■ Equivalent Circuit

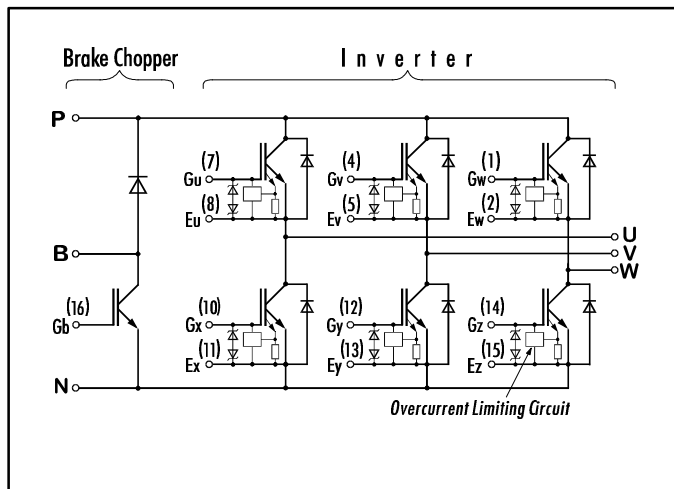

■ Outline Drawing

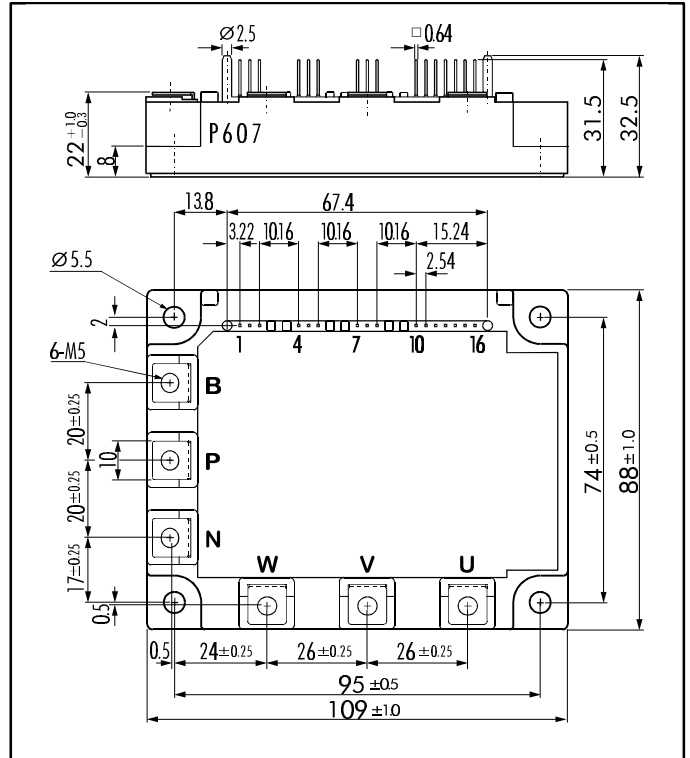

■ Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Items		Symbols	Test Conditions	Ratings	Units
Inverter	Collector-Emitter Voltage	V_{CES}		1200	V
	Gate -Emitter Voltage	V_{GES}		± 20	
	Collector Current	I_C	Continuous	50	A
		$I_{C\ PULSE}$	1ms	100	
	Collector Power Dissipation	P_C	1 device	400	W
Brake Chopper	Collector-Emitter Voltage	V_{CES}		1200	V
	Gate -Emitter Voltage	V_{CES}		± 20	
	Collector Current	I_C	Continuous	25	A
		$I_{C\ PULSE}$	1ms	50	
	Collector Power Dissipation	P_C	1 device	200	W
	Repetitive Peak Reverse Voltage	V_{RRM}		1200	V
	Average Forward Current	$I_{F(AV)}$		1	A
Surge Current	I_{FSM}	10ms	50		
Operating Junction Temperature	T_j		+150	°C	
Storage Temperature	T_{Stg}		-40 ~ +125		
Isolation Voltage	V_{ISO}	A.C. 1min.	2500	V	
Mounting Screw Torque *1			3.5	Nm	
Terminal Screw Torque *1			3.5		

Note: *1:Recommendable Value; 2.5 ~ 3.5 Nm (M5)


■ Electrical Characteristics ($T_j=25^\circ\text{C}$)

Items		Symbols	Test Conditions	Min.	Max.	Units	
Inverter	IGBT	Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=1200V$		3.0	mA
		Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$		15	μA
		Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=20V$ $I_C=50\text{mA}$	4.5	7.5	V
		Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=50A$		3.3	V
		Input capacitance	C_{ies}	$f=1\text{MHz}$, $V_{GE}=0V$, $V_{CE}=10V$	8000 (typ.)		pF
	Turn-on Time	t_{on}	$V_{CC}=600V$ $I_C = 50A$		1.2	μs	
		Turn-off Time	t_{off}	$V_{GE}=\pm 15V$	1.5		
			t_f	$R_G = 24\Omega$	0.5		
	FWD	Diode Forward On-Voltage	V_F	$I_F=50A$ $V_{GE}=0V$		3.0	V
		Reverse Recovery Time	t_{rr}	$I_F=50A$; $V_{GE}=-10V$; $\frac{dI}{dt}=150 \frac{A}{\mu\text{s}}$		350	ns
Brake Chopper	IGBT	Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=1200V$		1.0	mA
		Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$		100	nA
		Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=25A$		3.3	V
		Turn-on Time	t_{on}	$V_{CC}=600V$ $I_C = 25A$		1.2	μs
			Turn-off Time	t_{off}	$V_{GE}=\pm 15V$	1.5	
	t_f	$R_G = 51\Omega$		0.5			
	FWD	Reverse Current	I_{RRM}	$V_R=1200V$		1.0	mA
	Reverse Recovery Time	t_{rr}			600	ns	


■ Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Max.	Units
Thermal Resistance (1 device)	$R_{th(f-c)}$	Inverter IGBT		0.31	$^\circ\text{C/W}$
		Inverter FRD		0.85	
		Brake IGBT		0.63	
Contact Thermal Resistance	$R_{th(c-f)}$	With Thermal Compound	0.05 (typ.)		


Collector current vs. Collector-Emittor voltage
 $T_j=25^{\circ}\text{C}$

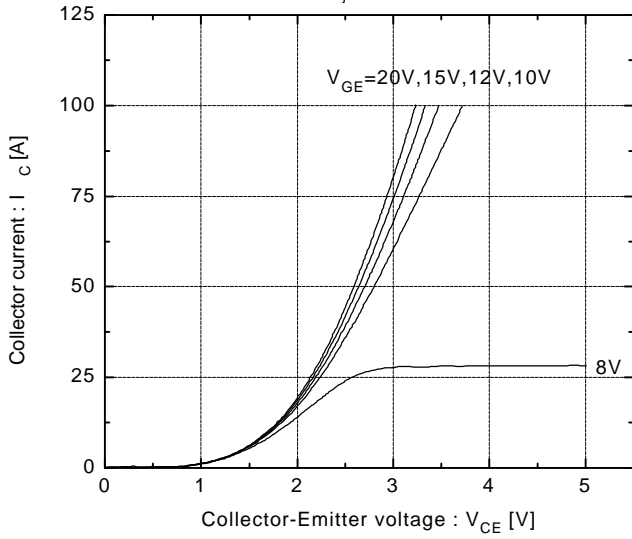


Collector current vs. Collector-Emittor voltage
 $T_j=125^{\circ}\text{C}$

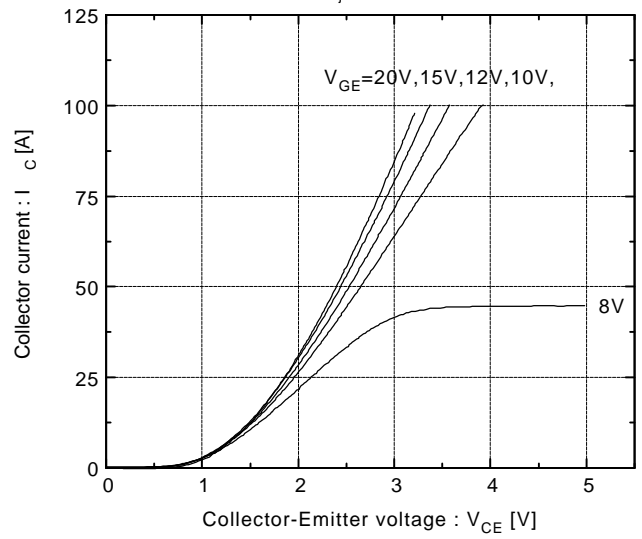


Collector-Emittor vs. Gate-Emittor voltage
 $T_j=25^{\circ}\text{C}$

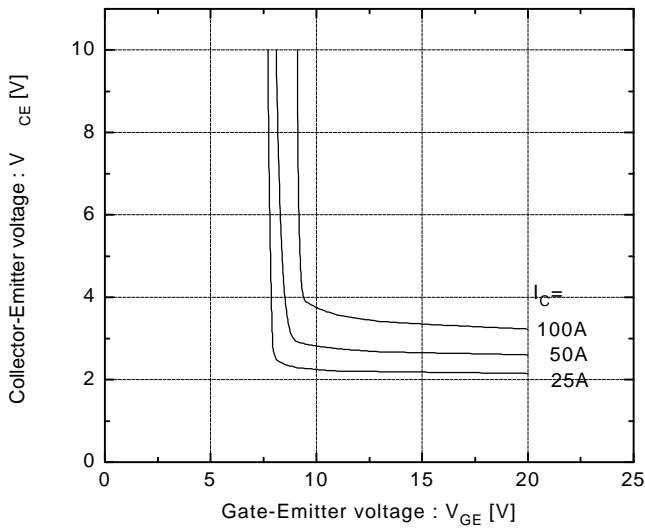


Collector-Emittor vs. Gate-Emittor voltage
 $T_j=125^{\circ}\text{C}$

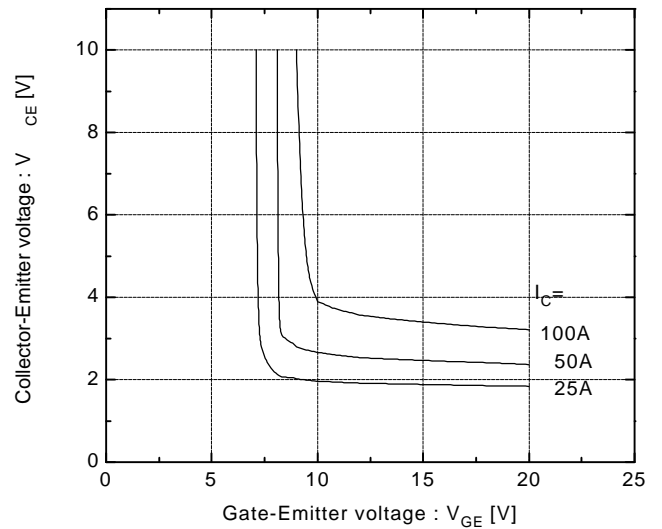

Switching time vs. Collector current
 $V_{CC}=600\text{V}, R_G=24\Omega, V_{GE}=\pm 15\text{V}, T_j=25^{\circ}\text{C}$

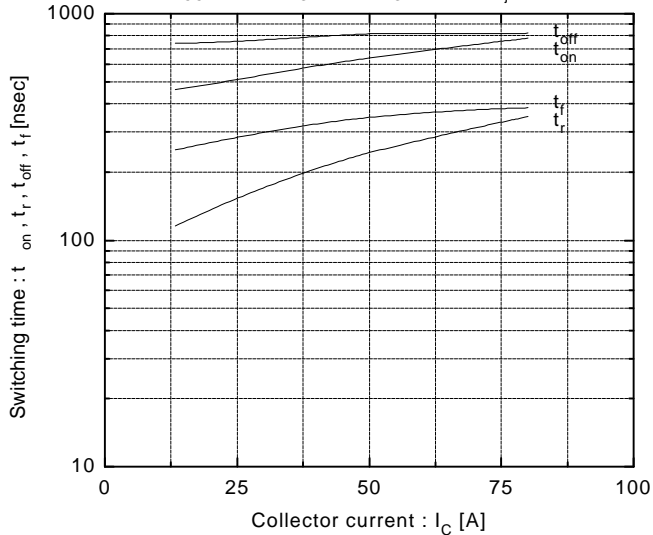


Switching time vs. Collector current
 $V_{CC}=600\text{V}, R_G=24\Omega, V_{GE}=\pm 15\text{V}, T_j=125^{\circ}\text{C}$

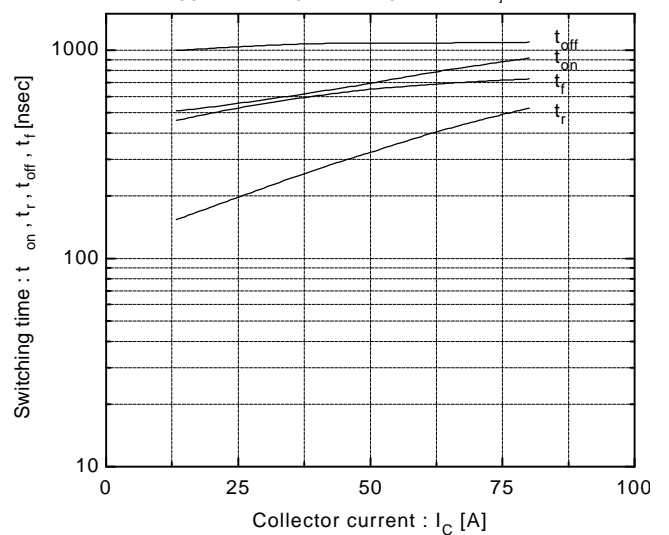


Switching time vs. R_G

$V_{CC}=600V, I_C=50A, V_{GE}=\pm 15V, T_j=25^\circ C$

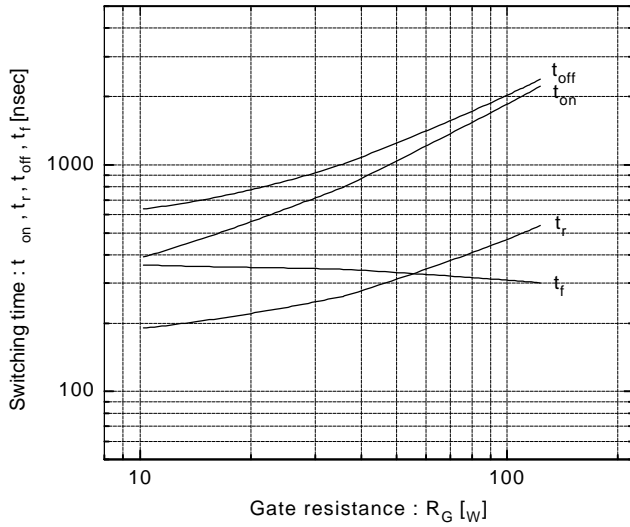


Dynamic input characteristics

$T_j=25^\circ C$

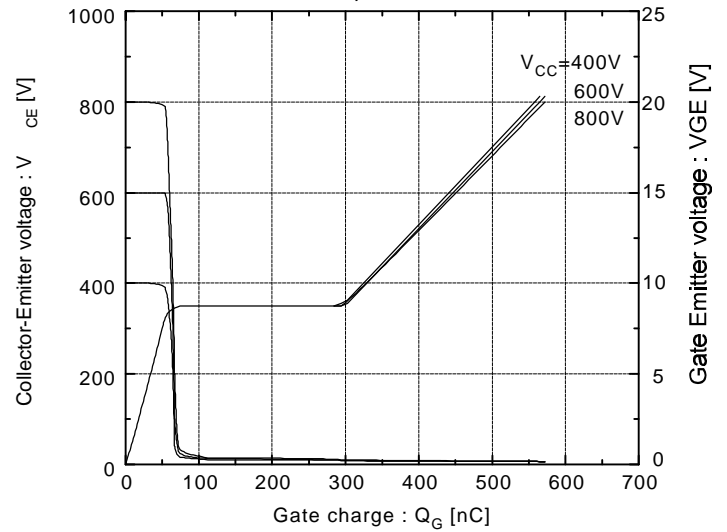


Forward current vs. Forward voltage

$V_{GE}=0V$

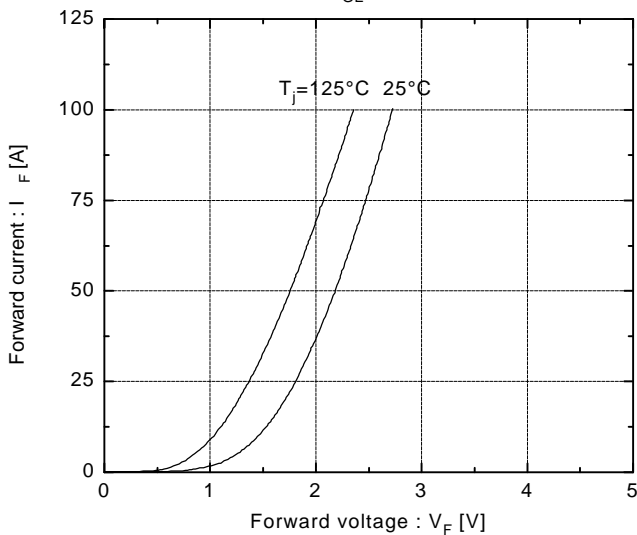


Reverse recovery characteristics

t_{rr}, I_{rr} vs. I_F

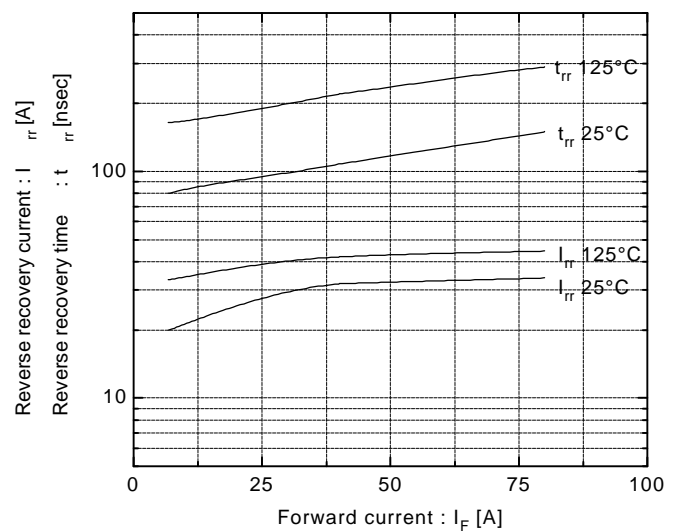


Transient thermal resistance

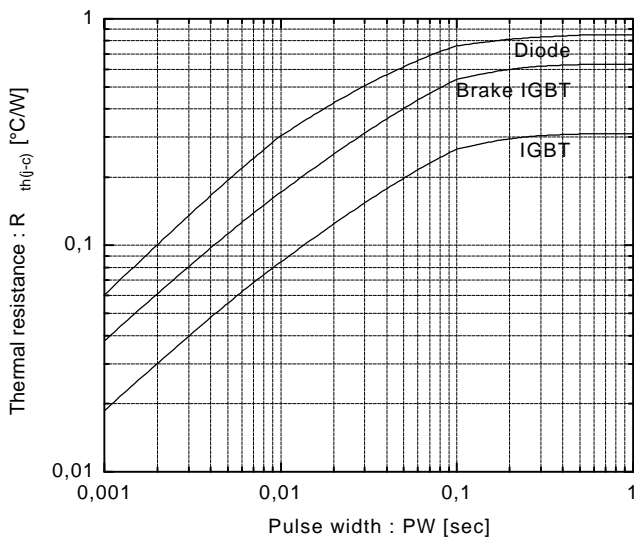


Reversed biased safe operating area

$+V_{GE}=15V, -V_{GE}\leq 15V, T_j\leq 125^\circ C, R_G\geq 24\Omega$

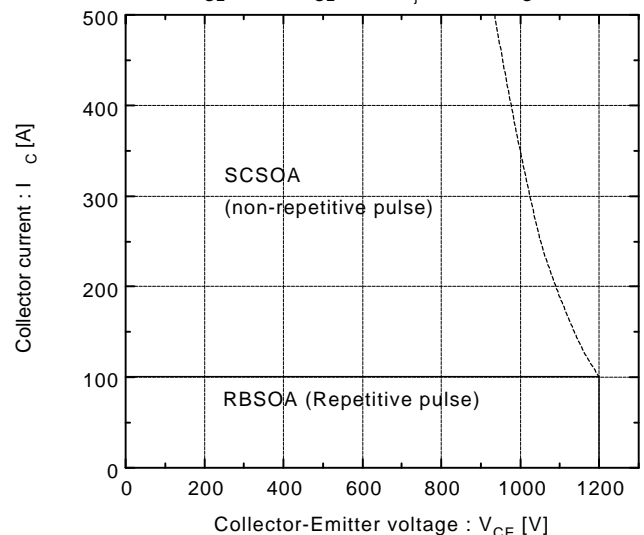


Switching loss vs. Collector current

$V_{CC}=600V, R_G=24\Omega, V_{GE}=\pm 15V$

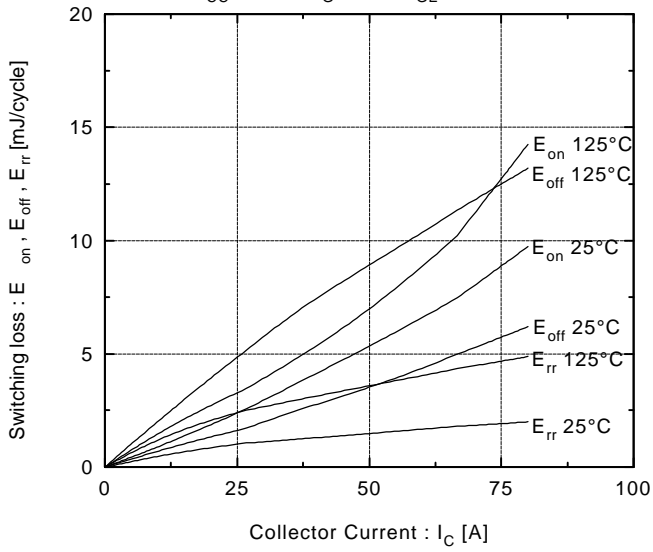


Capacitance vs. Collector-Emitter voltage

$T_j=25^\circ C$

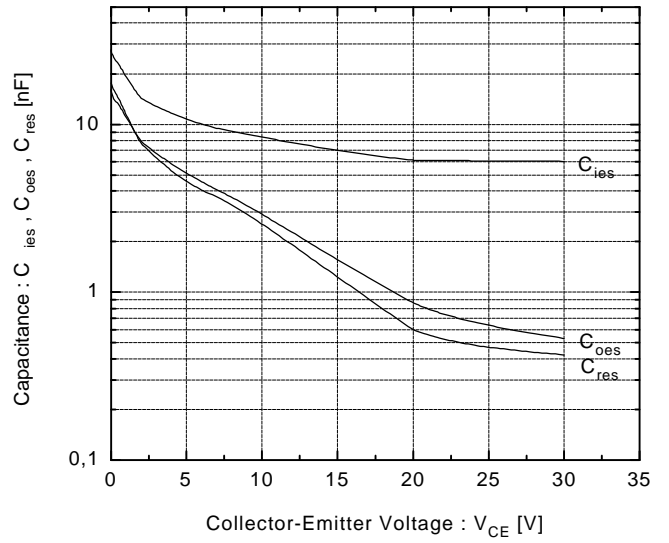


Brake Chopper IGBT


Collector current vs. Collector-Emitter voltage
 $T_j=25^\circ\text{C}$

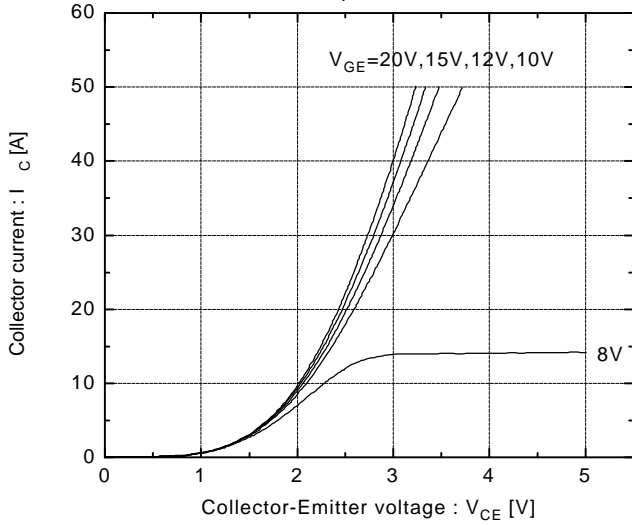


Collector current vs. Collector-Emitter voltage
 $T_j=125^\circ\text{C}$

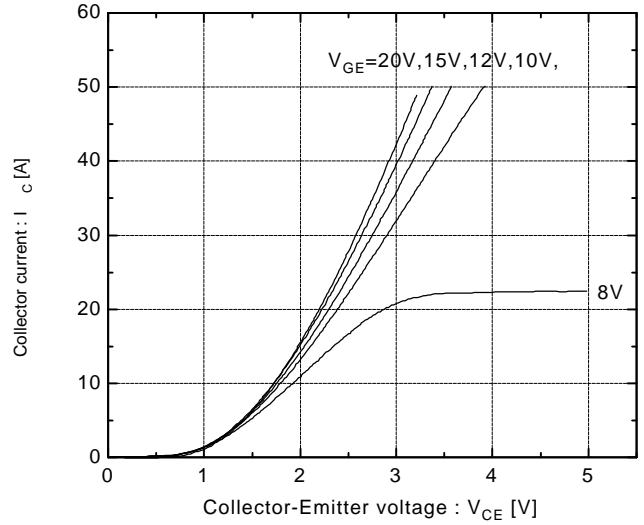


Collector-Emitter vs. Gate-Emitter voltage
 $T_j=25^\circ\text{C}$

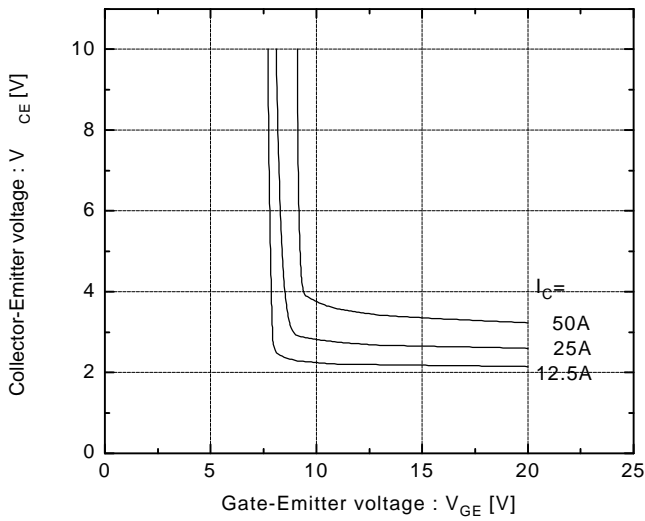


Collector-Emitter vs. Gate-Emitter voltage
 $T_j=125^\circ\text{C}$

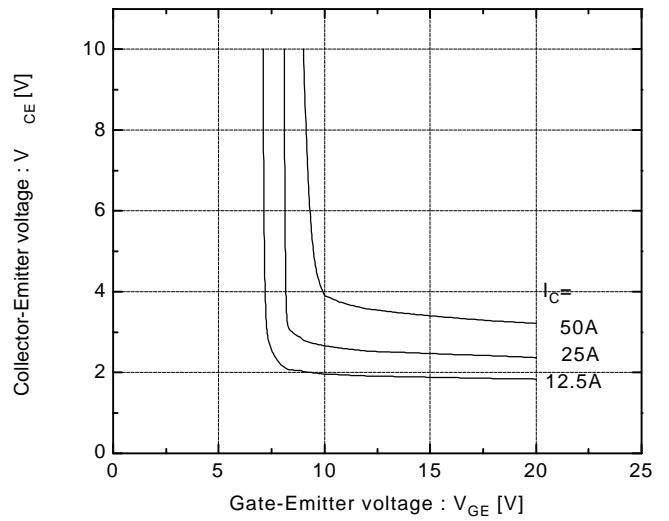

Switching time vs. Collector current
 $V_{CC}=600\text{V}, R_G=51\Omega, V_{GE}=\pm 15\text{V}, T_j=25^\circ\text{C}$

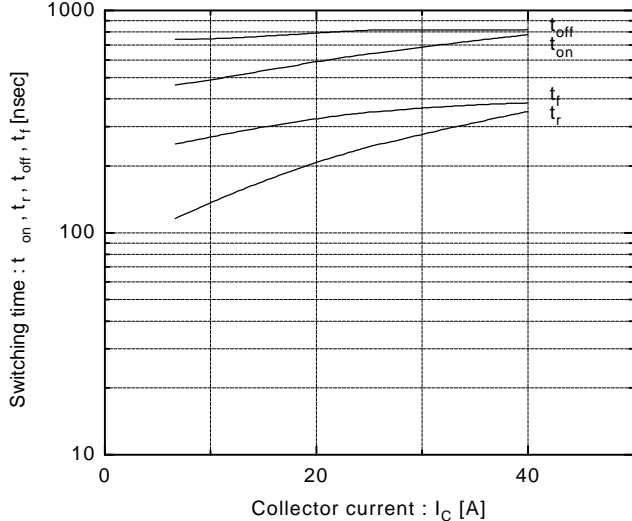


Switching time vs. Collector current
 $V_{CC}=600\text{V}, R_G=51\Omega, V_{GE}=\pm 15\text{V}, T_j=125^\circ\text{C}$

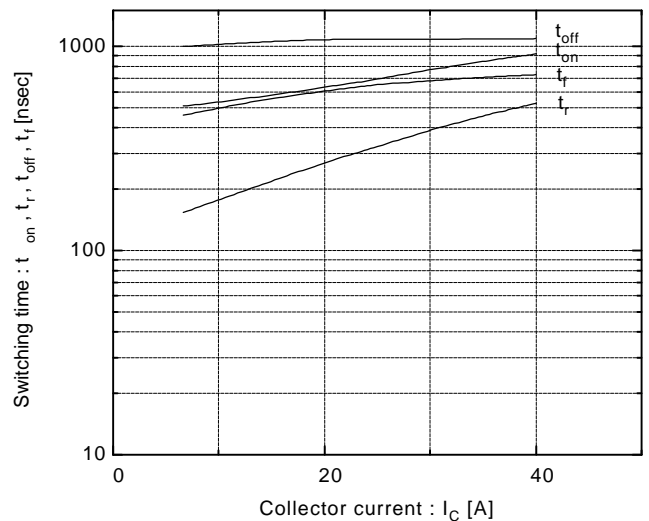

Brake Chopper IGBT


Switching time vs. R_G

$V_{CC}=600V, I_C=25A, V_{GE}=\pm 15V, T_j=25^\circ C$

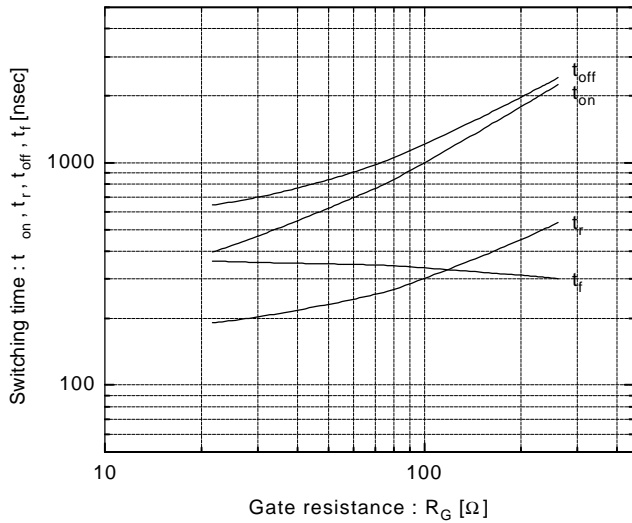


Dynamic input characteristics

$T_j=25^\circ C$

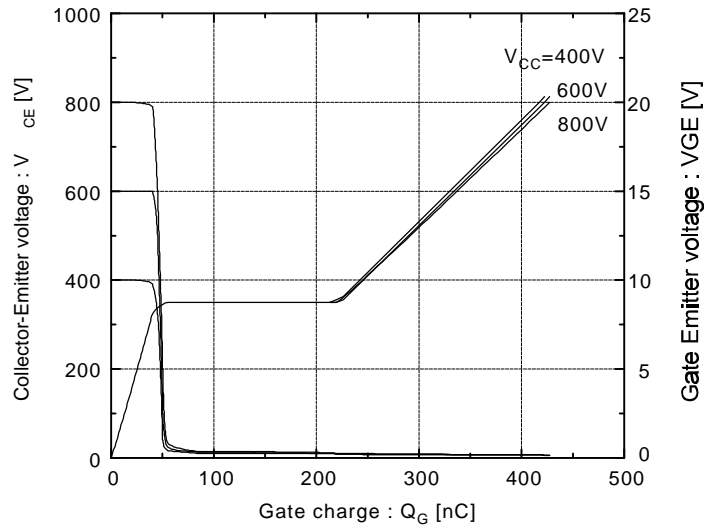


Reversed biased safe operating area

$+V_{GE}=15V, -V_{GE}\leq 15V, T_j\leq 125^\circ C, R_G\geq 51\Omega$

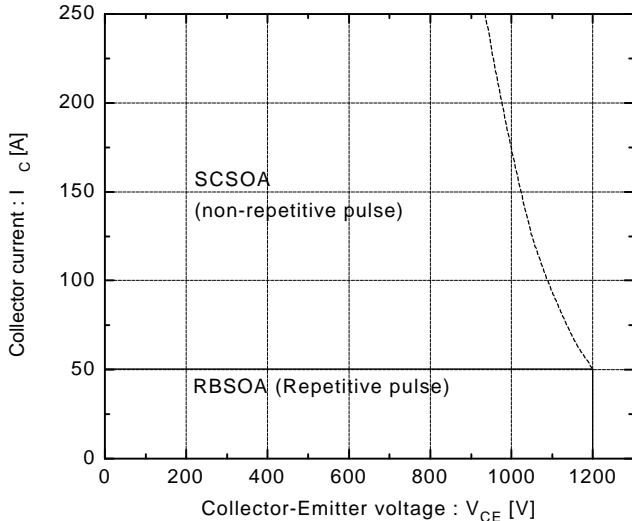


Switching loss vs. Collector current

$V_{CC}=600V, R_G=51\Omega, V_{GE}=\pm 15V$

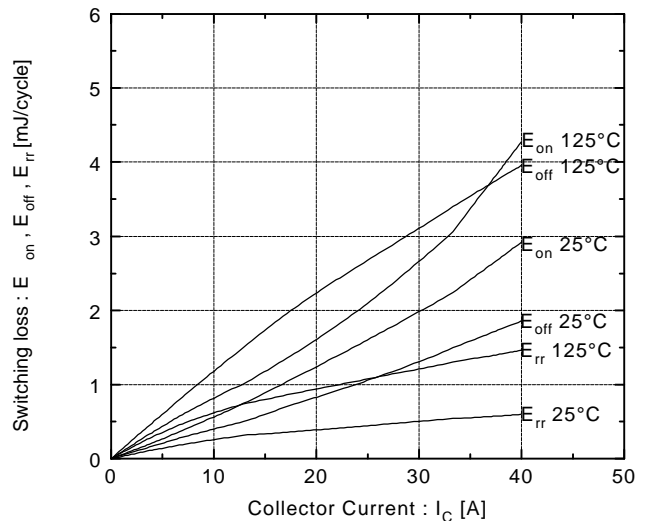

Capacitance vs. Collector-Emitter voltage

$T_j=25^\circ C$

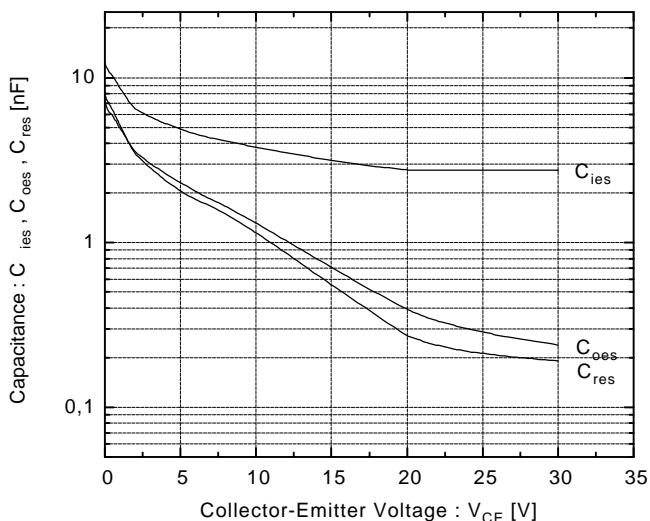

Fuji Electric GmbH

Lyoner Straße 26

D-60528 Frankfurt/M

Tel.: 069 - 66 90 29 - 0

Fax.: 069 - 66 90 29 - 56

Fuji Electric (UK) Ltd.

Commonwealth House
2 Chalkhill Road Hammersmith

London W6 8DW, UK

Tel.: 0181 - 233 11 30

Fax.: 0181 - 233 11 60