

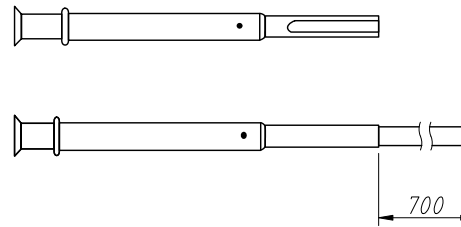
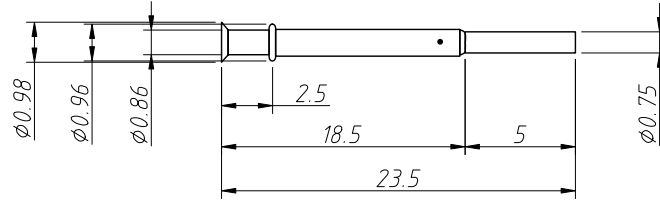


1
RoHS Compliance

2
Needle Bar

3
4
5
6
7
8
Bushing

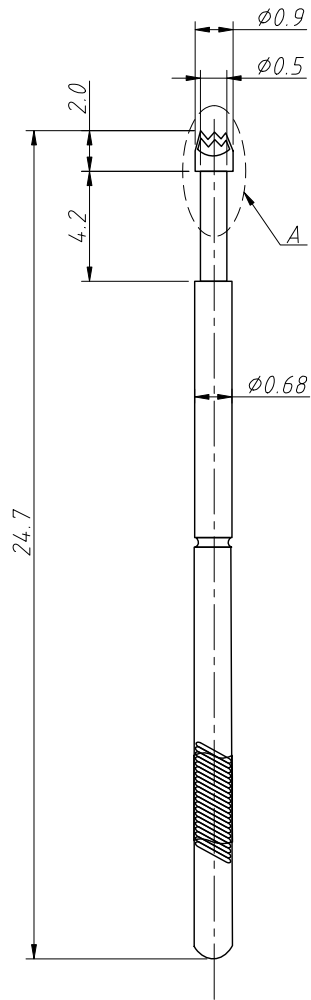

Notes:

1.Material:

Needle Bar:Rhodium Or Gold Plating After
Heat Treatment Of Imported SK4
Needle Tubing:Phosphor Bronze,Gold Plated
Bushing:Phosphor Bronze,Gold Plated
Spring:Stainless Steel

2.Electric:

Drill Size:0.9mm
Rated Current:3A
Contact Resistance:50mΩ
Compaction elasticity:120g
Max Travel:4.2mm

ANGLE TOLERANCE	PROJECTION	Description:	Probe Pin	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-P25-0423-G
x.x ±0.30	SHEET SIZE	A4	XX	
x.xx ±0.20	Draw:	Daniel	2023-07-05	
x.xxx ±0.10	Check:	Daniel	2023-07-05	

NingBo KLS ELECTRONIC CO.,L TD.