



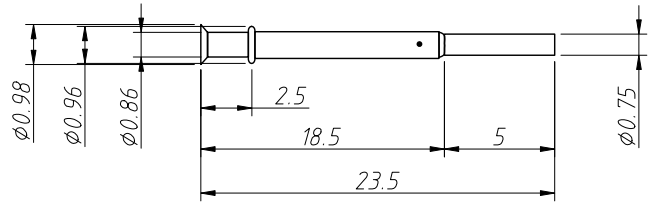


1
RoHS Compliance

Needle Bar

Bushing

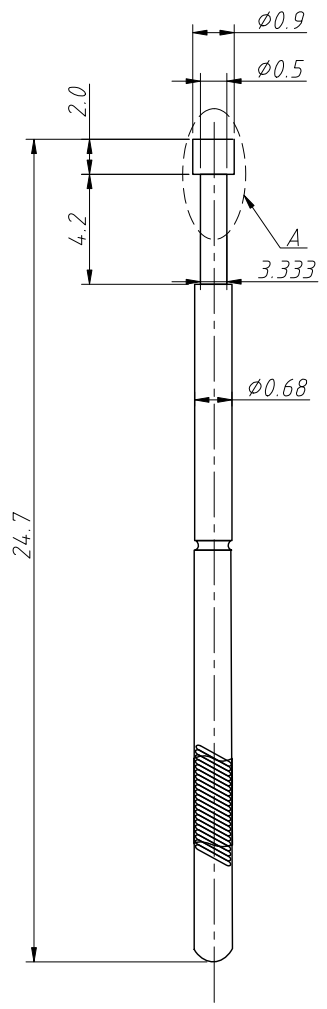

Detail A
2:1

Notes:

1.Material:

- Needle Bar:Rhodium Or Gold Plating After Heat Treatment Of Imported SK4
- Needle Tubing:Phosphor Bronze,Gold Plated
- Bushing:Phosphor Bronze,Gold Plated
- Spring:Stainless Steel

2.Electric:

- Drill Size:φ0.9mm
- Rated Current:3A
- Contact Resistance:50mΩ
- Compaction elasticity:120g
- Max Travel:4.2mm

ANGLE TOLERANCE	PROJECTION	Description:	Probe Pin	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-P25-1223-G
x.x ±0.30	SHEET SIZE	A4	XX	NingBo KLS ELECTRONIC CO.,L TD.
x.xx ±0.20	Draw:	Daniel	2023-07-05	
x.xxx ±0.10	Check:	Daniel	2023-07-05	