

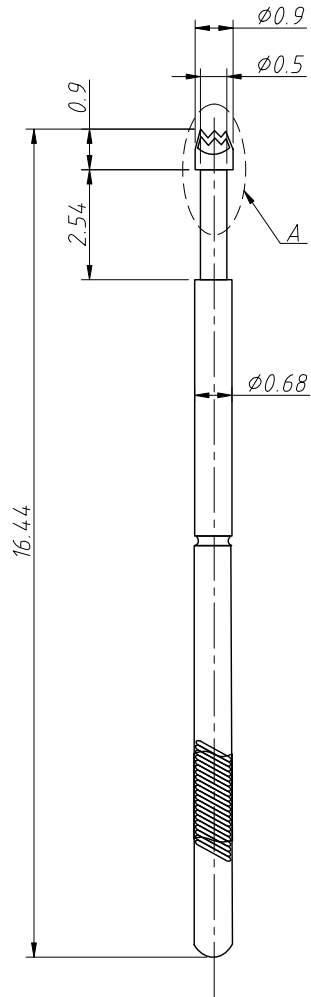



1  
RoHS Compliance

Needle Bar






Bushing

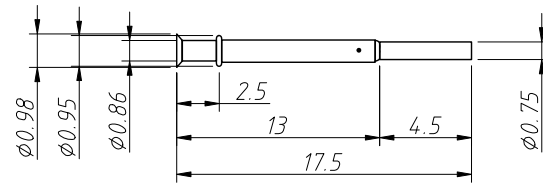

Weld line

700

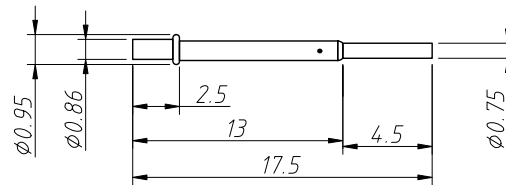

Winding wire

700


Notes:

1.Material:

Needle Bar:Imported Copper Plating Or  
Rhodium Or Gold Plating After  
Heat Treatment Of Imported SK4  
Needle Tubing:Phosphor Bronze,Gold Plated  
Bushing:Phosphor Bronze,Gold Plated  
Spring:Stainless Steel

2.Electric:

Drill Size:φ0.9mm  
Rated Current:3A  
Rated Resistance:50mΩ  
Compaction Elasticity:120g(75g,30g)  
Max Travel:2.54mm

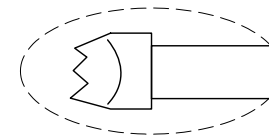

Detail A  
2:1

ANGLE TOLERANCE	PROJECTION	Description:	Probe Pin	
±3°				
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-P19-4021-G
x.x ±0.30	SHEET SIZE	A4	XX	
x.xx ±0.20	Draw:	Daniel	2023-07-05	
x.xxx ±0.10	Check:	Daniel	2023-07-05	

NingBo KLS ELECTRONIC CO.,L TD.