



EXTREME LOW VF SCHOTTKY RECTIFIER

Voltage

20-40 V

Current

2 A

Features

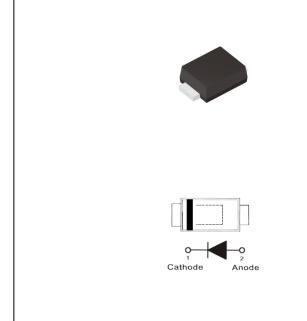
- Ultra low forward voltage drop, low power loss
- Fast switching speed
- Surface mount package
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Applications

- Low voltage rectification
- Reverse polarity protection
- Low power consumption applications

Mechanical Data

- Case: Molded plastic, SOD-123HE
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0006 ounces, 0.0184 grams



SOD-123HE

Maximum Ratings (T_A = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	SBA220AH	SBA230AH	SBA240AH	UNIT	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	V	
Maximum rms voltage	V_{RMS}	14	21	28	V	
Maximum dc blocking voltage	V_R	20	30	40	V	
Maximum average forward rectified current	I _{F(AV)}	2				
Peak forward surge current: 8.3ms single half sine- wave Superimposed on rated load	I _{FSM}	30				
T it is the second of the second	R _{θJC} (1)	20			°C/W	
Typical thermal resistance	$R_{\theta JA}^{~(2)}$	185				
Operating junction temperature range	TJ	-55 to +150				
Storage temperature range	T_{STG}	-55 to +150				

Electrical Characteristics

DADAMETED	SYMBOL TEST CO	MOITION	SBA220AH		SBA230AH		SBA240AH		LIMIT	
PARAMETER		TEST CONDITION		TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	UNIT
Forward voltage	V _F	I _F = 10mA	T _J =25 °C	0.21	-	0.21	-	0.22	-	V
		I _F = 0.5A		0.33	-	0.34	-	0.37	-	
		I _F = 2A		-	0.46	-	0.49	-	0.53	
		I _F = 10mA	T _J =125 °C	0.09	-	0.09	-	0.1	-	V
		I _F = 0.5A		0.24	-	0.26	-	0.27	-	
Reverse current	I _R ⁽³⁾	V _R = 10V	T _J =25°C	14	-	9	-	7.4	-	μА
		V _R = 20V		-	100	25	-	9.6	-	
		$V_{R} = 30V$		-	-	-	100	16	-	
		$V_R = 40V$		-	-	-	-	-	100	
		V _R = 20V	T _J =125 °C	6.1	-	3.7	-	2.3	-	mA
		$V_R = 30V$		-	-	9.6	-	3.5	-	
		$V_R = 40V$		-	-	-	-	5.6	-	

Note: 1. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area.

- 2. Mounted on a FR4 PCB, single-sided copper, mini pad.
- 3. Short duration pulse test used to minimize self-heating effect.





TYPICAL CHARACTERISTIC CURVES

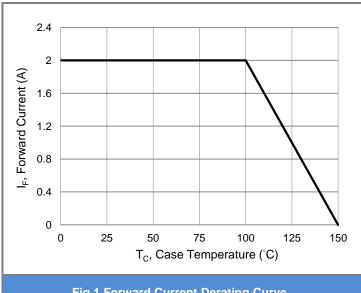


Fig.1 Forward Current Derating Curve





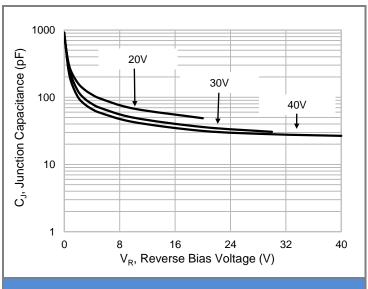


Fig. 2 Typical Junction Capacitance

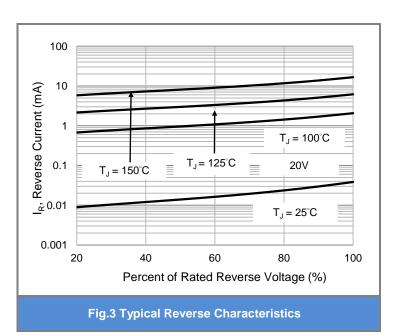

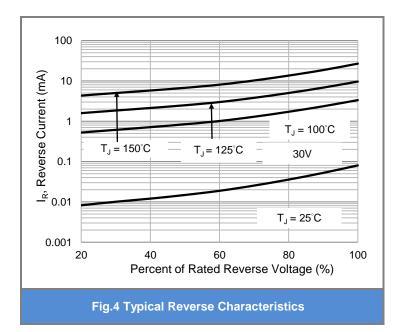


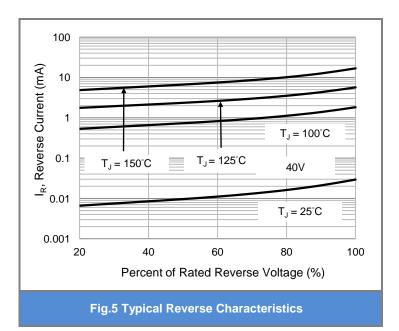


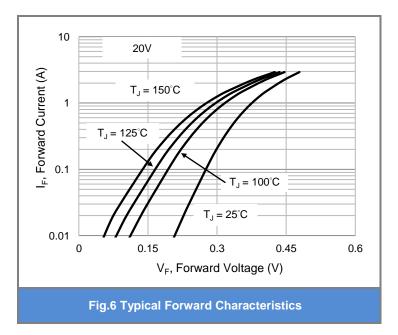





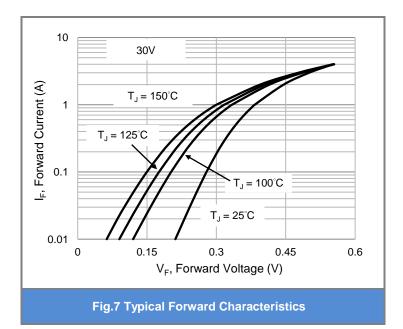

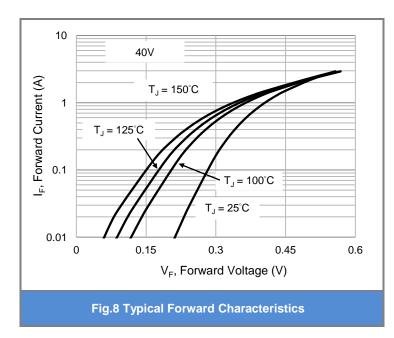

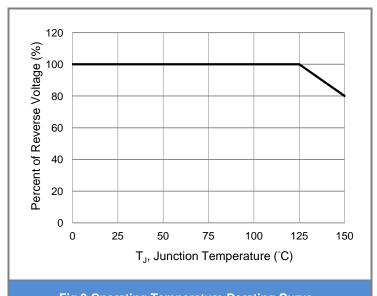


Fig.9 Operating Temperature Derating Curve







Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
SBA220AH_R1_00001	SOD-123HE	3K pcs / 7" reel	В7	Halogen free
SBA230AH_R1_00001	SOD-123HE	3K pcs / 7" reel	E7	Halogen free
SBA240AH_R1_00001	SOD-123HE	3K pcs / 7" reel	F7	Halogen free

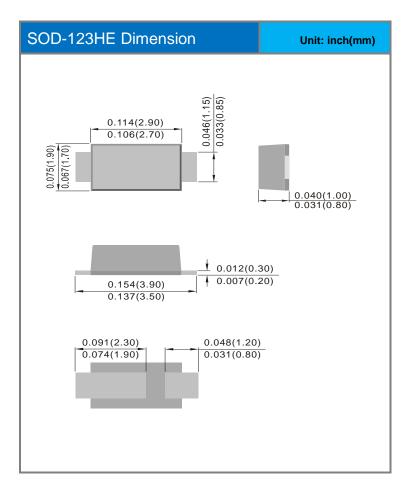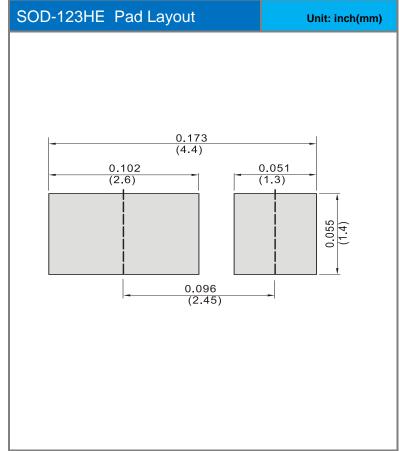Packaging Information & Mounting Pad Layout









Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.