



## **EXTREME LOW VF SCHOTTKY RECTIFIER**

Voltage

20-40 V

Current

5 A

#### **Features**


- Ultra low forward voltage drop, low power loss
- Fast switching speed
- Surface mount package
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

#### **Applications**

- Low voltage rectification
- Reverse polarity protection
- Low power consumption applications

#### **Mechanical Data**

- Case: Molded plastic, SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0012 ounces, 0.0328 grams

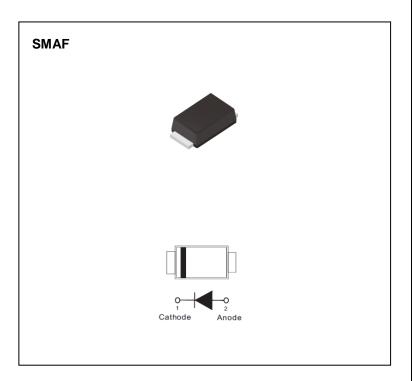

## **Maximum Ratings** (T<sub>A</sub> = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	SBA520AF	SBA530AF	SBA540AF	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	V	
Maximum rms voltage	$V_{RMS}$	14	21	28	V	
Maximum dc blocking voltage	$V_R$	20	30	40	V	
Maximum average forward rectified current	I <sub>F(AV)</sub>	5				
Peak forward surge current: 8.3ms single half sine- wave Superimposed on rated load	I <sub>FSM</sub>	80				
T .:	R <sub>θJC</sub> (2)	15				
Typical thermal resistance	R <sub>0JA</sub> (1)	150				
Operating junction temperature range	T <sub>J</sub>	-55 to +150				
Storage temperature range	T <sub>STG</sub>	-55 to +150				

#### **Electrical Characteristics**

PARAMETER	CVMDC	TEST CONDITION		SBA520AF		SBA530AF		SBA540AF		
	SYMBOL			TYP.	MAX.	TYP.	MAX.	TYP.	MAX.	UNIT
		I <sub>F</sub> = 10mA		0.17	-	0.17	-	0.17	-	
Forward voltage		I <sub>F</sub> = 2A	T <sub>J</sub> =25 °C	0.34	-	0.35	-	0.36	-	V
	$V_{F}$	I <sub>F</sub> = 5A		-	0.45	-	0.46	-	0.49	
		$I_F = 10mA$	T 405.00	0.04	-	0.04	-	0.05	-	
		$I_F = 2A$ $T_J = 125 ^{\circ}C$ 0.25 - 0.27 -	0.29	-	V					
		V <sub>R</sub> = 10V		47	-	33	-	25	-	
Reverse current	I <sub>R</sub> <sup>(3)</sup>	V <sub>R</sub> = 20V	T <sub>J</sub> =25°C	-	300	51	-	32	_	μА
		$V_R = 30V$		-	-	-	300	55	_	
		$V_R = 40V$		-	-	-	-	-	250	
		V <sub>R</sub> = 20V	T <sub>J</sub> =125 °C	21	-	11	-	8	-	mA
		$V_R = 30V$		-	-	19	-	12	-	
		$V_R = 40V$		-	-	-	_	19	_	

Note: 1. Mounted on a FR4 PCB, single-sided copper, mini pad.


- 2. Mounted on a FR4 PCB, single-sided copper, with 100cm² copper pad area
- 3. Short duration pulse test used to minimize self-heating effect.  $\label{eq:continuous}$

March 19,2018-REV.04 Page 1





#### **TYPICAL CHARACTERISTIC CURVES**

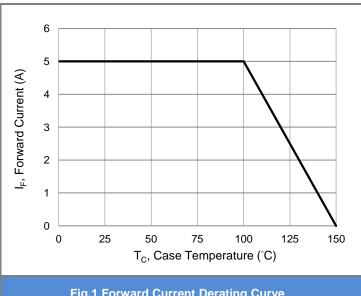

**Fig.1 Forward Current Derating Curve** 

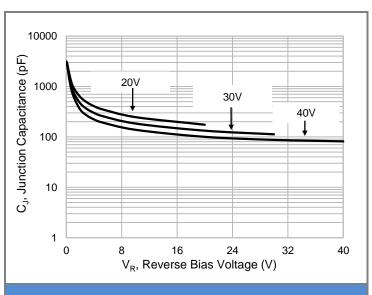


Fig. 2 Typical Junction Capacitance




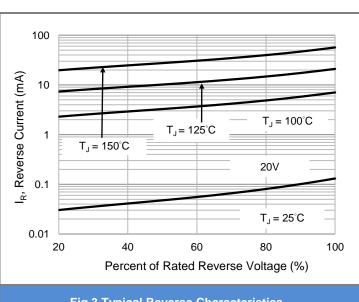


Fig.3 Typical Reverse Characteristics

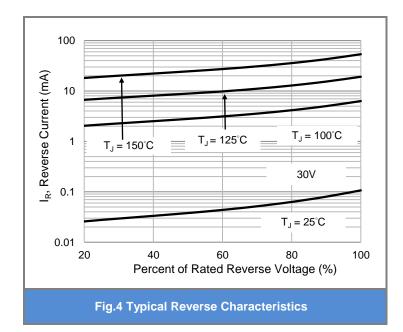

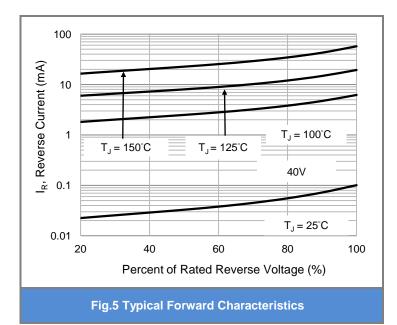


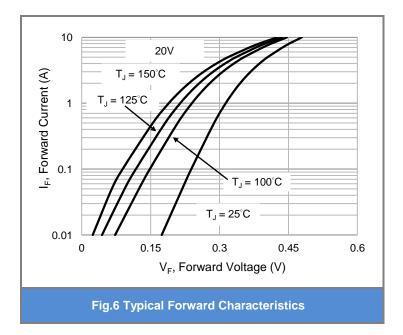



March 19,2018-REV.04 Page 2





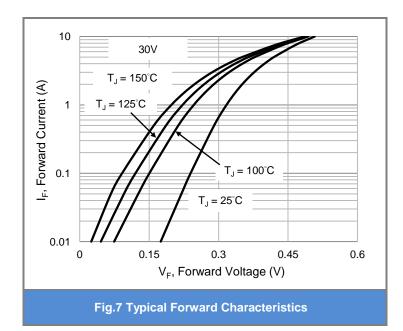

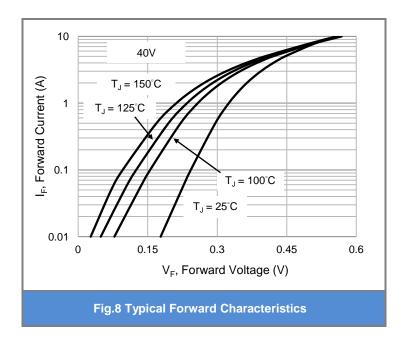

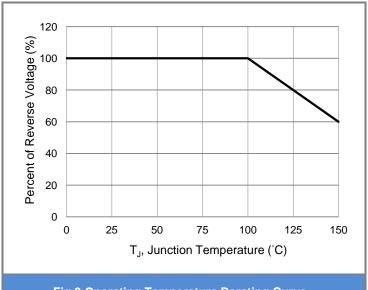

**Fig.9 Operating Temperature Derating Curve** 

March 19,2018-REV.04 Page 3







### **Part No Packing Code Version**

Part No Packing Code	Package Type	Packing Type	Marking	Version
SBA520AF_R1_00001	SMAF	3K pcs / 7" reel	SBA520AF	Halogen free
SBA530AF_R1_00001	SMAF	3K pcs / 7" reel	SBA530AF	Halogen free
SBA540AF_R1_00001	SMAF	3K pcs / 7" reel	SBA540AF	Halogen free

### **Packaging Information & Mounting Pad Layout**

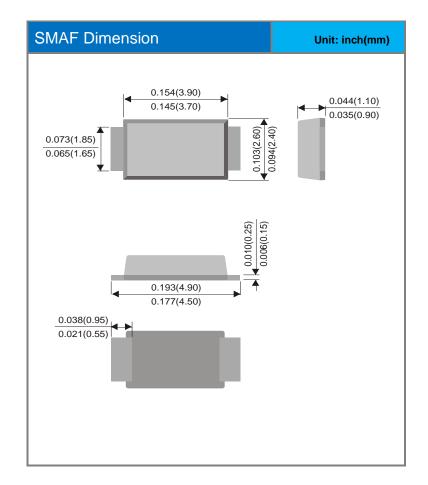

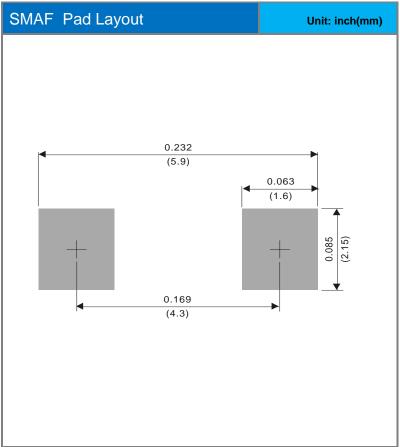

March 19,2018-REV.04 Page 4





#### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.

March 19,2018-REV.04 Page 5