

SEE SHEET 1 FOR REVISIONS

5 TABLE I

Electrical Data	Detail
Impedance	50 Ω
Frequency Range	0 to 18 GHz
Insulation Resistance	5 000 M Ω min.
Voltage Rating	1 000 V RMS
Contact Resistance	Center: $\leq 3.0 \text{ m} \Omega$ Outer: $\leq 2.5 \text{ m} \Omega$
Working Voltage	RG-174, or Equivalent \rightarrow 335 V RMS max.
Dielectric Withstanding Voltage	RG-174, or Equivalent \rightarrow 750 V RMS max.

6 TABLE II


Environmental Data	Detail
Corrosion (Salt spray)	ASTM B-117
Thermal Shock	MIL-STD-202 Method 107 test condition B
Vibration	MIL-STD-202 Method 204 test condition D
Mechanical Shock	MIL-STD-202 Method 213 test condition I
Temperature Range	-55 °C to +155 °C
Environmental Compliance	RoHS

7 TABLE III

Mechanical Data	Detail
Mounting Type	Free Hanging (In-Line)
Fastening Type	1/4"-36 Threaded Coupling
Recommended Torque	0.57 N·m (5.0 in lbs)
Coupling Nut Retention	60 lbs. min.
Connector Durability	500 cycles min.
Weight	3.1 g (0.11 oz)

ASSEMBLY INSTRUCTIONS

- 1. Strip the cable to the recommended dimensions.
- 2. Slip heat shrink and crimp ring onto stripped cable.
- 3. solder the socket to the center-conductor.
- 4. Insert the socket, center-conductor and insulator into the body until the top of the socket is flush with the white insulation in the body.
- 5. Wrap the braid around the tail of the body and crimp the ring with a 0.128" hex crimp tool, (or one labeled for use with RG-174 cable).
- 6. Use heat shrink to cover crimp.

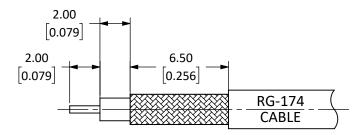

RECOMMENDED CABLE STRIPPING DIMENSIONS CAN ALSO BE USED WITH: RG-188 & RG-316

