



# MMBTA92W

## PNP HIGH VOLTAGE TRANSISTOR

**VOLTAGE** 300 Volt **POWER** 150 mWatt

### FEATURES

- PNP silicon, planar design
- High voltage (max. 300V)
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard


### MECHANICAL DATA

Case: SOT-323, Plastic

Terminals: Solderable per MIL-STD-750, Method 2026

Approx. Weight: 0.005 gram

Marking: A9W

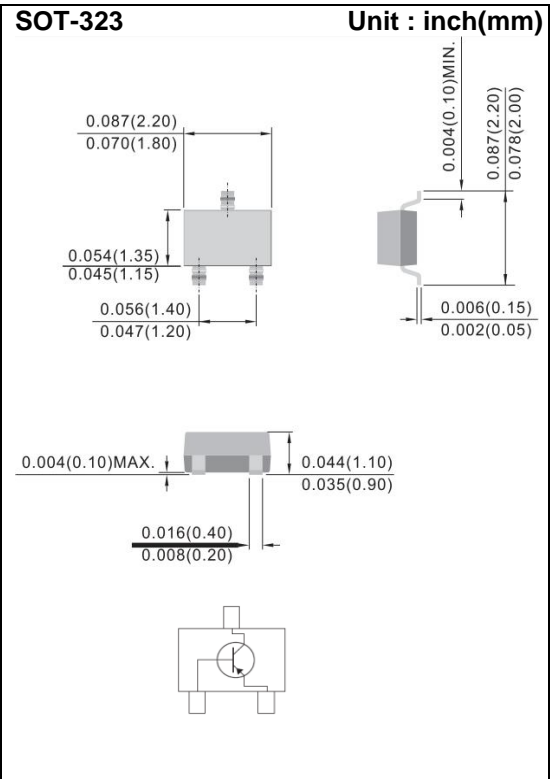

### ABSOLUTE RATINGS

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-base voltage	V <sub>CBO</sub>	-300	V
Collector-emitter voltage	V <sub>CEO</sub>	-300	V
Emitter-base voltage	V <sub>EBO</sub>	-5	V
Collector current (DC)	I <sub>C</sub>	500	mA
Maximum power dissipation (note1)	P <sub>D</sub>	150	mW
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C

Note : 1.Mounted on an FR4 PCB, single-sided copper, mini pad.



# MMBTA92W

## THERMAL CHARACTERISTICS

PARAMETER	CONDITIONS	SYMBOL	VALUE	UNIT
Thermal resistance from junction to ambient	note 1	$R_{\theta JA}$	550	°C/W


Note : 1. Mounted on a FR4 PCB, single-sided copper, mini pad.

## CHARACTERISTICS $T_A=25^{\circ}\text{C}$ unless otherwise specified


PARAMETER	CONDITIONS	SYMBOL	MIN.	MAX.	UNIT
Collector-emitter breakdown voltage	$I_C=-1\text{mA}; I_B=0$	$V_{(BR)CEO}$	-300	-	V
Collector-base breakdown voltage	$I_C=-100\mu\text{A}; I_E=0$	$V_{(BR)CBO}$	-300	-	V
Emitter-base breakdown voltage	$I_E=-100\mu\text{A}; I_C=0$	$V_{(BR)EBO}$	-5	-	V
Collector cut-off current	$I_E=0; V_{CB}=-300\text{V}$	$I_{CBO}$	-	-0.25	$\mu\text{A}$
Collector-emitter cut-off current	$V_{CES}=-300\text{V}$	$I_{CES}$	-	-250	nA
Emitter cut-off current	$I_C=0; V_{EB}=-3\text{V}$	$I_{EBO}$	-	-0.1	$\mu\text{A}$
DC current gain	$V_{CE}=-10\text{V};$ $I_C=-1\text{mA}$ $I_C=-10\text{mA}$ $I_C=-30\text{mA}$	$h_{FE}$	25 40 25	- - -	- - -
Collector-emitter saturation voltage	$I_C=-20\text{mA}; I_B=-2\text{mA}$	$V_{CE(SAT)}$	-	-0.5	V
Base-emitter saturation voltage	$I_C=-20\text{mA}; I_B=-2\text{mA}$	$V_{BE(SAT)}$	-	-0.9	V
Collector capacitance	$I_E=0; V_{CB}=-20\text{V};$ $f=1\text{MHz}$	$C_{CB}$	-	6	pF
Transition frequency	$I_C=-10\text{mA}; V_{CE}=-20\text{V};$ $f=100\text{MHz}$	$f_T$	50	-	MHz




# MMBTA92W

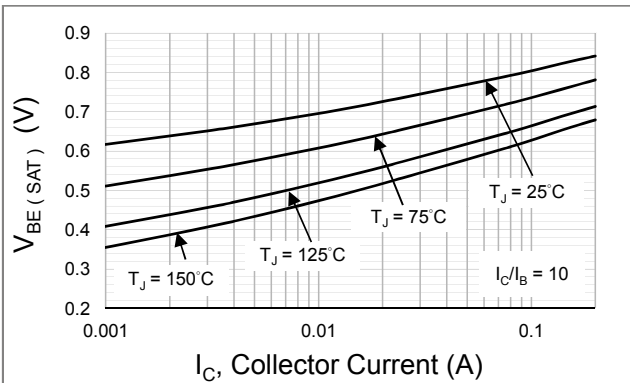


**Fig.1 Typical Base-Emitter Saturation Voltage**

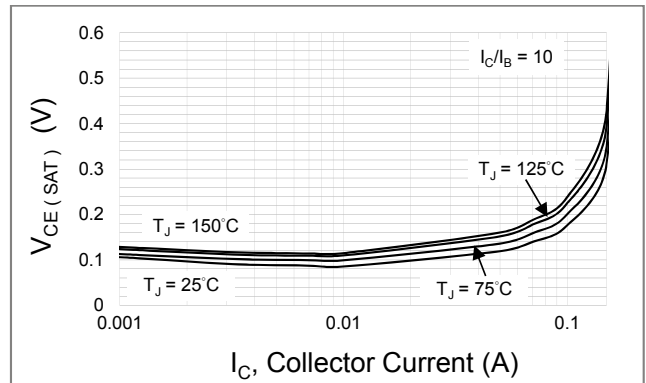


**Fig.2 Typical Collector-Emitter Saturation Voltage**

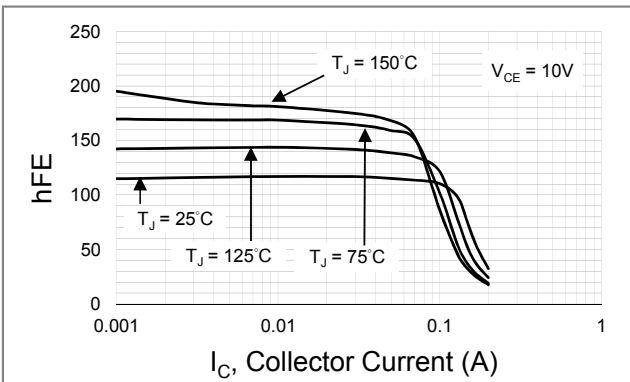

**Fig.3 Typical DC Current Gain vs Collector Current**

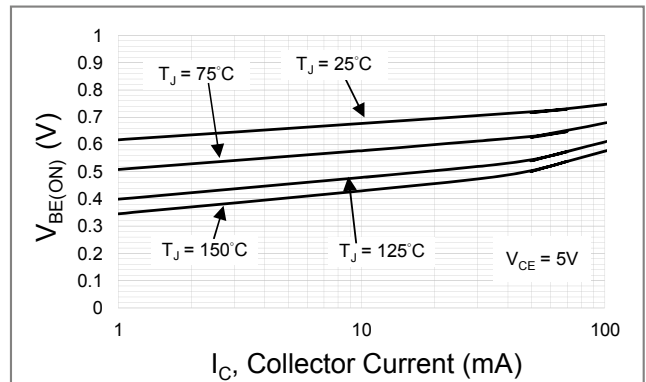

**Fig.4 Typical Base - Emitter Voltage vs Collector Current**

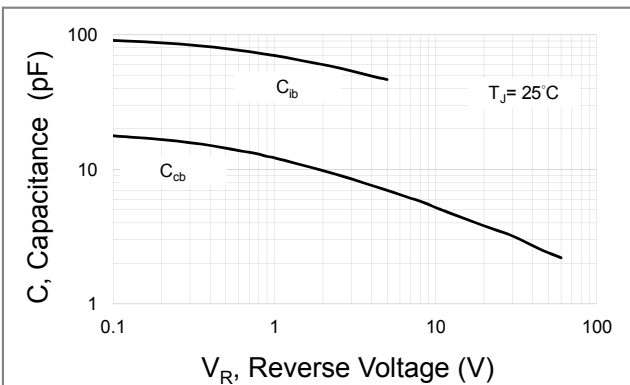


**Fig.5 Typical Capacitance**



# MMBTA92W

## MOUNTING PAD LAYOUT

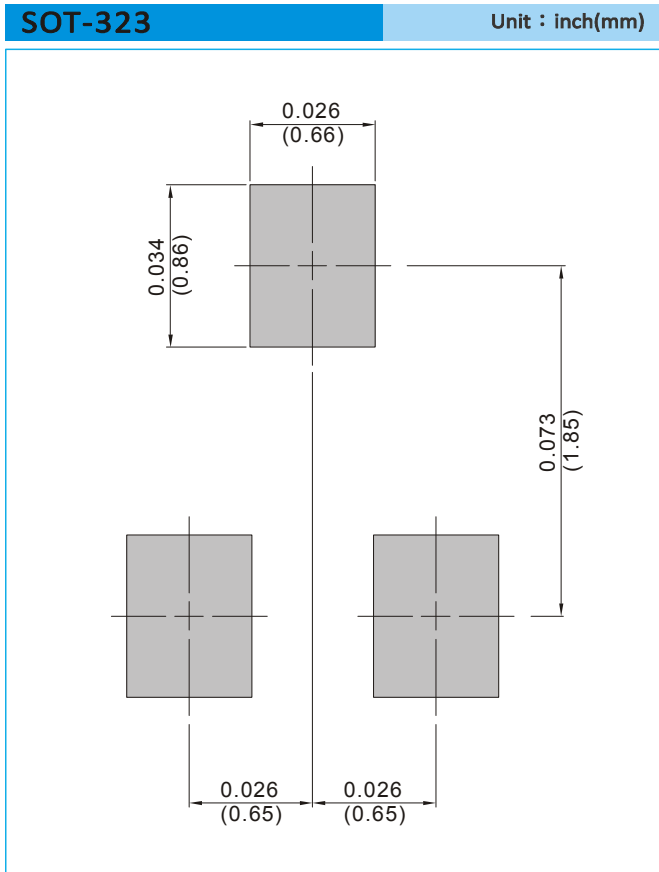

## ORDER INFORMATION

- Packing information  
T/R - 12K per 13" plastic Reel  
T/R - 3K per 7" plastic Reel



# MMBTA92W

## Part No\_packing code\_Version

MMBTA92W\_R1\_00001

MMBTA92W\_R2\_00001

For example :

**RB500V-40\_R2\_00001**



Packing Code <b>XX</b>				Version Code <b>XXXXX</b>		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	<b>A</b>	N/A	<b>0</b>	<b>HF</b>	<b>0</b>	serial number
Tape and Reel (T/R)	<b>R</b>	7"	<b>1</b>	<b>RoHS</b>	<b>1</b>	serial number
Bulk Packing (B/P)	<b>B</b>	13"	<b>2</b>			
Tube Packing (T/P)	<b>T</b>	26mm	<b>X</b>			
Tape and Reel (Right Oriented) (TRR)	<b>S</b>	52mm	<b>Y</b>			
Tape and Reel (Left Oriented) (TRL)	<b>L</b>	PANASERT T/B CATHODE UP (PBCU)	<b>U</b>			
FORMING	<b>F</b>	PANASERT T/B CATHODE DOWN (PBCD)	<b>D</b>			



## MMBTA92W

---

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.