


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use of this information for any purpose other than the intended purpose is strictly prohibited. CONNPLY reserves the right to exercise such rights to exercise such rights does not constitute a waiver of such rights. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/18/22'		

NOTES:
 Rated voltage:1000V/DC.
 Rated current:120A Max.
 Temp.Range:-40°C~+125°C.
 Protection grade:IP67.
Materials:
 Contact: Copper Alloy,Ag plated.
 Insulator: Nylon.
 Sealings: Silicone
Product Number Code:

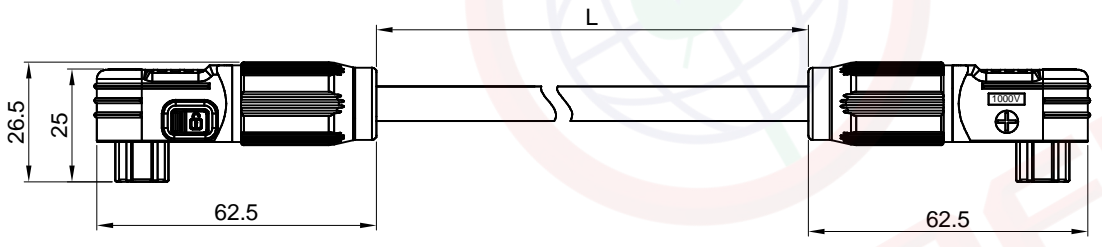

DS1168-07 - X X X X

- Wire length(Dim L)
0050:50mm
0500:500mm
1500:1500mm
- Mounting type
R: R/A type
- Connector type
S: Socket
- Rated current
120:120A


GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	120A ES Cable Harness	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1168-07 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNPLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 3				
DRAWING NO.		C-DS1168-07-XXXXXX-A					

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to the product specifications without notice. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/18/22'		

NOTES:
 Rated voltage:1500V/DC.
 Rated current:200A Max.
 Temp.Range:-40°C~+125°C.
 Protection grade:IP67.
 Materials:
 Contact: Copper Alloy,Ag plated.
 Insulator: Nylon.
 Sealings: Silicone
 Product Number Code:

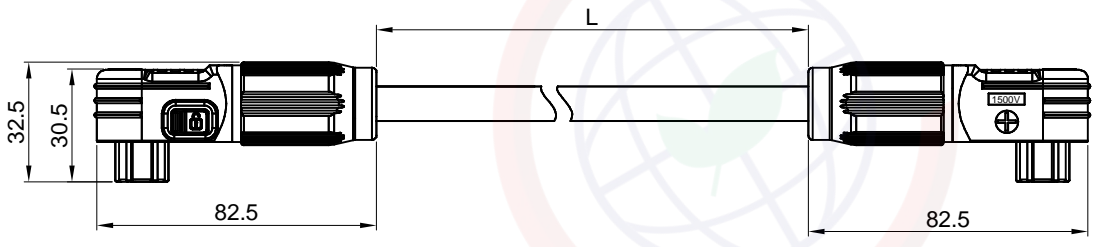

Product Number Code:
 DS1168-07 - X X X X
 Wire length(Dim L)
 0050:50mm
 0500:500mm
 1500:1500mm
 Mounting type
 R: R/A type
 Connector type
 S: Socket
 Rated current
 200:200A

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	200A ES Cable Harness	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1168-07 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	2 OF 3				
DRAWING NO.	C-DS1168-07-XXXXXX-A						