

Voltage

Features

٠

•

•

•

•

PE1403M2Q

Ultra low capacitance

Low clamping voltage

Case: Molded plastic, DFN 3L

USB 3.0 Data Line Protection

Mobile Phones and accessories

Computer Interfaces Protection

Control Signal Lines Protection

Serial and Parallel Ports Protection

Mechanical Data

Applications

Hand held portableDigital Cameras

Ultra Low Capacitance ESD Protection

Low leakage current, maximum of 50nA at rated voltage

• Green molding compound as per IEC 61249 standard


3.3 V

IEC61000-4-4(EFT) : 40A(5/50ns)
IEC61000-4-5(Lightning) : 3A(8/20µS)

• IEC61000-4-2(ESD) : ±18kV Air, ±15kV Contact

Lead free in compliance with EU RoHS 2.0

• Approx. Weight: 0.00004 ounces, 0.0011 grams

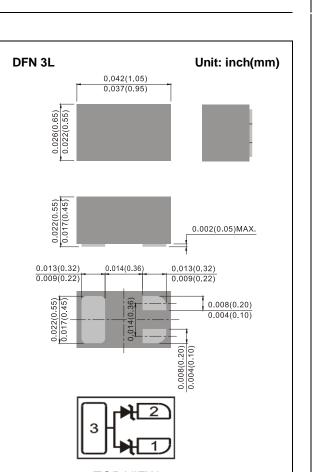

TOP VIEW

Maximum Ratings

PARAMETER	SYMBOL	VALUE	UNITS	
ESD IEC61000-4-2(Air)	N	±18	kV	
ESD IEC61000-4-2(Contact)	V_{ESD}	±15		
Operating Junction Temperature Range	ΤJ	-55 to +150	°C	
Storage Temperature Range	T _{STG}	-55 to +150	°C	




PE1403M2Q

Electrical Characteristics

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage (Note 1)	V_{RWM}	-	-	-	3.3	V
Reverse Breakdown Voltage	V_{BR}	I _{BR} =1mA	4	-	-	V
Reverse Leakage Current	I _R	V _R =3.3V	-	-	50	nA
Clamping Voltage	V _{CL}	I _{PP} =1A, t _P =8/20μs	-	-	9	V
		I _{PP} =3A, t _P =8/20μs	-	-	13	V
Clamping Voltage TLP (Note 2)	V _{CL}	I _{PP} =8A, t _P =100ns	-	15	-	V
		I _{PP} =16A, t _P =100ns	-	22	-	V
Dynamic Resistance	R_{DYN}	t _P =100ns	-	0.88	-	Ω
Off State Junction Capacitance	CJ	0Vdc Bias f=1MHz, any I/O pins to GND	-	-	0.4	pF
		0Vdc Bias f=1MHz, Between any I/O pins	-	-	0.2	pF

Note :

- 1. A transient suppressor is selected according to the working peak reverse voltage(V_{RWM}), which should be equal to or greater than the DC or continuous peak operation voltage level.
- 2. Testing using Transmission Line Pulse (TLP) conditions: $Z0 = 50\Omega$, $t_P = 100$ ns.

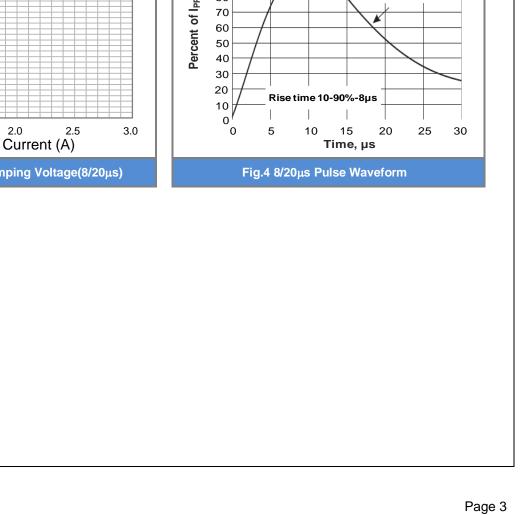

TYPICAL CHARACTERISTIC CURVES 16 0.5 C_J, Junction Capacitance (pF) IO to GND 14 0.4 TLP Curent (A) IO to GND 0.3 0.2 IO to IO 6 4 0.1 2 0 0 0 5 10 15 20 25 1.0 1.5 2.0 0.0 0.5 2.5 TLP Volatge (V) V_R, Reverse Bias Voltage (V) **Fig.1 Typical Junction Capacitance** Fig.2 Transmission Line Pulsing (TLP) Measurement 12 V_C, Clamping Voltage (V) 100 10 to GND 10 90 50% of I_{PP}@20µs 80 Percent of I_{PP} 8 6 4 2 0 1.0 1.5 I_{PP}, Peak Current (A) Fig.3 Typical Peak Clamping Voltage(8/20µs)








PE1403M2Q

Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
PE1403M2Q_R1_00001	DFN 3L	8K pcs / 7" reel	RH	Halogen free

Mounting Pad Layout

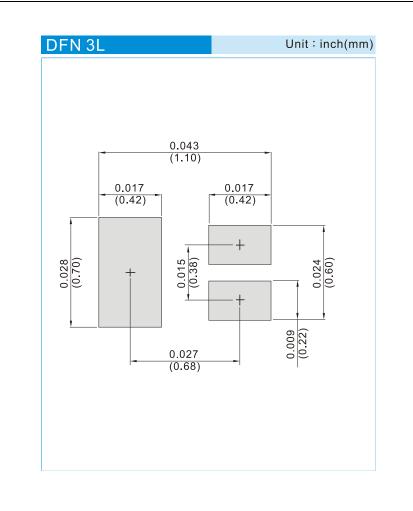



PE1403M2Q

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.