MGlass 1s





- **Wireless Cast support**

Miracast、DLNA 、Airplay

Mbox for Cast

- **Electric Diopter adjust**

Multi users support & easy use

Various adjusting mode

- **Easy Use**

Batery inside

WIFI & BT & BLE

IMU Sensor

Wear detection

- **4K Digital Cinema**

200 inch@5 meter

1920*1200 resolution

90%DCI-P3

Stereo speaker

- **Optical Design**

Diopter range +0D ~ -6D

IPD 60 ~ 72mm

FOV 55°

PPD 42

- **Thin & Light**


16.5mm thinkness

~300g Weight

OKRA Confidential

Spec

Product Name		MGlass 1s
Product Model		M1s
Main Config	Platform	RK3566
	CPU	Quad-Core Cortex-A55
	GPU	Mali-G52 1-Core-2EE
	RAM	2GB LPDDR4
	ROM	32GB eMMC5.1
	OS	Android 11

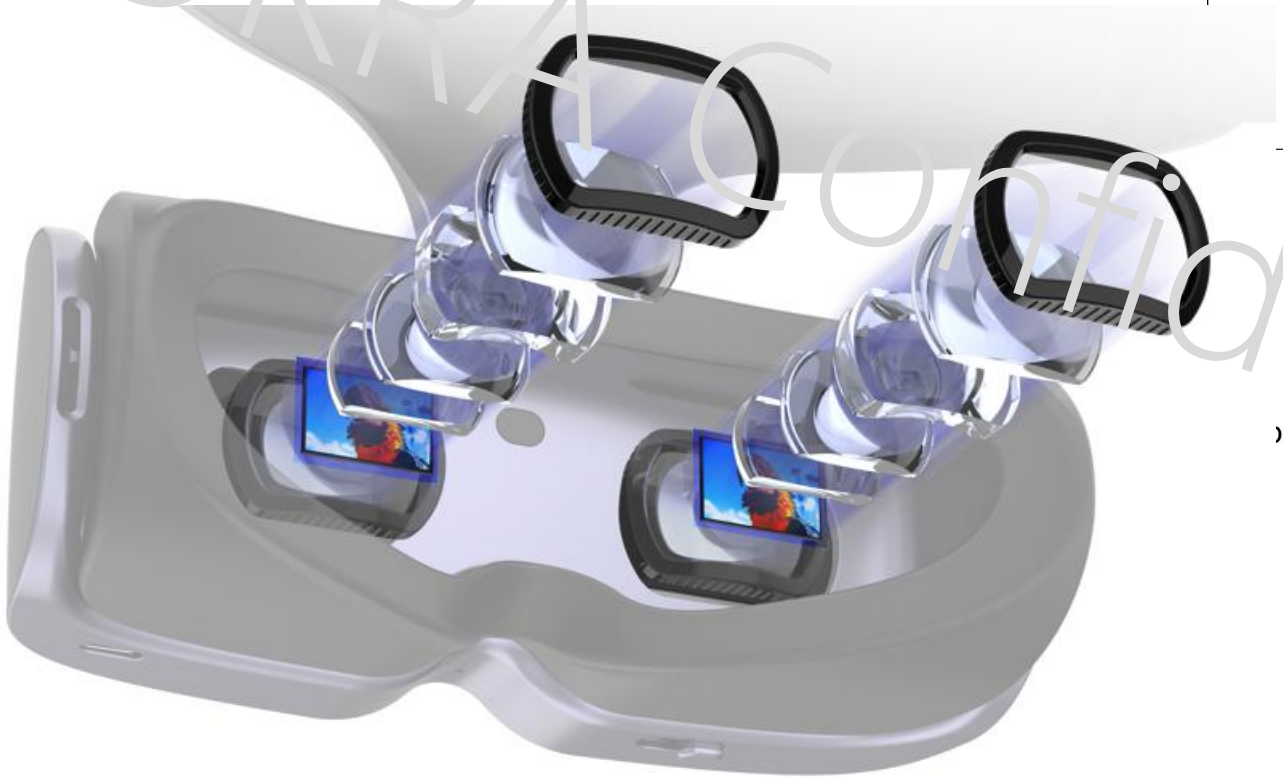

Display	Type	SeeYa Si-OLED
	Size	0.72'' (1920×1200)
	Quantity	* 2
	Aspect ratio	16:10
	Resolution	1920 × 1200 × 2 RGB
	Interface	MIPI
	Framerate	60Hz
Optical	Solution	Lensgroup type
	Diopter Range	0D ~ -6D
	IPD	60 ~ 72mm
	FOV	55° (0D)
	FOV Tolerance	±2°
	Luminace to eyes	400nits @ Center
	Chrmatic MTF	0F:>0.9@30lp/mm; 1.0F>0.5@30lp/mm
	TV distortion	<3%

OKRA Confidential

秋葵·秘
Confidential



Audio	Type	Speaker
	Quantity	* 2
	Power	1W
	SPL	87dB（0.1W/0.1m）
	THD	＜5%（200-8000Hz）
	FR	F0＜350Hz
	EQ	Smart PA
Micphone	Quantity	* 1
	SN	60dB(1KHz S.P.L=1Pa)
Keys	Power key	Yes
	Function key	hot key * 2
Sensors	Acceleration	Yes
	Gyroscope	Yes
	Geomagnetism	Yes
	Psensor	Yes
I/O	Type-C USB 3.0	Yes，×1
	TF card	Yes，×1
LED	RGB Led	Yes

OKRA Confidential


Spec



Net	BT&BLE	Yes
	WIFI5	2.4/5GHz 802.11 a/b/g/n/ac 2×2 MIMO
	Miracast	Yes
	DLNA&Airplay	Yes
	SeeYA Cast	Yes
Multimedia	Video Container	MPEG 1/2/4,Sorenson H.263,H.263,H.264, HEVC/H.265, AVS,AVS+,Motion JPEG,VP8, VP9, RV30,RV40,
	Audio Container	MPEG1/2,AC3, EAC3,VORBIS,DTS,LPCM,LBR(cook),FLAC, DRA, DTS LBR,DTS XLL,AAC
	Photo	JPEG, PNG, BMP
Power	Battery	Yes
	capacity	3000mAh
	Charge Parameters	5V-2.1A
	Working time	3Hours
	Power Consumption	<3W
Dimension		W 151.5 x H 55.5 x T16.5mm
Weight		300g

OKRA Confidential

Glass Dimension：W 151.5 x H 55.5 x T16.5mm

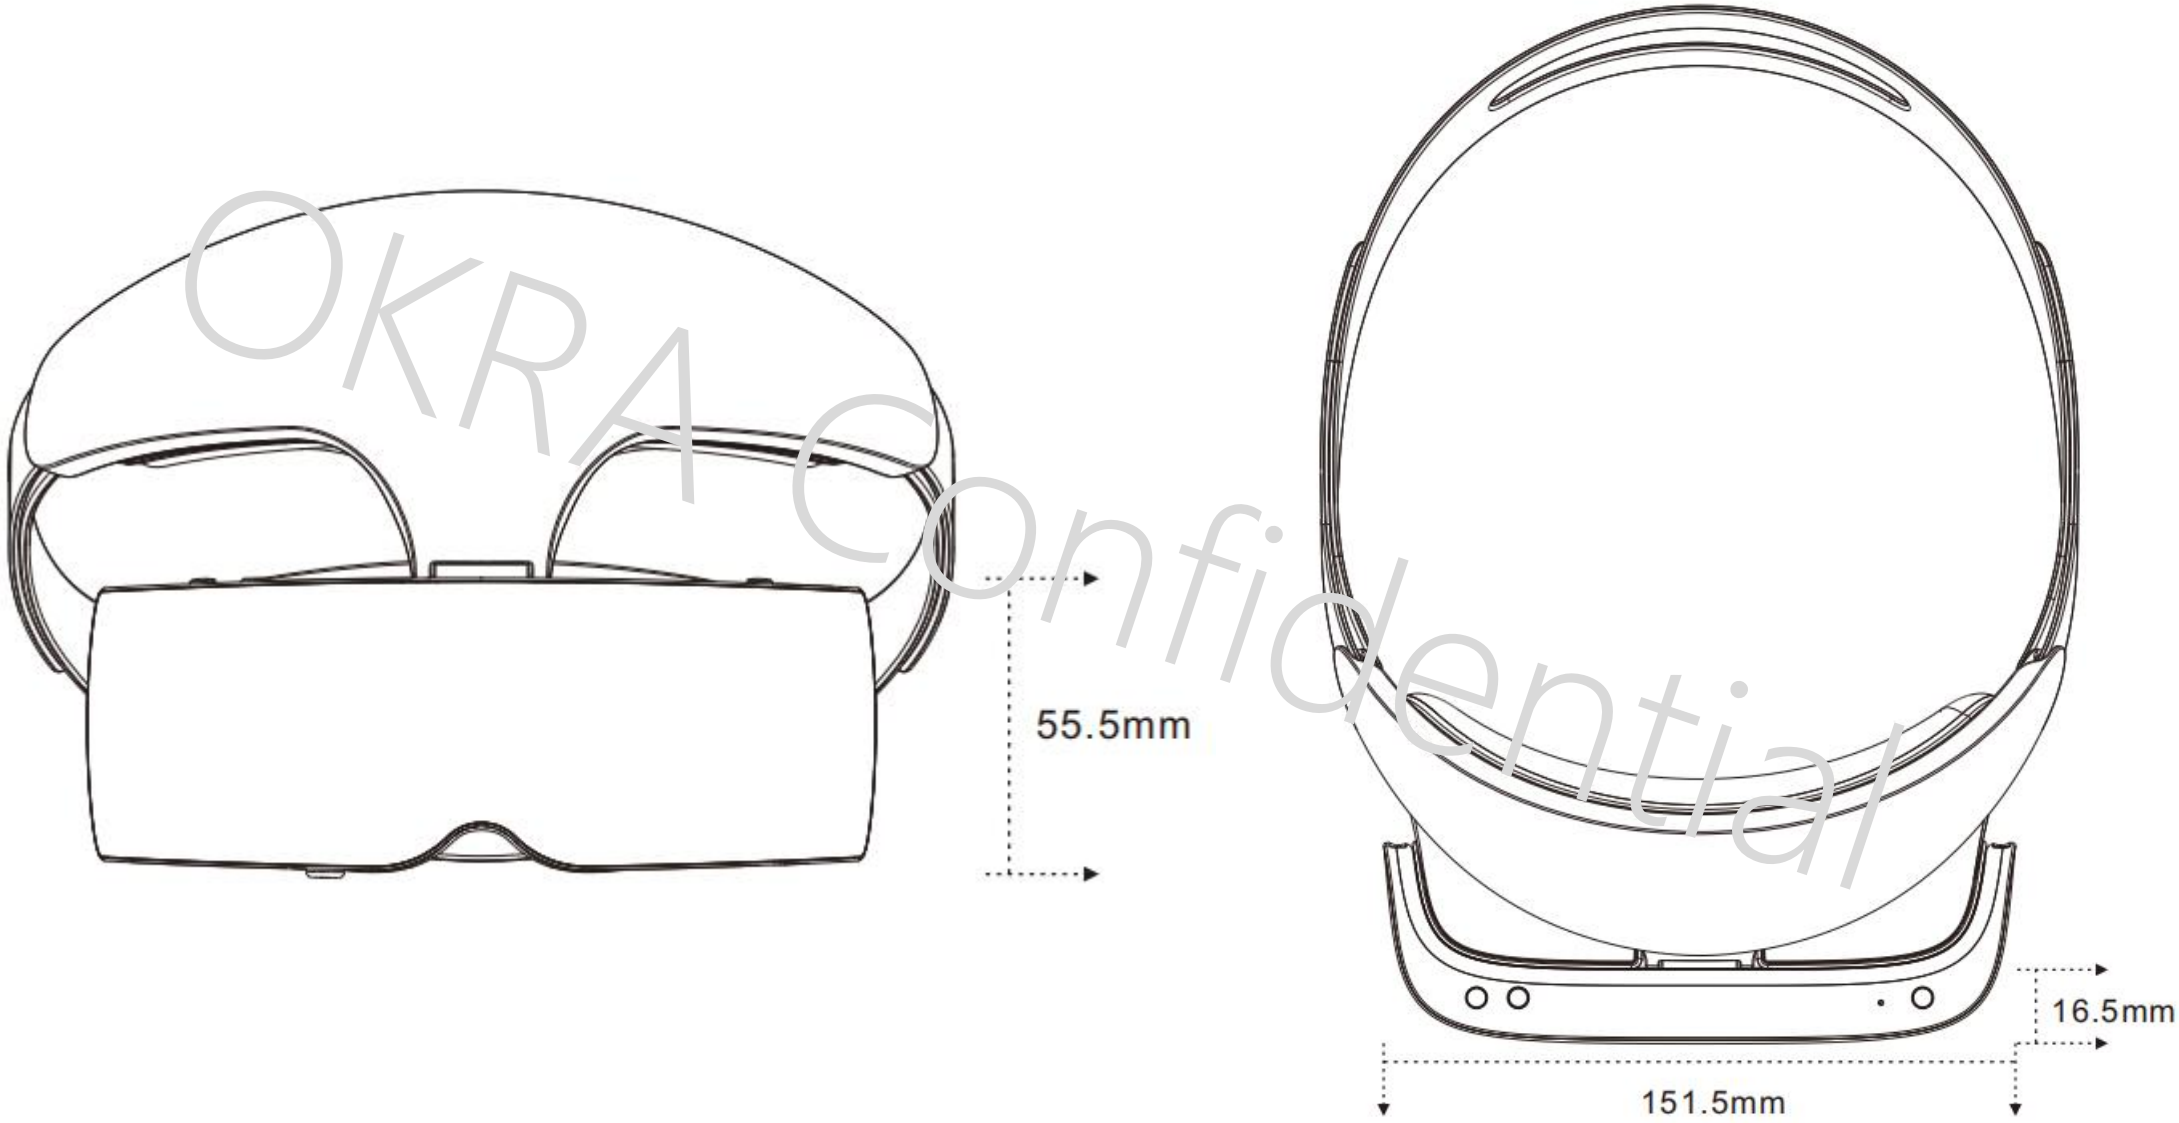



OKRA Confidential

Interface introduce

OKRA Confidential



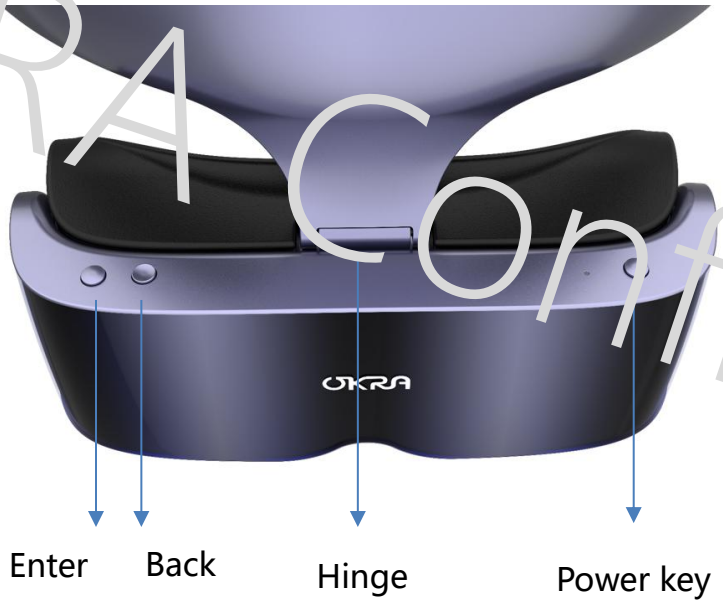

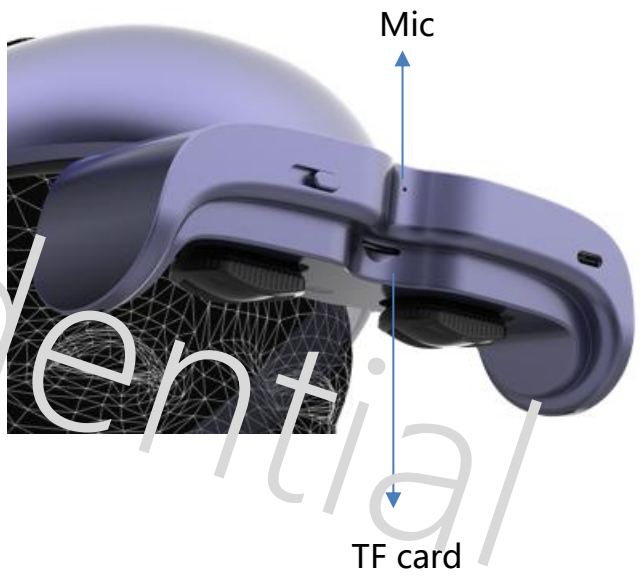




Basic Operations

1. **Hinge adjust**: Hinge adjust angle -15° ~ 75°, after wear the glass on the head, adjust the correct angle until clearly. Also you can make the hinge to 75° to see outside.
2. **Eyeshade install & remove:** this is Magnetic suction design, it is convenient to install or remove.
3. **BT Controller Directly Pair& connect**: Long Press Back key 3s, the Glass enter BT pair mode, then controller can easy Connect it.

BT Controller introduce

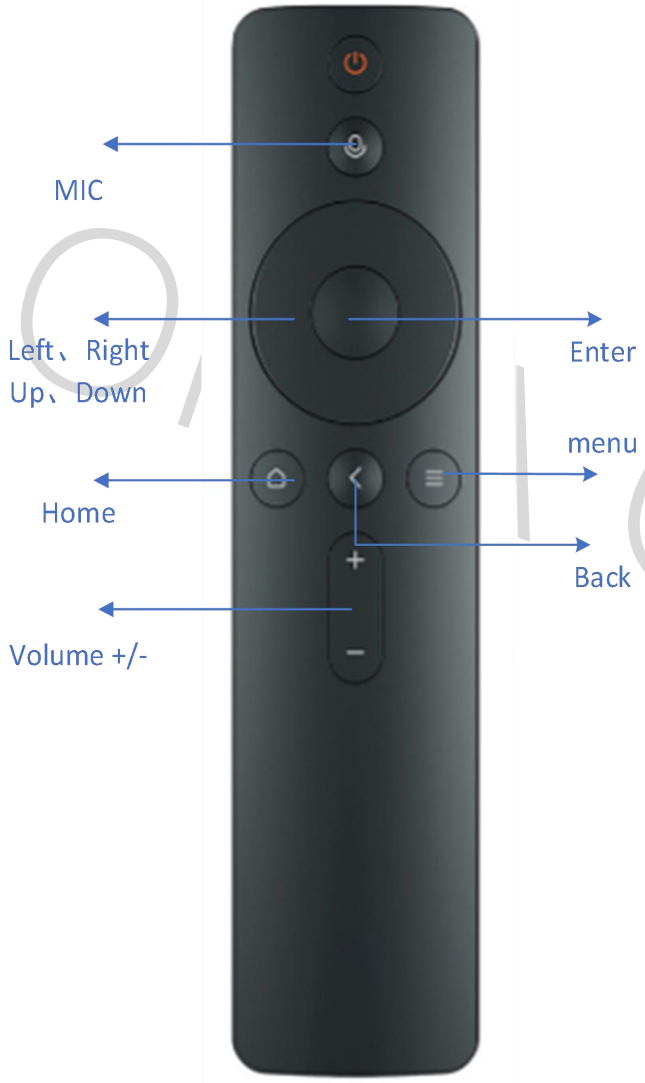

Basic Operations

1. **Auto Connected:** Press any key, Controller will auto connect the device if Previously connected.
2. **Pair mode：** Long Press Home and Menu key 3 seconds at the same time，Controller will enter into Pair mode with Led flash, host device can pair and connect it. If Pair it fail, the Led will keep flashing about 1 minute then enter Sleep mode.
3. **Hot Key for Voice Control:** Press the key，after hear “DADA” Beep，Say Command in Chinese，for example“左眼500度，右眼450度”，then it will auto match the Myopia target.

OKRA Confidential

Package


- ✓ Glass x 1
- ✓ Controller x 1
- ✓ Battery x 1
- ✓ Eyeshade x 1
- ✓ Storagebox x 1



OKRA Confidential

秋葵·秘
Confidential



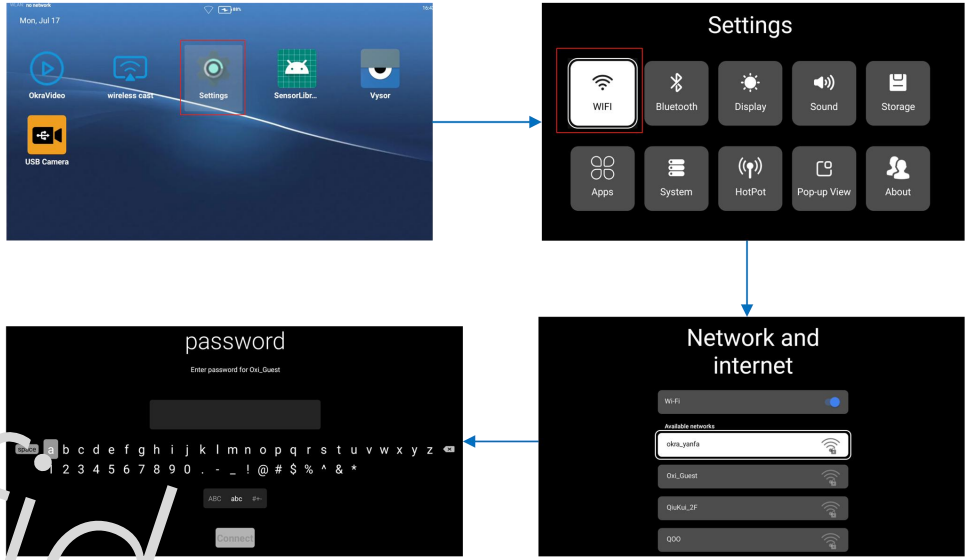

OKRA Confidential

Basic Operations

1. **Power on/off:** Press Glass power key 3s to startup. After enter into Desktop, press Controller any key to startup and connect. BT controller will auto connect the device if Previously connected.
2. **Power/USB Data**: Support charging while using, and copy videos to device.

Connect to WiFi

1. Enter the Setting app.
2. Enter the WiFi.
3. Select the network.
4. Enter the Password.
5. Then you can watch videos locally or online

秋葵·秘
Confidential

example



Confidential

1. watch 3D video?

1. Download 3D video by yourself , And the video has a Condition its format must be “side by side”.
2. Turn on device and connect it to computer by USB TypeC port.
3. Copy the video to the device, the file path has no limit.
4. Play the video from OkraVideo APP , device will recognize 2D/3D automatically , and mark in the upper right corner.
5. If the mark of 3D is not displayed , long press the enter button to switch 3D mode manually.

秋葵·秘
Confidential

example



2. watch Panoramic video?

1. Download Panoramic video by yourself , Only 2D&360° format are supported.
2. Turn on device and connect it to computer by USB TypeC port.
3. Copy the video to the fullvideo folder.
4. Play the video from OkraVideo APP.
5. Panoramic video can displayed with different angle of view by tracking your head attitude.

OKRA Confidential

3. How to control the device with commands?

1. Download the developer kit , Path：https://pan.baidu.com/s/11KXVTFSd5U-vw7N8lFw4rQ　　Code：kgpq
2. The kit “adb-tools” is used to control the device by command.
3. The kit “DriverAssitant_v5.1.1” is the driver for flash the firmware.
4. The kit “RKDevTool_Release_v2.84” is the tool flash the firmware.
5. “DriverAssitant_v5.1.1” and “RKDevTool_Release_v2.84” usually not used.

4. How to change the language?

1. Setting -> System -> Language.

5. How to install APP?

- ✓ Download the developer kit refer to the FAQ3.
- ✓ Open the “cmd.exe” from the “adb-tools” folder.
- ✓ Then turn on the device and connect it to computer using typeC.
- ✓ Enter the command:” adb install (the path of APK)”,

```
C:\Users\SH-D198>adb install D:\1.视涯\视频\常用软件\app-store.apk
Performing Streamed Install
Success
```

OKRA Confidential

Thanks !