## M57962CL-01

#### HYBRID IC FOR DRIVING IGBT MODULES

#### **DESCRIPTION**

M57962CL is a hybrid integrated circuit designed for driving nchannel IGBT modules in any gate-amplifier application. This device operates as an isolation amplifier for these modules and provides the required electrical isolation between the input and output with an opto-coupler.


Recommended modules : VcEs=600V series up to 600A class VcEs=1200V series up to 400A class


#### **FEATURES**

- ●Electrical isolation between input and output with opto-coupler (Viso=2500Vrms for 1minute)
- Two supply driver topology
- •Built-in short circuit protection circuit (With a pin for fault out)
- •Variable fall time on activity of short circuit protection
- ●TTL compatible input interface

#### **APPLICATION**

To drive IGBT modules for inverter or AC servo systems application.



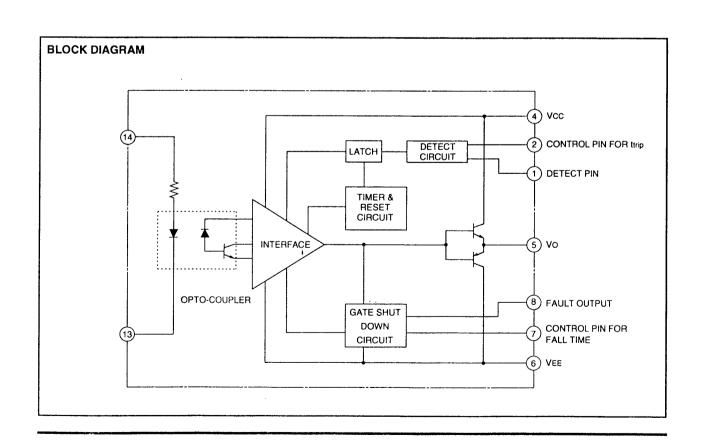

## MAXIMUM RATINGS (Ta=25°C, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply voltage	DC	18	V
VEE	Cupply vollage		-15	V
Vi	Input voltage	Applied between: 13-14	-1~+7	V
Vo	Output voltage	Output voltage "H"	Vcc	V
Іонр	Output current	Dulas visits on a 45 court	-5	Α
IOLP	Output current	Pulse width 2 µ s, f≦20kHz	5	Α
Viso	Isolation voltage	Sine wave voltage 60Hz, for 1min.	2500	Vrms
Тс	Case temperature		85	T °C
Topr	Operating temperature		-20~+60	°C
Tstg	Storage temperature		-25~+100	°C
lfo	Fault output current	Applied ® pin	20 mA	
VR1	Input voltage	Applied ① pin	50	V


## ELECTRICAL CHARACTERISTICS (Ta=25°C, Vcc=15V, VEE=-10V, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit	
Зутьы	raiametei	l est conditions		Тур	Max	Offic	
Vcc	Cumply voltage	Recommended range	14	15	-	V	
VEE	Supply voltage		-7	_	10	V	
Vin	Pull-up voltage on input side	Recommended range	4.75	5	5.25	V	
lıн	"H" input current	Recommended range	15.2	16	19	mA	
f	Switching frequency	Recommended range	_	_	20	kHz	
Rg	Gate resistor	Recommended range	2	_	_	Ω	
lıн	"H" input current	VIN=5V		16	-	mA	
Vон	"H" output voltage		13	14	_	٧	
Vol	"L" output voltage		-8	-9	_	٧	
<b>t</b> PLH	"L-H" propagation time	IIH=16mA		0.5	1	μS	
tr	"L-H" rise time	I <sub>I</sub> H=16mA		0.6	1	μS	
<b>t</b> PHL	"H-L" propagation time	IiH=16mA		0.8	1.3	μS	
tí	"H-L" fall time	IiH=16mA	<b>—</b>	0.4	1	μS	
ttimer	Timer	Between start and cancel (under input sign "L")	1	_	2	ms	
IFO	Fault output current	Applied ®pin, R=4.7kΩ	_	5		mA	
ttrip1	Controlled time detect short circuit 1	Pin ①: 15V and more, pin ②: open	_	2.6	_	μs	
ttrip2	Controlled time detect short circuit 2 (*2)	Pin 1: 15V and more, pin 2-4: 1000pF (connective capacitance)	_	3	_	μs	
Vsc	SC detect voltage	Collector voltage of module	15	-	_	٧	


(\*2) Length of wiring of condenser controlled time detect short circuit is within 5cm from ② and ④ pin coming and going.


#### **DEFINITION OF CHARACTERISTICS**

## (1) SWITCHING OPERATION



## (2) OPERATION OF SHORT CIRCUIT PROTECTION



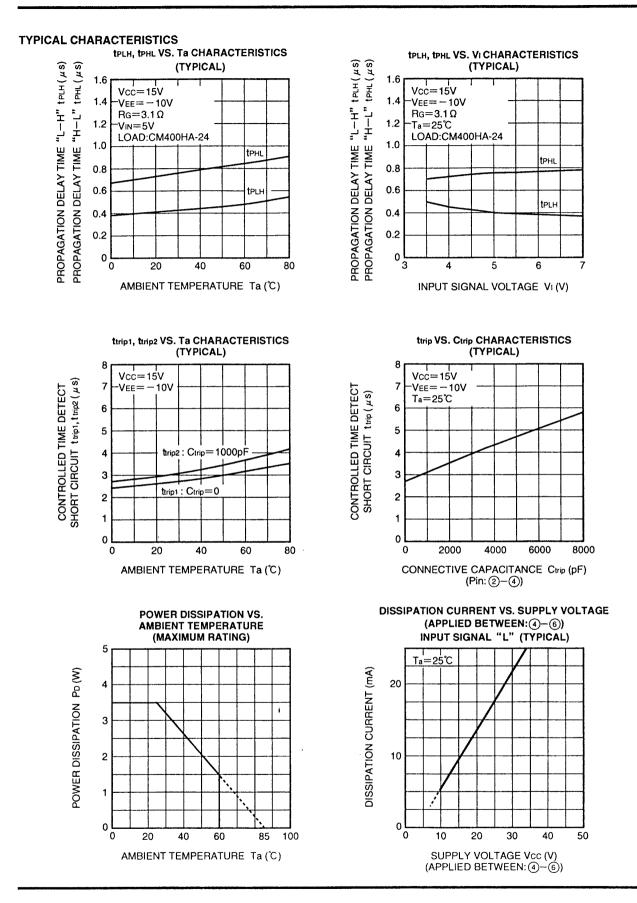


#### **OPERATION OF PROTECTION CIRCUIT**

- (1) In case the gate voltage is "H" and the collector voltage is high, this hybrid IC will recognize the circuit as short circuit and immediately reduce the gate voltage. Besides, put out an error sign ("L") which inform that protection circuit is operating at the same time from ® pin.
- (2) The protection circuit reset and resorted to ordinary condition if input sign is "L" when the premised 1~2ms passed. ( "L" period needs 5  $\mu$ s or more with  $\bigcirc$  pin open)
- (3) When the output rises, the controlled time detect short circuit (Typ 2.6  $\mu$ s) is set up so that on-time of IGBT can be secured

It is possible to adjust that time by connecting the capacitor (Ctrip) between (2) and (4) pin.

## **OPERATION FLOW ON DETECTING SHORT CIRCUIT**

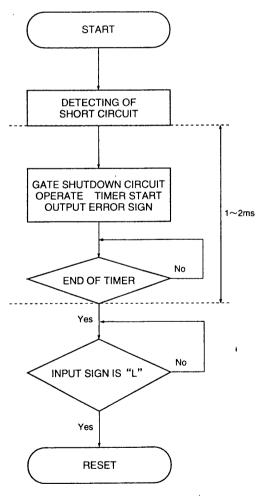



Note: "L" output voltage with protection circuit operating is about VEE +2V.

## ADJUSTMENT OF OUTPUT FALL TIME


(When the protection circuit is operating)

In case you want to decrease the speed of reverse bias when the protection circuit is operating, you can adjust that speed by connecting the capacitor (Cs) between 6 and 7 pin. (Refer to under figures.)






#### **APPLICATION CIRCUIT EXAMPLE**



#### APPLICATION EXAMPLE OF SINGLE POWER SUPPLY



VCC=25V

Crev=100 μ F

 $R_1=2.7k\Omega$ 


\*\*Don't input on-sign until the provided (R1×Crev(s)) time has been exceeded after supplied power to this hybrid IC.

#### **PRECAUTION**

- (1) Because the ③, ⑨ pin are pin dedicated to the test, the usage with electrical connections from the outside are not permitted. Please make sure not to use these pin under such kind of conditions.
- (2) Voltage compensate condenser are expected to be located as close as possible from the hybrid IC.
- (3) D1 requires approximately the same voltage of power modules.
- (4) When recovery current flow in D1, ① pin is applied high voltage. In that case, counterplan for protection which insert a zener diode between ① and ⑥ pin are necessary like above diagram.
- (5) In case ② pin is operating, the wiring are expected to be wired as close as possible from ② and ④ pin.

(Standard length:5cm and less coming and going)

## APPLICATION EXAMPLE OF HIGH POWER MODULE



VCC=15V

VEE=10V

Ctrip=1000pF

C1, C2≥100 µF (low impedance)

## FOR SAFETY USING

Great detail and careful attention are given to the production activity of Hics, such as the development, the quality of production, and in it's reliability. However the reliability of Hics depends not only on their own factors but also in their condition of usage. When handling Hics, please note the following cautions.

	CAUTIONS		
Packing	The materials used in packing Hics can only withstand normal external conditions.  When exposed to outside shocks, rain and certain environmental contaminators, the packing materials will deteriorates. Please take care in handling.		
Carrying	<ol> <li>Don't stack boxes too high. Avoid placing heavy materials on boxes.</li> <li>Boxes must be positioned correctly during transportation to avoid breakage.</li> <li>Don't throw or drop boxes.</li> <li>Keep boxes dry. Avoid rain or snow.</li> <li>Minimal vibration and shock during transportation is desirable.</li> </ol>		
Storage	<ul> <li>When storing Hics, please observe the following notices or possible deterioration of their electrical characteristics, risk of solderability, and external damage may occur.</li> <li>1) Devices must be stored where fluctuation of temperature and humidity is minimal, and must not be exposed to direct sunlight. Store at the normal temperature of 5 to 30 degrees Celsius with humidity at 40 to 60%.</li> <li>2) Avoid locations where corrosive gasses are generated or where much dust accumulates.</li> <li>3) Storage cases must be static proof.</li> <li>4) Avoid putting weight on boxes.</li> </ul>		
Extended storage	When extended storage is necessary, Hics must be kept non-processed. When using Hics which have been stored for more than one year or under severe conditions, be sure to check that the exterior is free from flaw and other damages.		
Maximum ratings	To prevent any electrical damages, use Hics within the maximum ratings. The temperaqture, current, voltage, etc. must not exceed these conditions.		
Polarity	To protect Hics from destruction and deterioration due to wrong insertion, make sure of polarity in inserting leads into the board holes, conforming to the external view for the terminal arrangement.		

# ISAHAYA ELECTRONICS CORPORATION

Marketing division, Marketing planning department 6-41 Tsukuba, Isahaya, Nagasaki, 854-0065 Japan

Keep safety first in your circuit designs!

safety first in your circuit designs!
ISAHAYA Electronics Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1)placement of substitutive, auxiliary circuits, (2)use of non-flammable material or (3)prevention against any malfunction or mishap.

Notes regarding these materials

These materials
 These materials are intended as a reference to assist our customers in the selection of the ISAHAYA products best suited to the customer's application; they don't convey any license under any intellectual property rights, or any other rights, belonging ISAHAYA or a third party.
 ISAHAYA Electronics Corporation assumes no responsibility for any damage, or infringement of any third party's rights,

originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.

- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by ISAHAYA Electronics Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for the latest product information before purchasing product listed
- · ISAHAYA Electronics Corporation products are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact ISAHAYA electronics corporation or an authorized ISAHAYA products distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.

  The prior written approval of ISAHAYA Electronics Corporation is necessary to reprint or reproduce in whole or in part these

materials

- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- · Please contact ISAHAYA Electronics Corporation or an authorized ISAHAYA products distributor for further details on these materials or the products contained therein.