



DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20161125-1	ORIGINAL RELEASE		

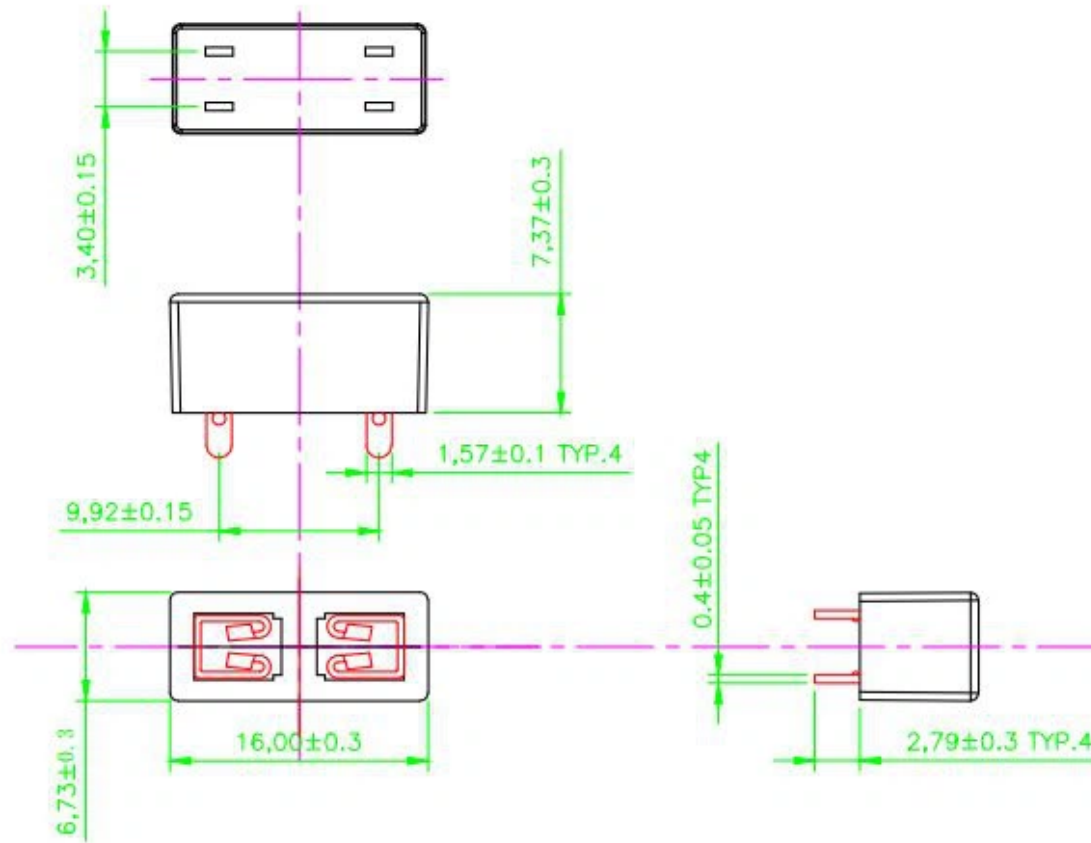

### MOUNTING DETAIL

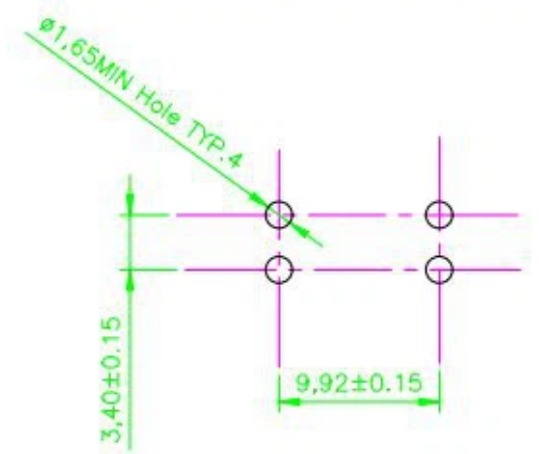

NOTES: UNLESS OTHERWISE SPECIFIED.

1. material: Contacts--brass, T=0.4mm;  
Insulator--NYLON PA66 94V0;
2. terminal finish: Tin plated;
3. removed burrs and sharp edge.
4. For MINI / 297 autofuse / ATM series or equivalent.
5. Temperature rating: -50°C to +145°C.
6. Suitable rated current: 20A@500VAC.
7. Fully insulated clips to protect fuses against shorting.
8. Withstands shock and vibration.
9. Packing: 1000PCS/bag.

DONGGUAN TIANRUI ELECTRONICS CO.,LTD.

RoHS COMPLIANT

UNLESS OTHERWISE STATED

AUTO FUSE HOLDER

WALL THICKNESS	MM				
LINEAR	.XX	±0.15	MM		
	.XXX	±0.05	MM		
ANGULAR		±0.5	DEG	DSGN	JOHN
DRAFT ANGLE/SIDE		0.5	*MAX	16-11-26	SCALE
BURR & FLASH		0.10	MAX		free
BREAK CORNERS		0.20	R.MAX		SHEET
PARTING LINE MISMATCH		0.05	MAX		1 OF 1
				CHKD	PART NO.
				APPD	REV
				SL-506B	
				A	