


SMS27 Series Datasheet

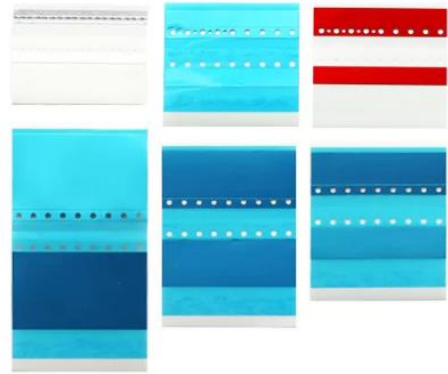

Product Name:	Material:	Adhesive:
SMS27 Series	PET	Acrylic
Size:	Color:	Peeling-off Force:
4mm, 8mm, 12mm, 16mm, 24mm, 32mm, 44mm, 56mm, 72mm, 88mm	Red, silver	(N/25mm) By Angle Of 180 Degree ≥ 15

Professional metal silver SMT splice tape for Fuji NXT Siemens Machine

SMS-27xxC series splice tape are used for jointing carrier tapes in the SMT process. This splice tape is used for jointing carrier tapes in the SMT process, It is made of 2 silver tapes and release paper, and the tape is made by our produced patent material with superior adhesion.

Features And Benefits:

1. Holes alignment for precise jointing.
2. Sense by metal or color, Ideal for Siemens, Fuji Machine.
3. Available for 8mm, 12mm, 16mm, 24mm, etc carrier tapes.
4. Applicable for Fuji NXT, Siemens machine.

How to use:

Ideal application environment: 20-28°C, after sticking it onto carrier tapes, press it tightly at different locations on carrier tapes. This product is not proposed to be used as SMT cover tape extenders when SMT machine starts working.

Storage Condition:

Temperature: 20°C-30°C
Relative Humidity(RH): 45%-65%
Shelf-life: One year

Notes:

Please be advised that this technical data sheet is written based on our lab tests and experience only. Customer is responsible to determine the suitability of the product meets intended application requirements before approved for use.

Tags:

[Black SMT Splice Tape](#), [SMT Splicing Tape](#), [SMT Splice Tape](#)

Application:

SMS-27XXMC series splice tape are used in jointing carrier tapes for Siemens,Fuji machine, whose sensor detects by metal or color.

Properties:

P/N	Size	Carrier Tape	Qty/Box
SMS2708C	(4.8/7.6)x36mm	8mm	500pcs/box
SMS2712C	(11.6/8.8)x36mm	12mm	500pcs/box
SMS2716C	(15.6/12.8)x36mm	16mm	500pcs/box
SMS2724C	(23.6/20.8)x36mm	24mm	250pcs/box

Technical Data:

No	Item	Test Data
1	Peeling-off force (N/25mm) by angle of 180 degree	≥15
2	Retaining (H/25*25mm) hours	> 8
3	Tensile strength at break (N/25mm)	> 2.5

Structure: