

Product Specification

Number: L-KLS3-MT-09*5.5-5V
Name: Electromagnetic Passive
Buzzer
Specification: _____
Customer: A05
Date: 2023-12-01

Customer Signature:



NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.

Compile	Check	Review	Approval
Jenny	Jack.C		

NINGBO KLS ELECTRONIC CO; LTD

1.适用范围：本规范适用于L-KLS3-MT-09*5.5-5V蜂鸣器。

This specifications apply the L-KLS3-MT-09*5.5-5V buzzer.

2.基本规格/General specification

项目/Item	规格/Spec	条件/Condition
1 额定电压 Rated voltage	5VAC	
2 工作电压 Operation voltage	3-7VAC	
3 声压 Sound Pressure Level=SPL	Min 85dB	测试环境：标准状态，标准驱动电路， 额定电压 测试距离：0.1m Standard State,Standard Drive Circuit. Rated voltage,Distance at 0.1m
4 平均消费电流 Average consumption current	Max 60mA	
5 振荡频率 Oscillation frequency	2731Hz	
6 阻抗 Resistance	42±3Ω	
7 工作温度范围 Range of operation temperature	-20+70℃	声压 ≥80dB SPL ≥80dB
8 保存温度范围 Range of preservation temperature	-30+85℃	
9 端子强度 Terminal strength	10N	拉负荷方向的终端轴 Pull load on the direction of the terminal axis
10 外部尺寸 Externals size	Φ9*5.5	参阅附图 Refer to the attached drawing
11 重量 Mass	1g	

☆标准状态：常温（15~35℃），湿度（25~85%相对湿度），空气压力（860~1060hpa）
在假设的情况判断，测试是一基本状态下进行。

Standard State:Ordinary Temp(15~35℃),Humidity(25~85%RH),Air pressure(860~1060hPa)



In case of doubtful judgment,the test is re—performed under Basic State.

☆基本情况：温度。（20±2℃），湿度（60~70%相对湿度），空气压力（860~1060hpa）

Basic State: Temp.(20±2℃),Humidity(60~70%RH),Air pressure(860~1060hPa)



<标准驱动电路>/<Standard Drive Circuit>

<标准测试治具>/<Standard Test Fixture>

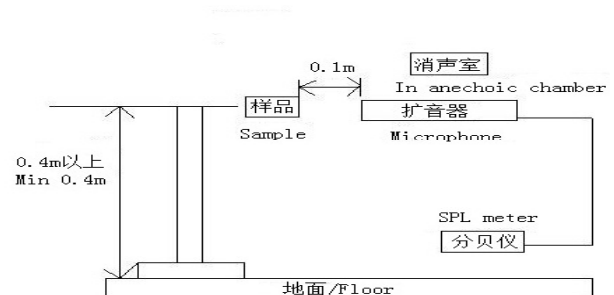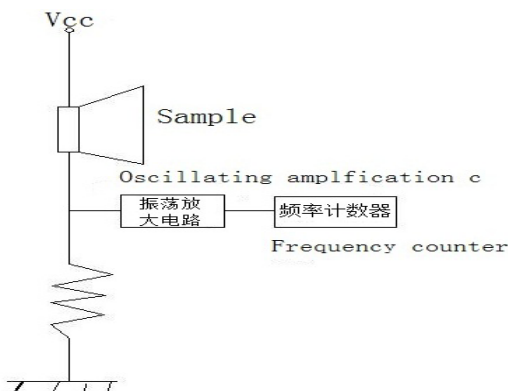

NINGBO KLS ELECTRONIC CO; LTD

3.可靠性规范/Reliability specification

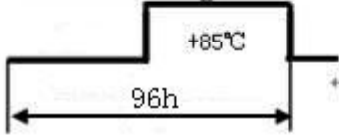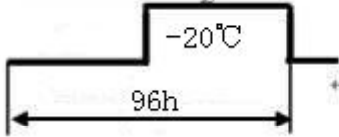项目/Item		试验条件/Test condition	判断标准/Criteria	引用规格
1	高温保存试验 High temperature Preservation	+85°C环境下放置24小时 Exposure to +85°C for 24 hrs.	经过测试,符合规格,没有任何不合格的外观和性能 After the test the part shall meet specifications without any degradation.	
2	低温保存试验 Low temperature preservation	-20°C环境下放置24小时 Exposure to -40°C for 24 hrs.		
3	高温试验 High temperature Shock			
4	低温试验 Low temperature Shock			
5	常温寿命试验 Ordinary Temp. Life	常温 (25°C±10°C) 电压5vAC连续测试48小时 Driving the sounder at 5vAC for 48hrs in the room temperature (25°C±10°C)		
6	高温寿命试验 High Temp. Life	高温 (+85°C) 电压5VAC连续测试2小时 Driving the sounder at 5VAC for 2hrs in the low temperature (+85°C)		
7	低温寿命试验 Low Temp. Life	低温 (-20°C) 电压5VAC连续测试2小时 Driving the sounder at 5VAC for 2hrs in the low temperature (-20°C)		
8	端子拉力试验 Lead strength	10N的拉力在端子上拉10±1秒 Pull load on the direction of the terminal axis for 10±1 sec.		
9	跌落试验 Free drop	70cm高自由掉落到厚40mm的木板上, 每个方向一次 Free drop, 70cm height, on wood board (t40mm) X, Y, Z 3Direction 1time each, total 3times.		排除弯曲的针 Exclude bending of Pin
10	端子可焊性试验 Solderability	260±5°C焊接温度。时间: 5±0.5sec。 Soldering into solderbath: Solder Temp. 260±5°C Soaking Time: 5±0.5sec	端子95%必须覆盖着焊料 95% surface of lead pins must be covered with fresh solder and no soldering holes should be found	

NINGBO KLS ELECTRONIC CO; LTD

