

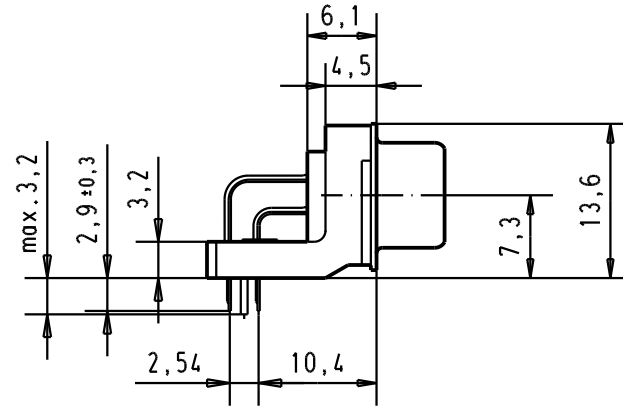
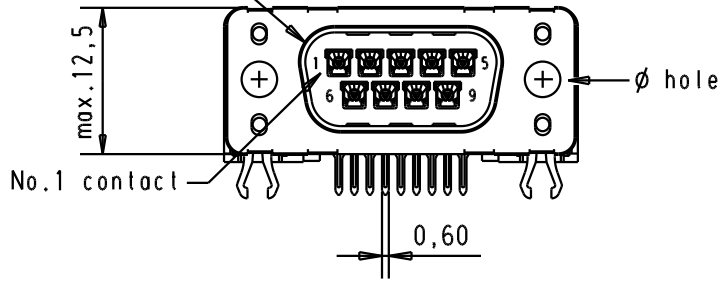


5 4 3 2 1


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

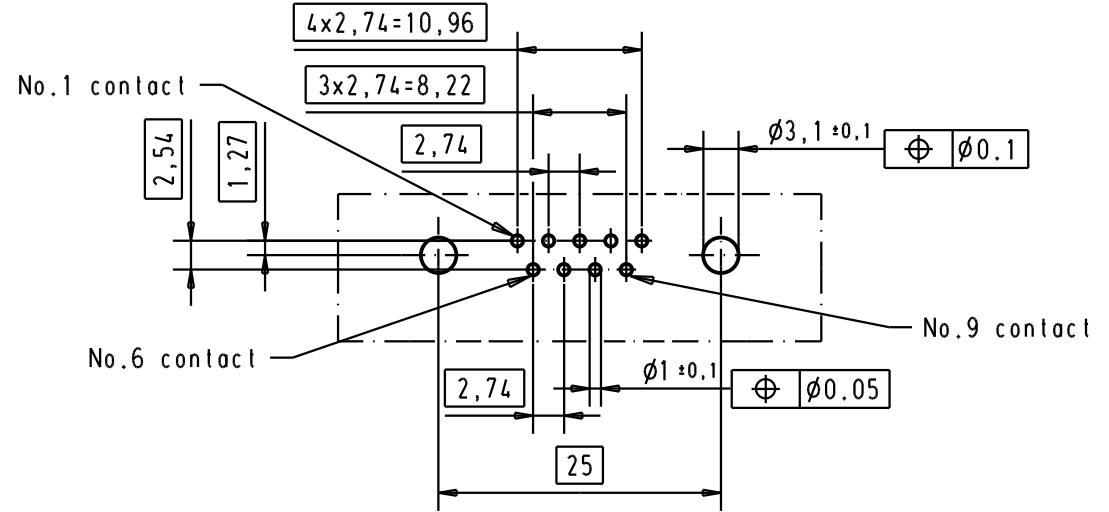

Printed board layout component side

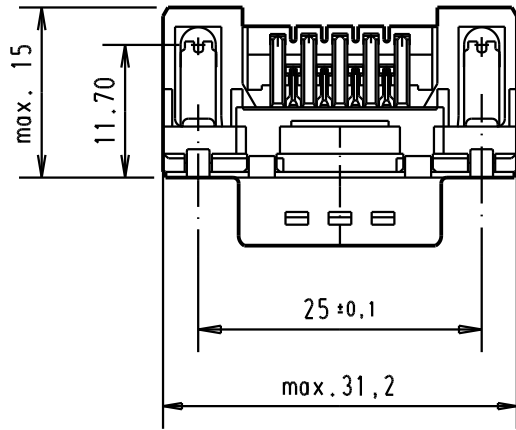

Connector retention and insertion forces on the PCB = 25 / 80 newtons

						Detail.		Name		Moßstab/Scale	
						05/03/02		CV		1.5:1	
						Insp.				Orig. Size DIN A 4	
						Stand.				Blatt/ Page	
09 65 166 3810		3.1 ± 0.1	1					D-Sub, high temperature, male, standard, 09 poles, with solder pins 2.9, holes and grounding board lock		2	
09 65 166 6810		3.1 ± 0.1	2	31892	22/04/04	JH				TB 0965166x81x	
09 65 166 7810		3.1 ± 0.1	3	29723	05/03/02	CV					
Part number		φ hole	Performance level	Mod.	Dat.	Name		HARTING EURL F-95972 Paris		Sub.	