

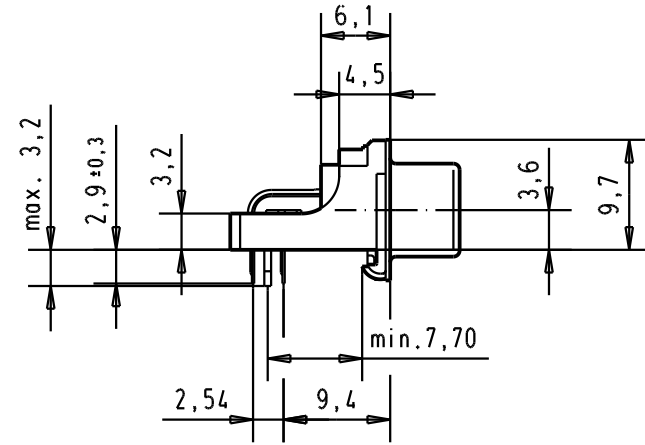
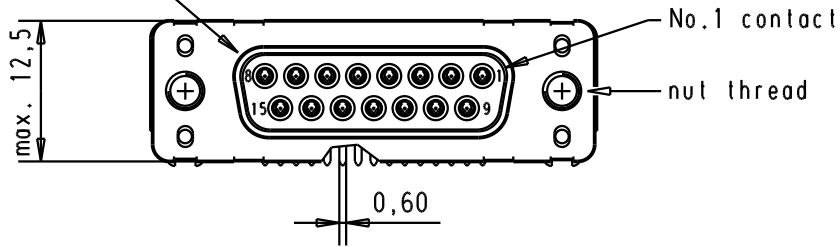


5 4 3 2 1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

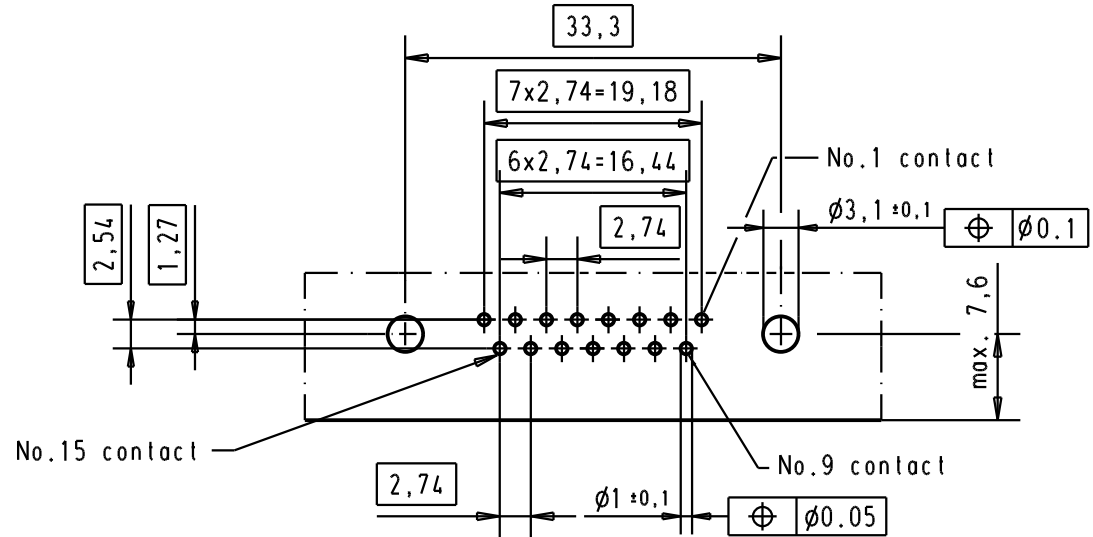

Printed board layout component side

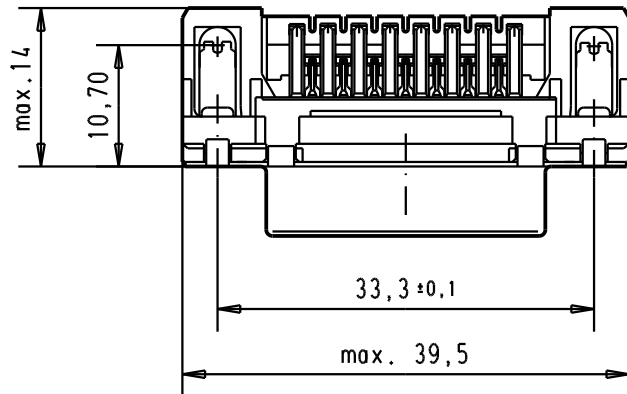

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A	09 66 256 3615	M 3	1							<p>All Dim. in mm Orig. Size DIN A 4</p>	D-Sub, high temperature, female, low profil, 15 poles with solder pins 2.9 with nuts and grounding board lock.	Maßstab/ Scale 1.5:1			
	09 66 256 6615	M 3	2				Detail.	05/03/02	CV						
	09 66 256 7615	M 3	3				Insp.								
	09 66 256 3616	4-40 UNC	1				Stand.								
	09 66 256 6616	4-40 UNC	2	31892	05/05/04	JH	HARTING EURL F-95972 Paris							TB 0966256x61x	Blatt/ Page 2
	09 66 256 7616	4-40 UNC	3	29723	05/03/02	CV									
	Part number	Nut thread	Performance level	Mod.	Dat.	Name				Sub.					