

5



4

3



2

1

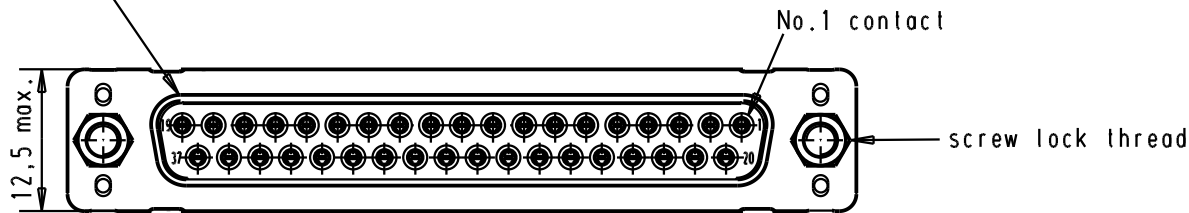

Mating face according to : MIL-C24308 / DIN 41652 / CECC 75301-802

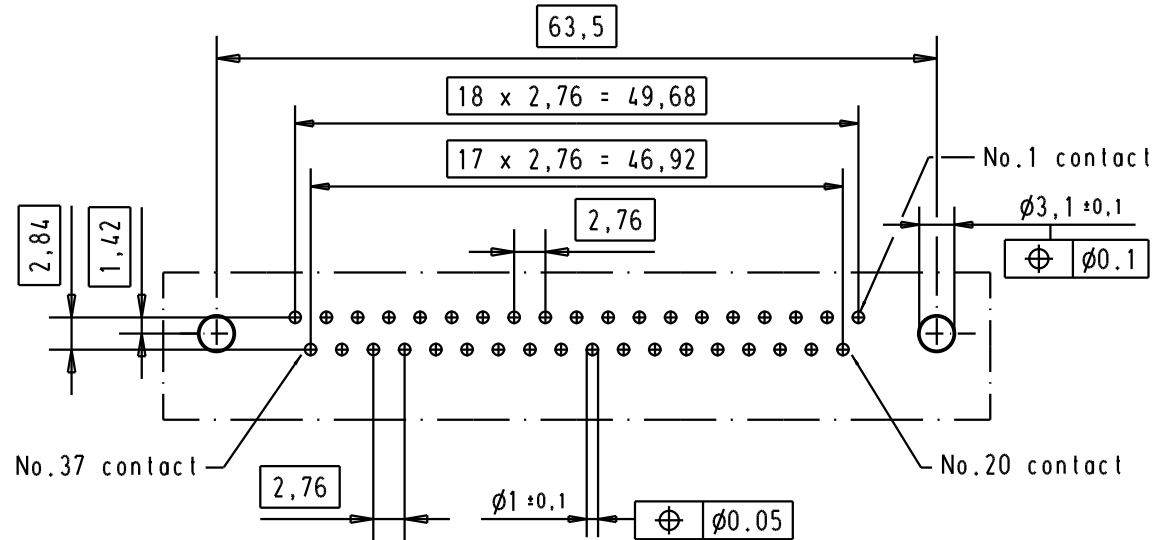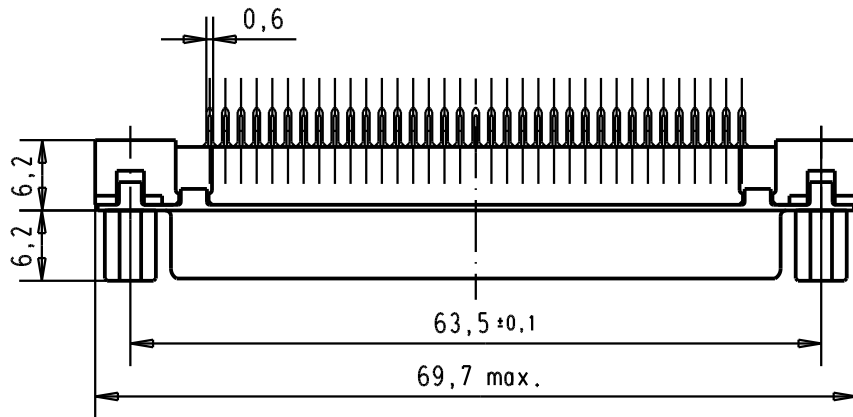

Printed board layout  
component side



A

Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	Detail.	Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-sub, High temperature, 37 poles, female, straight, with solder pins 2.9, and screw lock.	Maßstab/ Scale  1,5:1
09 66 415 3503	4-40 UNC	1				05/03/02	CV				
09 66 415 6503	4-40 UNC	2	31892	05/05/04	JH						
09 66 415 7503	4-40 UNC	3	29723	05/03/02	CV						
						HARTING EURL F-95972 Paris				TB 09 66 415 x50x	Blatt/ Page 3