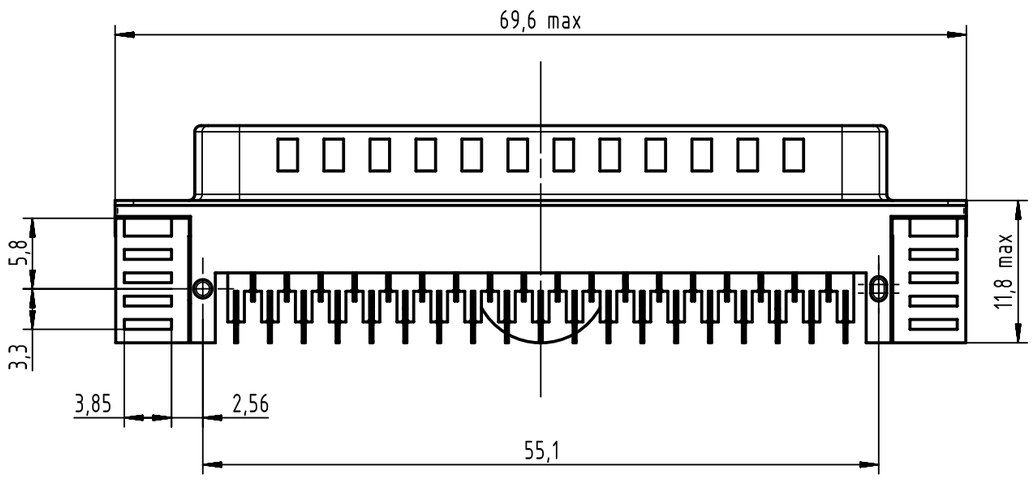

PCB layout, mounting side (thickness 1,6 min)

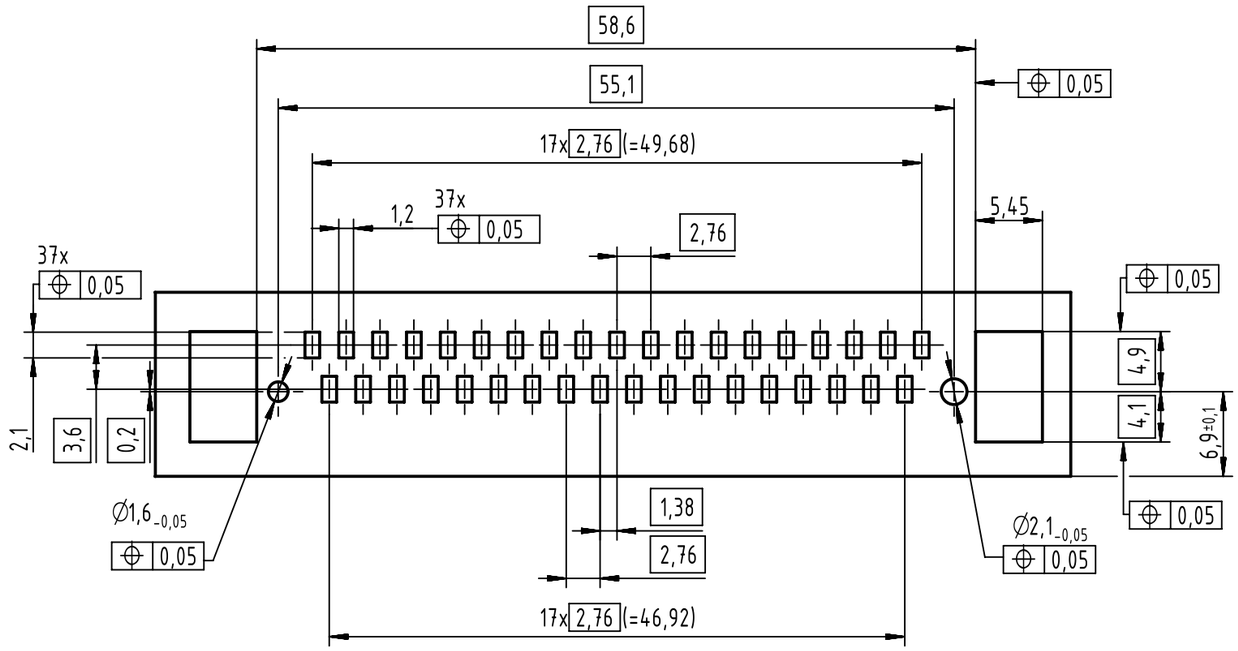

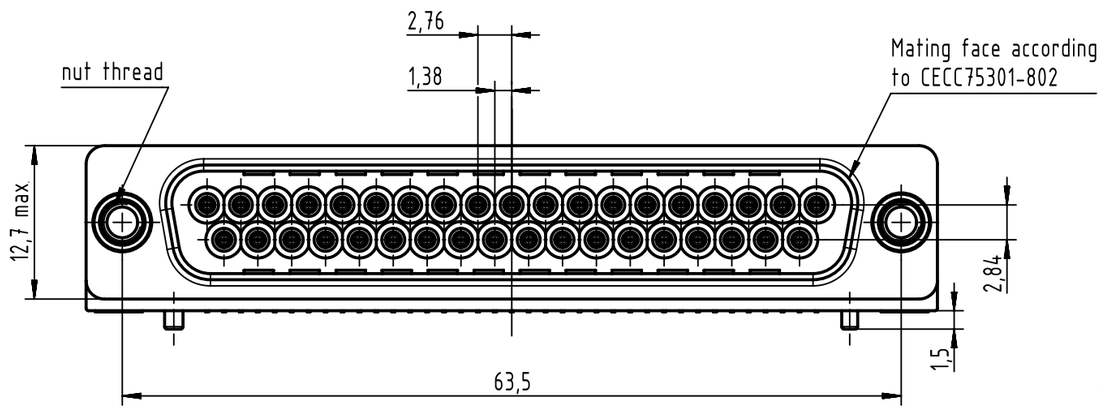

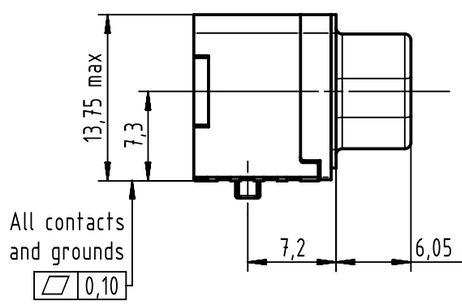





0955 466 6812 333	2	4-40 UNC	Black insulator	Samples
0955 466 3812 741	1	4-40 UNC	Black insulator	Reel Packaging (140 connectors)
0955 466 6812 741	2			
0955 466 7812 741	3			
0955 466 3811 741	1	M3		
0955 466 6811 741	2			
0955 466 7811 741	3			
Part number	PL	Thread	Index designation	

Max. temperatue :260°C during 10 seconds
Find further technical information on DS 09550200301

All Dimensions in mm
Original Size DIN A3

Scale 2:1

Free size tol.

Ref.

Sub.

All rights reserved

Department EC PD - CN

HARTING Electronics GmbH
D-32339 Espelkamp

Created by	Inspected by	Standardisation	Date	State
ZHUANGJ	LUOK	HOFFMANN	2016-08-31	Final Release

Title: D-Sub angled STD 37-pole male with screw nut

Doc-Key / ECM-Nr.: 100587484/UGD/002/A 500000107532

Type: TB

Number: 0955466X81X

Rev.: A

Page: 1/1

A3