


SPECIFICATIONS






Current Rating: 1A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-2

ORDER INFORMATION

5 H 2 0 0 0 N X - 2 X X B B L 0 0 D 0 1



No. of contacts	Dimensions	
	Dim.A	Dim.B
202	2.00	4.20
203	4.00	6.20
204	6.00	8.20
205	8.00	10.20
206	10.00	12.20
207	12.00	14.20
208	14.00	16.20
209	16.00	18.20
210	18.00	20.20
211	20.00	22.20
212	22.00	24.20
213	24.00	26.20
214	26.00	28.20
215	28.00	30.20
216	30.00	32.20
217	32.00	34.20
218	34.00	36.20
219	36.00	38.20
220	38.00	40.20
221	40.00	42.20
222	42.00	44.20
223	44.00	46.20
224	46.00	48.20
225	48.00	50.20
230	58.00	60.20
240	78.00	80.20

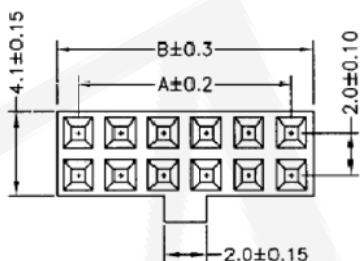

5H2000N1

5H2000N0

Old Part No.:2000H-2XXBX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.0mm HOUSING			頁數 Page	1/1
	品號 PART NO.	5H2000NX-2XXBBL00D01			繪圖 DRAWN	Jeff 2016/10/21
	圖號 DRAWING NO.	版本 REV.	A	核對 CHECKED	Johnny 2016/10/21	
	客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	Aaron 2016/10/21	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	