
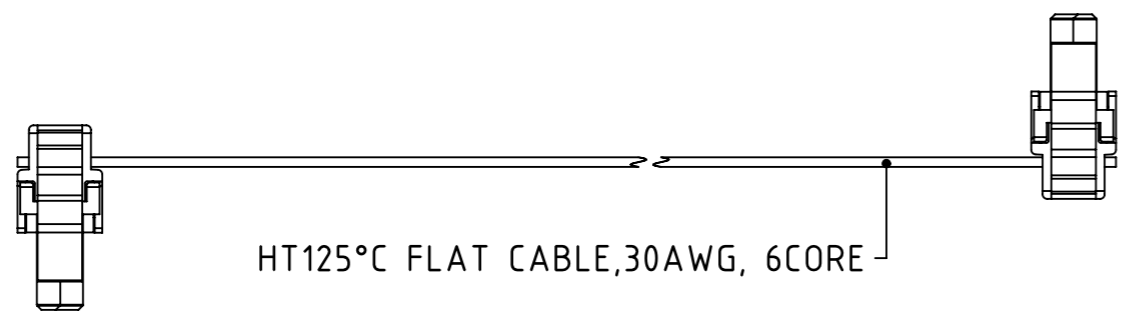
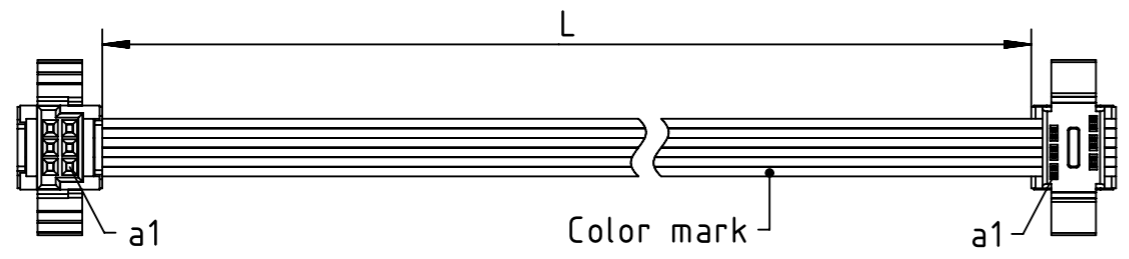


Option 8
1:1 wiring
CRZ 2436

Technical Specification	
Poles	6
Pitch	1.27mm
Cable diameter	AWG 30/7
Cable insulation	TPE
Compliant	RoHS
Flame retardant	Cable: UL 758: VW-1 Connector: UL 94: V-0

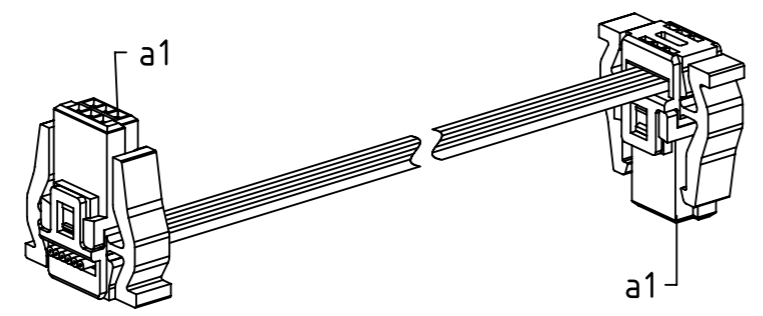

HAR-FLEX 6 POLE FEMALE CONNECTOR
WITHOUT STRAIN RELIEF

HAR-FLEX 6 POLE FEMALE CONNECTOR
WITHOUT STRAIN RELIEF

HARTING P/N	Length(L)
33152441000471	100
33152442000471	200
33152445000471	500

	All rights reserved Department HCS - CN	Tech. Character.		Free size tol.		According to production drawing HWN 401.01.36	
		Created by LIN Lin	Inspected by 406950 Xiang	Standardisation 406950 Xiang	Date 2023-12-25	State Final Release	
HARTING Customised Solutions D-32339 Espelkamp		Title har-flex, 6p, 2end w/o SR, TPE, L=xxM				Doc-Key / ECM-Nr. 101072585/UGD/000/A 500000260870	
		Type TB	Number 3315244XXX0471			Rev. A	Page 1/1