



## Power Relay F

TE Internal #: 9-1393303-7

Maxi Relays, 24VDC Coil Voltage Rating, &gt;50A Contact Current Class, Socket, Monostable, 324Ω Coil Resistance, Power Relay F

[View on TE.com >](#)

Relays &amp; Contactors &gt; Relays &gt; Automotive Relays &gt; Automotive Plug-In Relays &gt; Maxi Relays

Coil Voltage Rating: **24 VDC**Contact Current Class: **>50 A**Product Mount Type: **Socket**Coil Magnetic System: **Monostable**Coil Resistance: **324 Ω**

## Features

## Configuration Features

Contact Arrangement	1 Form A (NO)
---------------------	---------------

## Electrical Characteristics

Contact Limiting Short-Time Current	300 A
Contact Limiting Continuous Current	70 A
Current Rating (85°C)	25 A
Insulation Initial Dielectric Between Open Contacts	500 Vrms
Contact Limiting Making Current	240 A
Insulation Initial Dielectric Between Contacts & Coil	500 Vrms
Contact Limiting Breaking Current	25 A
Contact Voltage Rating	24 VDC
Contact Switching Load (Min)	1000mA @ 5VDC
Coil Power Rating DC	1800 mW
Coil Voltage Rating	24 VDC
Coil Resistance	324 Ω

## Body Features

Product Weight	38 g[1.3 oz]
----------------	--------------

## Contact Features

Contact Material	Silver Alloy
------------------	--------------

## Termination Features



Relay Connection Type	Plug-In
-----------------------	---------

Terminal Configuration	Quick Connect Terminals
------------------------	-------------------------

### Mechanical Attachment

Product Mount Type	Socket
--------------------	--------

### Dimensions

Product Width	25.9 mm[1.019 in]
---------------	-------------------

Product Length	25.9 mm[1.019 in]
----------------	-------------------

Product Height	24.9 mm[.98 in]
----------------	-----------------

### Usage Conditions

Environmental Ambient Temperature (Max)	125 °C[257 °F]
---	----------------

### Operation/Application

Actuating System	DC
------------------	----

Coil Magnetic System	Monostable
----------------------	------------

### Other

Length Class (Mechanical)	25 – 30 mm
---------------------------	------------

Environmental Ambient Temperature Class	105 – 125 °C
---	--------------

Insulation Initial Dielectric Between Coil & Contact Class	0 – 500 V
--	-----------

Height Class (Mechanical)	20 – 25 mm
---------------------------	------------

Coil Power Rating Class	1500 mW
-------------------------	---------

Width Class (Mechanical)	25 – 30 mm
--------------------------	------------

Contact Current Class	>50 A
-----------------------	-------

### Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
--	---

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC
-----------------	--



Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # 2141026-1  
RELAY BOX ASSY,HARD WIRED

### Also in the Series | Power Relay F



Maxi Relays(13)



Mini Relays(43)

### Customers Also Bought



TE Part #DRB16-48SBE-L018  
PLG, 48P, BLK, E, CAP, B






TE Part #1625887-2  
2W STD M/OX 2% 82R



TE Part #2176372-2  
RQ 0603 51K1 0.1% 10PPM 5K RL



TE Part #927829-2  
SPT REC 6.3 Contact SRC Sn

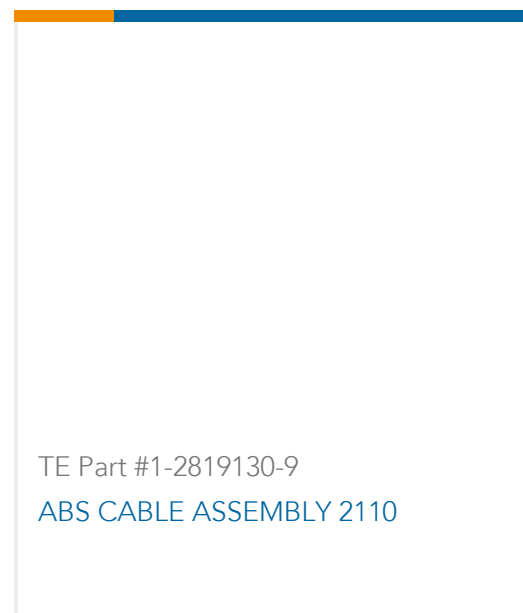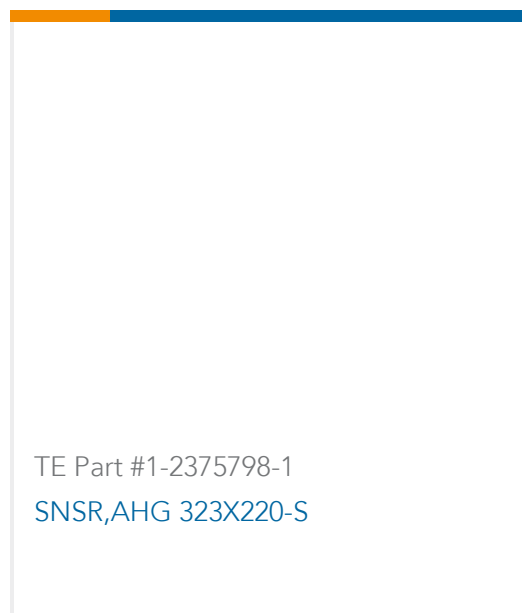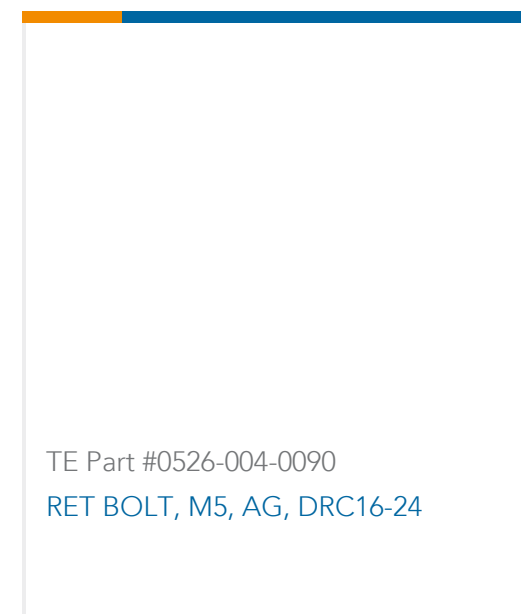

## Documents

### CAD Files

#### 3D PDF

English

#### Customer View Model

[ENG\\_CVM\\_9-1393303-7\\_S00F.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_9-1393303-7\\_S00F.3d\\_stp.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_9-1393303-7\\_S00F.2d\\_dxf.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

### Datasheets & Catalog Pages

#### MFINITY Version AUT

English

#### Automotive Relay Application Notes

English

#### MFINITY Modular Hard Wired Fuse and Relay Box

English

### Product Specifications

#### Definitions General Purpose Relays

English