



## HS-8133-HS-8165

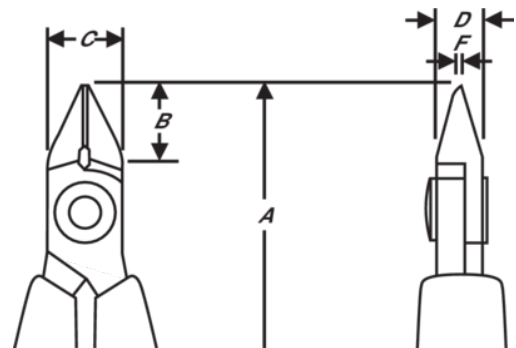
### Long Precision Diagonal Cutters with Tapered Head & ESD Safe Handle



#### PRODUCT DETAILS







- Long, foam covered handles provide added leverage, an ergonomic grip, and reduced fatigue
- HS handle option can be applied to any standard 80 Series cutters or Supreme Series cutters and pliers

- All HS cutters and pliers are ESD safe, using static dissipative foam grips over conductive spring holders









# PRODUCT ATTRIBUTES







## Product: HS-8133

	Tapered		XS	<b>A</b>	140.3 mm
<b>A</b>	5.52 in	<b>B</b>	8 mm	<b>B</b>	0.31 in
<b>C</b>	8 mm	<b>C</b>	0.31 in	<b>D</b>	5 mm
<b>D</b>	0.2 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.2-1.0 mm		0.008-0.04 in		Micro-Bevel®
<b>g</b>	91 g		Dissipative		







## Product: HS-8134

	Tapered		XS	<b>A</b>	140.3 mm
<b>A</b>	5.52 in	<b>B</b>	8 mm	<b>B</b>	0.31 in
<b>C</b>	8 mm	<b>C</b>	0.31 in	<b>D</b>	5 mm
<b>D</b>	0.2 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.1-0.8 mm		0.004-0.03 in		Flush
<b>g</b>	91 g		Dissipative		







## Product: HS-8135

	Tapered		XS	<b>A</b>	140.3 mm
<b>A</b>	5.52 in	<b>B</b>	8 mm	<b>B</b>	0.31 in
<b>C</b>	8 mm	<b>C</b>	0.31 in	<b>D</b>	5 mm
<b>D</b>	0.2 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.1-0.5 mm		0.00-0.02 in		Ultra-Flush®
<b>g</b>	91 g		Dissipative		







## Product: HS-8143

	Tapered		S	<b>A</b>	5.60 mm
<b>A</b>	142.3 in	<b>B</b>	10 mm	<b>B</b>	0.39 in
<b>C</b>	10 mm	<b>C</b>	0.39 in	<b>D</b>	6 mm
<b>D</b>	0.24 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.2-1.25 mm		0.01-0.05 in		Micro-Bevel®
<b>g</b>	91 g		Dissipative		







## Product: HS-8144

	Tapered		S	<b>A</b>	5.60 mm
<b>A</b>	142.3 in	<b>B</b>	10 mm	<b>B</b>	0.39 in
<b>C</b>	10 mm	<b>C</b>	0.39 in	<b>D</b>	6 mm
<b>D</b>	0.24 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.2-1.25 mm		0.01-0.05 in		Flush
<b>g</b>	91 g		Dissipative		







## Product: HS-8145

	Tapered		S	<b>A</b>	5.60 mm
<b>A</b>	142.3 in	<b>B</b>	10 mm	<b>B</b>	0.39 in
<b>C</b>	10 mm	<b>C</b>	0.39 in	<b>D</b>	6 mm
<b>D</b>	0.24 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.1-1.0 mm		0.01-0.04 in		Ultra-Flush®
<b>g</b>	91 g		Dissipative		

## Product: HS-8163

	Tapered		L	<b>A</b>	157.3 mm
<b>A</b>	6.19 in	<b>B</b>	16 mm	<b>B</b>	0.63 in
<b>C</b>	16 mm	<b>C</b>	0.63 in	<b>D</b>	8 mm
<b>D</b>	0.31 inch	<b>F</b>	1.6 mm	<b>F</b>	0.06 in
	0.3-2.0 mm		0.01-0.08 in		Micro-Bevel®
<b>g</b>	136 g		Dissipative		

## Product: HS8164

	Tapered		L	<b>A</b>	157.3 mm
<b>A</b>	6.19 in	<b>B</b>	16 mm	<b>B</b>	0.63 in
<b>C</b>	16 mm	<b>C</b>	0.63 in	<b>D</b>	8 mm
<b>D</b>	0.31 inch	<b>F</b>	1.6 mm	<b>F</b>	0.06 in
	0.3-2.0 mm		0.01-0.08 in		Flush
<b>g</b>	136 g		Dissipative		