




**CO8130-CO8162**  
**Precision Diagonal Cutters with**  
**Oval Head & ESD Safe Handle**







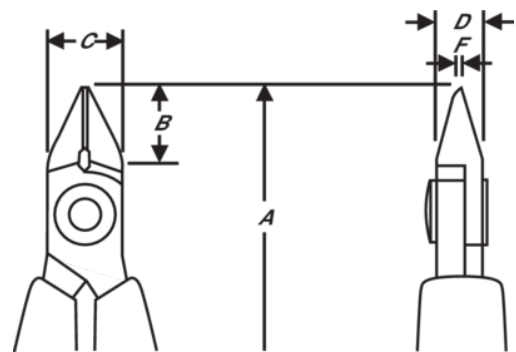


**PRODUCT DETAILS**

- Ideal for wire harness work and standard printed circuit board assembly
- High performance alloy steel
- Exacting induction hardened cutting edges 63–65 HRC
- ESD safe mono material handles in synthetic material with leaf springs
- Precision screw joint that minimizes friction and maximizes alignment of cutting edges
- Cutting capacity is listed for solid copper wire
- Phosphated finish










PRODUCT ATTRIBUTES








Product: **CO8131**

	Oval		XS	<b>A</b>	108.0 mm
<b>A</b>	4.25 in	<b>B</b>	8.5 mm	<b>B</b>	0.33 in
<b>C</b>	8 mm	<b>C</b>	0.31 in	<b>D</b>	5 mm
<b>D</b>	0.2 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.1-1.0 mm		0.00-0.04 in		Flush
	43 g		Conductive		








Product: **CO8141**

	Oval		S	<b>A</b>	110.0 mm
<b>A</b>	4.33 in	<b>B</b>	1.5 mm	<b>B</b>	0.41 in
<b>C</b>	10 mm	<b>C</b>	0.39 in	<b>D</b>	6 mm
<b>D</b>	0.24 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.1-1.25 mm		0.00-0.05 in		Flush
	45 g		Conductive		








Product: **CO8142**

	Oval		S	<b>A</b>	110.0 mm
<b>A</b>	4.33 in	<b>B</b>	10.5 mm	<b>B</b>	0.41 in
<b>C</b>	10 mm	<b>C</b>	0.39 in	<b>D</b>	6 mm
<b>D</b>	0.24 inch	<b>F</b>	0.8 mm	<b>F</b>	0.03 in
	0.1-1.0 mm		0.00-0.04 in		Ultra-Flush <sup>®</sup>
	46 g		Conductive		








Product: **CO8150**

	Oval		M	<b>A</b>	112.5 mm
<b>A</b>	4.43 in	<b>B</b>	13 mm	<b>B</b>	0.51 in
<b>C</b>	12.5 mm	<b>C</b>	0.50 in	<b>D</b>	6 mm
<b>D</b>	0.24 inch	<b>F</b>	1.2 mm	<b>F</b>	0.05 in
	0.3-1.6 mm		0.01-0.06 in		Micro-Bevel <sup>®</sup>
	50 g		Conductive		

Product: **CO8151**

	Oval		M	<b>A</b>	112.5 mm
<b>A</b>	4.43 in	<b>B</b>	12.5 mm	<b>B</b>	0.5 in
<b>C</b>	12.5 mm	<b>C</b>	0.50 in	<b>D</b>	6 mm
<b>D</b>	0.24 inch	<b>F</b>	1.2 mm	<b>F</b>	0.05 in
	0.2-1.6 mm		0.01-0.06 in		Flush
	49 g		Conductive		

Product: **CO8161**

	Oval		L	<b>A</b>	125.0 mm
<b>A</b>	4.92 in	<b>B</b>	16 mm	<b>B</b>	0.63 in
<b>C</b>	16 mm	<b>C</b>	0.63 in	<b>D</b>	8 mm
<b>D</b>	0.31 inch	<b>F</b>	1.6 mm	<b>F</b>	0.06 in
	0.3-2.0 mm		0.01-0.08 in		Flush
	88 g		Conductive		