


SPECIFICATION

OPERATION FORCE: 1000GF MAX. △△
 OPERATION TEMPERATURE: -40°C ~ +85°C △
 MECHANICAL LIFE: 5000 CYCLES △
 ELECTRICAL LIFE: 3000 CYCLES △



ORDER INFORMATION

6 4 S W T - A X X X X X X



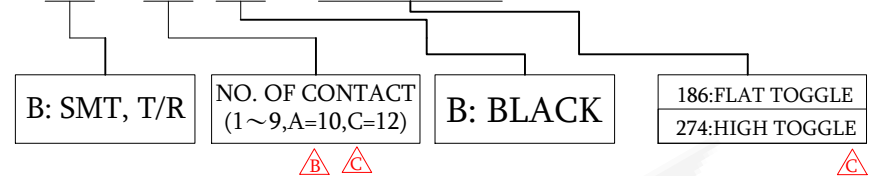


PART NAME	MATERIAL	FINISHED
COVER	THERMOPLASTIC	BLACK
BASE	THERMOPLASTIC	BLACK
ACTUATOR	THERMOPLASTIC	WHITE
TERMINAL CONTACT	PHOSPHOR BRONZE	GOLD PLATED


SCHEMATIC(TYP.)

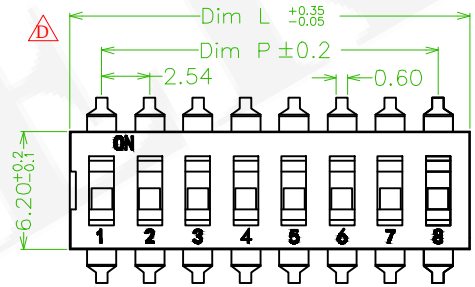

	Dim P	Dim L
01P	-	3.34
02P	2.54	5.88
03P	5.08	8.42
04P	7.62	10.96
05P	10.16	13.50
06P	12.70	16.04
07P	15.24	18.58
08P	17.78	21.12
09P	20.32	23.66
10P	22.86	26.20
12P	27.94	31.28

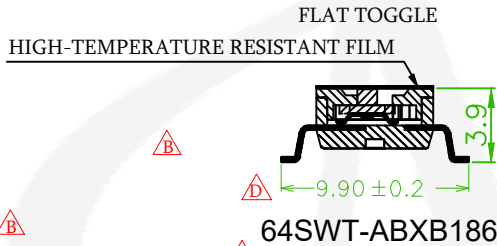

Recommended PCB Layout (PCB TOLERANCE ±0.05)

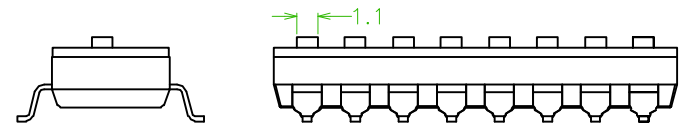

<p>糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	DIP SWITCH			頁數 Page	1/1
	品號 PART NO.	64SWT-AXXXXXX			繪圖 DRAWN	Eloise 2017/06/29
	圖號 DRAWING NO.	GN114-EL534	版本 REV.	D	核對 CHECKED	Carol 2017/06/29
	客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Jason 2017/06/29
	公差 TOLERANCE	.X ±0.3 .XX ±0.1	X° ±5°	單位 UNIT	mm	THIRD ANGLE PROJECTION

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△	ECN NO.:241020 Revise the drawing	Gaby	2024/11/01
△	ECN NO.:240210 Revise the drawing	Gaby	2024/03/14
△	ECN NO.:231030 Revise the drawing	Alice	2023/11/09