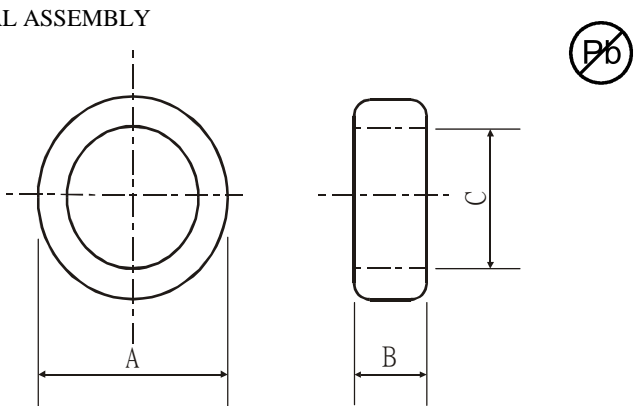



SPECIFICATION FOR APPROVAL

CUSTOMER:			CUSTOMER'S PART NAME				
DESCRIPTION: T130-26A			DATE: 2015/3/4				
(1).MECHANICAL ASSEMBLY 			A	33.0 ± 0.6	m/m		
			B	5.72 ± 0.7	m/m		
			C	19.8 ± 0.6	m/m		
1ST COLOR		2ND COLOR		3RD COLOR		4 TH COLOR	
(2)ELECTRICAL REQUIREMENTS				(3) SCHEMATIC			
AL	41.0 nH/N ²	TEST FREQUENCY	10KHZ/0.2V				
L	16.4±10% uH	TEST FREQUENCY					
ui	75	TEST FREQUENCY					
Q		TEST FREQUENCY					
		TEST FREQUENCY					
(4)TEST INSTRUMENTS							
<input type="checkbox"/> HP 4192A LF IMPEDANCE ANALYZER <input type="checkbox"/> HP 4260A UNIVERSAL BRIDGE <input checked="" type="checkbox"/> WK3260A <input type="checkbox"/> DELICA HAM 310 GRID-DIP METER <input type="checkbox"/> DMC-230 DIGITAL DIP METER <input type="checkbox"/> DMC-470 DIGITAL DIP METER <input type="checkbox"/> DIGITAL MULTIMETER SC-7401				<input type="checkbox"/> HP 4815A RF VECTOR IMPEDANCE METER <input type="checkbox"/> Agilent42841A Bias Current Source <input type="checkbox"/> HP 5382A FREQUENCY COUNTER <input type="checkbox"/> HP-16092A BINDING POST FIXTURE <input type="checkbox"/> TEXSCAN 9900B SWEEP SYSTEM ANALYZER <input type="checkbox"/> HP 4193 A RF IMPEDANCE ANALYZER <input type="checkbox"/> HP 4338 A MILLIOHMMETER			
REVISION	DRAWN BY CHECKED BY	MAT'L	SPEC.		APPROVED BY		
		CORE			CHECKED BY		
		TEST WIRE	0.3mm φ2UEW		DRAWN BY		
		TEST WINDING					

EROCORE ENTERPRISE CO., LTD.

TEST DATA

CUSTOMER		DATE	2015/3/4				
DESCRIPTION	T130-26A	QUANTITY					
TEST ITEM	AL (uH)						
SPEC YOUR							
SPEC SUGGEST	16.4 ± 10%						
TEST FREQ.	10KHZ/0.2V						
1	16.32						
2	16.30						
3	16.25						
4	16.28						
5	16.41						
6	16.40						
7	16.25						
8	16.31						
9	16.33						
10	16.26						
X	16.31						
R	0.16						
YOUR SAMPLE							
TEST CONDITION:			TEMP.	°C	R.H.	%	
APPROVED BY Elsa		CHECKED BY			DRAWN BY		
					