

HFE 10

MINIATURE HIGH POWER LATCHING RELAY



File No.:40035869



File No.:E134517



Features

- 50A switching capacity
- Lamp load up to 5000W
- Motor load up to 5HP
- Max. inrush current 500A/2ms
- Dielectric strength: more than 4kV (between coil and contacts)
- Manual switch function available
- 1.5mm contact gap available

RoHS compliant

CONTACT DATA

Contact arrangement	1A, 1B, 1C
Contact resistance ¹⁾	20mΩ max.(at 1A 24VDC)
Contact material	AgSnO ₂
Contact rating	1A, 1B: 50A 277VAC, 1 x 10 ⁶ OPS (Resistive) 5000W 240VAC, 3 x 10 ⁴ OPS (Incandescent lamp) 16A 277VAC, 6000 OPS (Electronic ballast) 5HP 277VAC, 3 x 10 ⁴ OPS (Motor) 1C: 40A 277VAC, 3 x 10 ⁴ OPS (Resistive)
Max. switching voltage	440VAC
Max. switching current	50A
Max. switching power	1A: 12500VA / 1C: 10000VA
Max. continuous current	50A
Mechanical endurance	1 x 10 ⁶ OPS
Electrical endurance	See "contact rating"

Notes:1) The data shown above are initial values.

COIL DATA

at 23°C

Nominal Voltage VDC	Set / Reset Voltage VDC ¹⁾	Pulse Duration ms min.	Coil Resistance x (1±10%) Ω
6	≤4.8	≥50	24
9	≤7.2	≥50	54
12	≤9.6	≥50	96
24	≤19.2	≥50	384
48	≤38.4	≥50	1536
6	≤4.8	≥50	12+12
9	≤7.2	≥50	27+27
12	≤9.6	≥50	48+48
24	≤19.2	≥50	192+192
48	≤38.4	≥50	768+768

Notes:1) The data shown above are initial values.

2) The above set voltage, reset voltage are the test value for relay without load. Please use 1~1.5 times of rated voltage to drive the relay for your application.

COIL

Rated power	Single coil latching: Approx. 1.5W Double coils latching: Approx. 3.0W Type W-Single coil latching: Approx. 2.4W Type W-Double coils latching: Approx. 4.8W
-------------	--

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	4000VAC 1min
	Between open contacts	1500VAC 1min
Creepage distance (between input and output side)	1A, 1B: 8mm 1C: 6mm	
Set time (at nomi. volt.)	15ms max.	
Reset time (at nomi. volt.)	15ms max.	
Max. operate frequency	1A, 1B: 20cycles/min 1C: 10cycles/min	
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance	10Hz to 55Hz 1.5mm DA	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 70°C	
Termination	Coil termination	PCB
	Load termination	PCB&QC
Unit weight	Approx. 32g	
Construction	Plastic sealed, Flux proofed	

Notes: The data shown above are initial values.

SAFETY APPROVAL RATINGS

UL/CUL (AgSnO ₂)	1 Form A	Resistive: 50A 277VAC Incandescent lamp: 5000W 240VAC
	1 Form C	40A 277VAC
VDE	1 Form A 1 Form B	Resistive: 50A 277VAC

Notes: 1) All values unspecified are at room temperature.

2) Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY

ISO9001、IATF16949、ISO14001、OHSAS18001、IEC QC 080000 CERTIFIED

2021 Rev.1.00

COIL DATA

23°C

Type W-Single coil latching

Nominal Voltage VDC	Set / Reset Voltage VDC max. ¹⁾	Pulse Duration ms min.	Coil Resistance x (1±10%) Ω
6	≤4.8	≥50	15
9	≤7.2	≥50	33.8
12	≤9.6	≥50	60
24	≤19.2	≥50	240
48	≤38.4	≥50	960

Type W-Double coils latching

Nominal Voltage VDC	Set / Reset Voltage VDC max. ¹⁾	Pulse Duration ms min.	Coil Resistance x (1±10%) Ω
6	≤4.8	≥50	7.5+7.5
9	≤7.2	≥50	16.9+16.9
12	≤9.6	≥50	30+30
24	≤19.2	≥50	120+120
48	≤38.4	≥50	480+480

Notes: 1) The data shown above are initial values.

2) The above set voltage, reset voltage are the test value for relay without load. Please use 1~1.5 times of rated voltage to drive the relay for your application.

3) W-type for special code (W).

ORDERING INFORMATION

	HFE10	-1/	12	-D	1	S	T	-L2	-R	(W)	(XXX)
Type											
Version	1: No auxiliary convexity, no manual switch 2: No auxiliary convexity, with manual switch 3: With auxiliary convexity, no manual switch 4: With auxiliary convexity, with manual switch 5: No auxiliary convexity, with manual switch, the reverse action										
Coil voltage	6, 9, 12, 24, 48VDC										
Contact arrangement	1) H: 1 Form A D: 1 Form B (No UL approval) Z: 1 Form C (Not applicable to HFE10-5) (No VDE approval)										
Termination	1: Extended terminal 5: Wide terminal 2) 6: Extended bending terminal 7: Double PCB terminal Nil: PCB terminal										
Construction	3) S: Plastic sealed (Only for HFE10-1 & HFE10-3) Nil: Flux proofed										
Contact material	T: AgSnO ₂										
Coil type	L1: Single coil latching					L2: Double coils latching					
Polarity	R: Reverse polarity					Nil: Standard polarity					
Special code	(W): Relays with Approx. 1.5mm contact gap (Only for 1 form A, without certification.)										
Special code	4) XXX: Customer special requirement										

Notes: 1) H means that relay is on the "reset" status when delivery; D means that relay is on the "set" status when delivery.


2) The termination type 1, type 5, type 6, type 7 are only for HFE10-1/□□□ H, HFE10-2/□□□ H.

3) If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.


4) The customer special requirement express as special code after evaluating by Hongfa. e.g. (399) stands for Special polarity (See Wiring Diagram).

Outline Dimensions

HFE10-1, HFE10-2, HFE10-3, HFE10-4

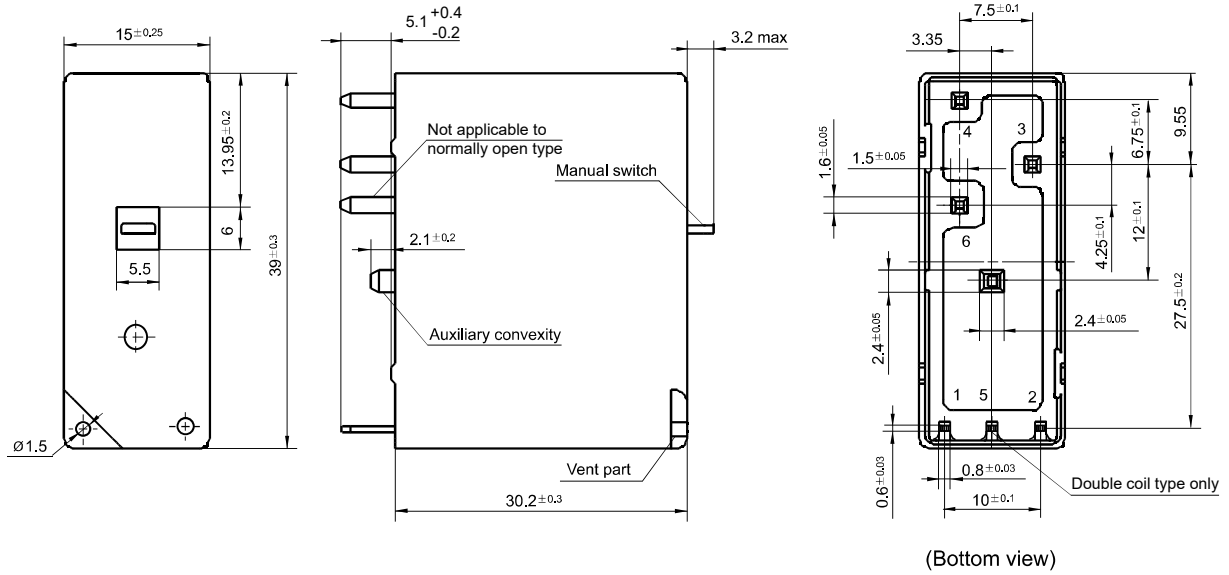

HFE10-5/ □□□ H

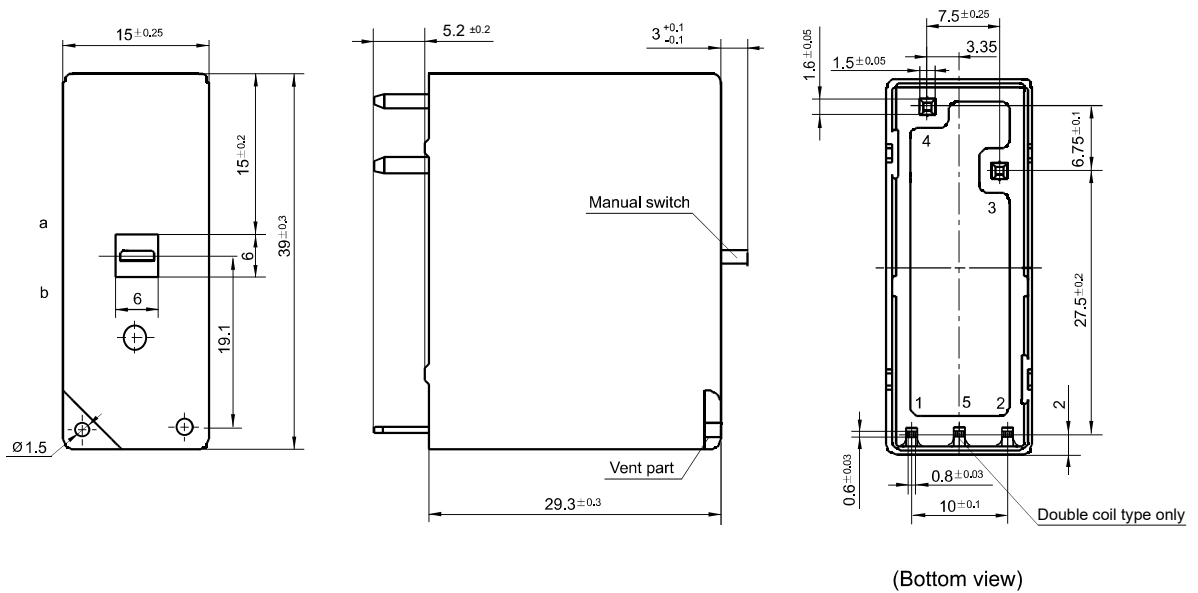

Remark: When the manual switch is pitched on point a, the contact is open; when the manual switch is pitched on point b, the contact is closed.


OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm

Outline Dimensions


HFE10-1/ □□□H1

HFE10-2/ □□□H1

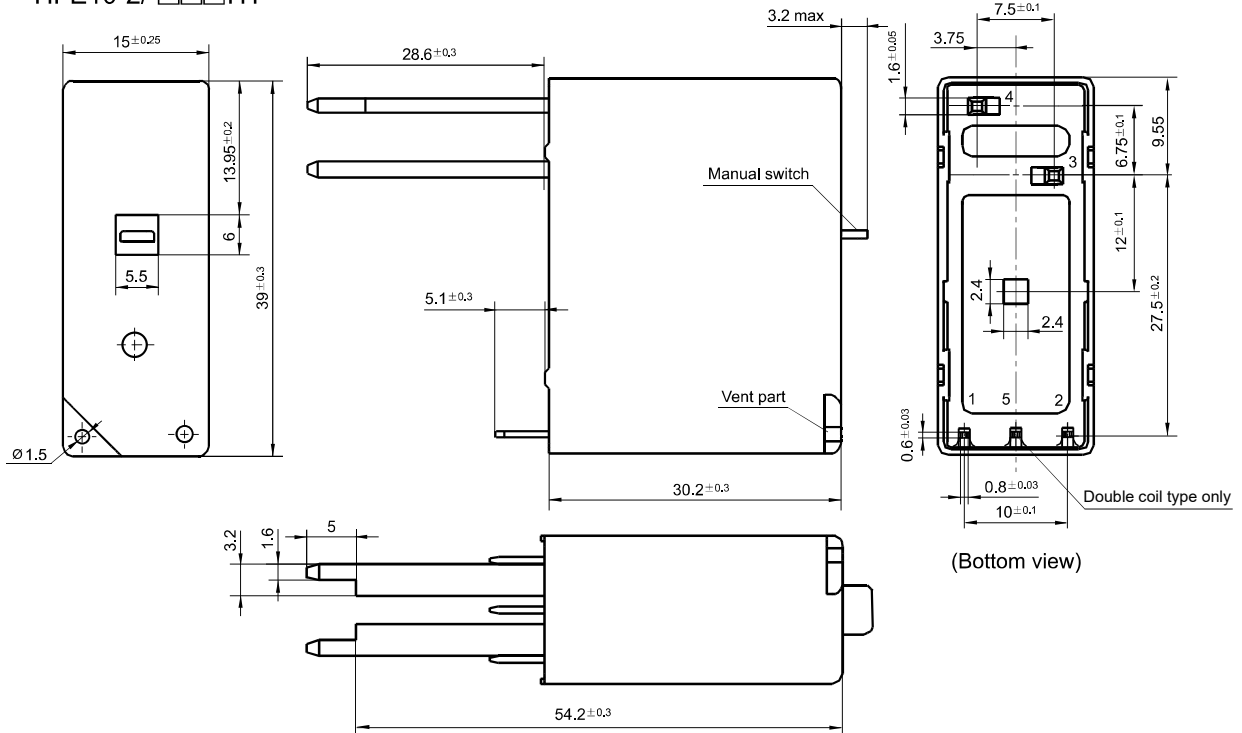

HFE10-1/ □□□H5

HFE10-2/ □□□H5

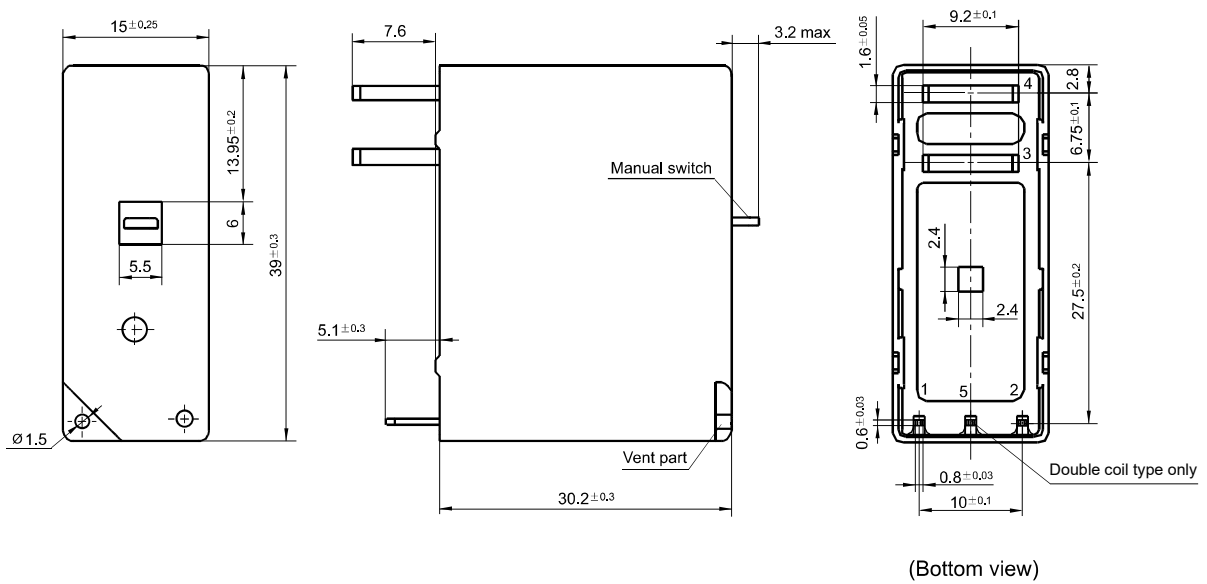


OUTLINE DIMENSIONS AND WIRING DIAGRAM


Unit: mm

Outline Dimensions

HFE10-1/ □□□ H6
HFE10-2/ □□□ H6

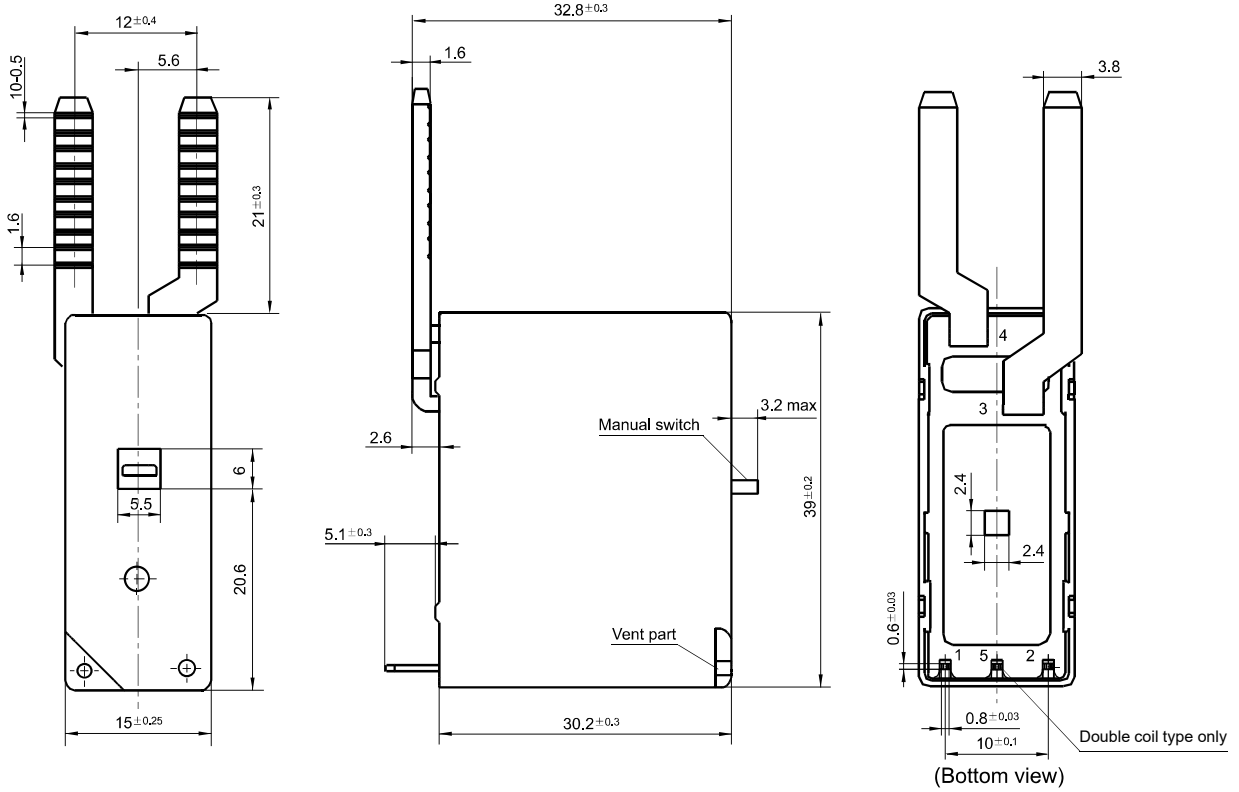

HFE10-1/ □□□ H7
HFE10-2/ □□□ H7

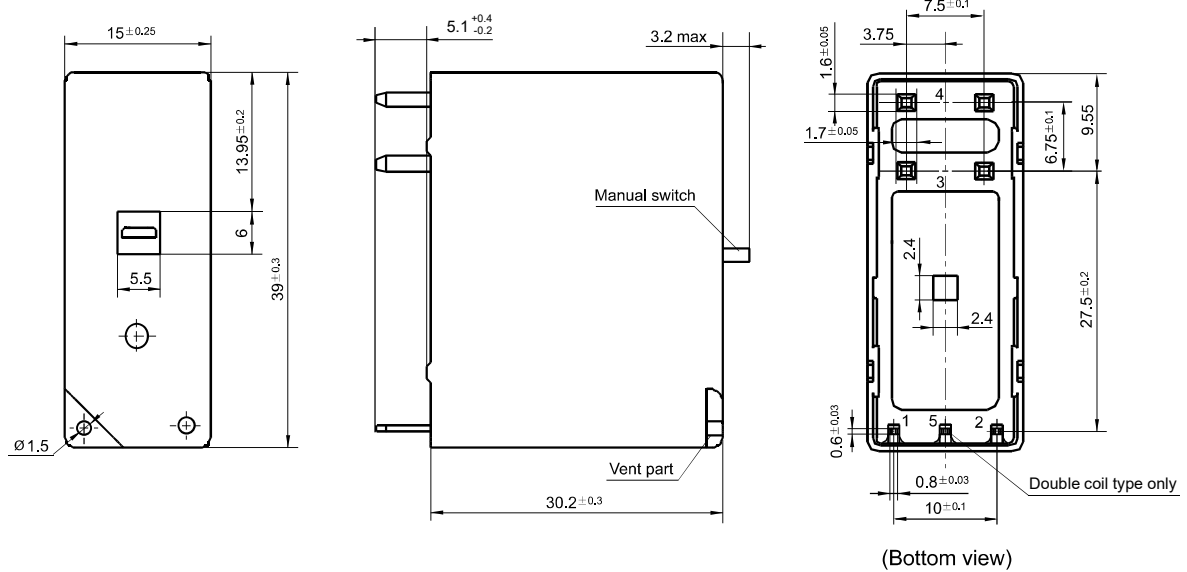

Remark: In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.



Wiring Diagram

HFE10-1, HFE10-2, HFE10-3, HFE10-4


Standard polarity

Single coil latching, 1 Form A Double coils latching, 1 Form A

Single coil latching, 1 Form B Double coils latching, 1 Form B

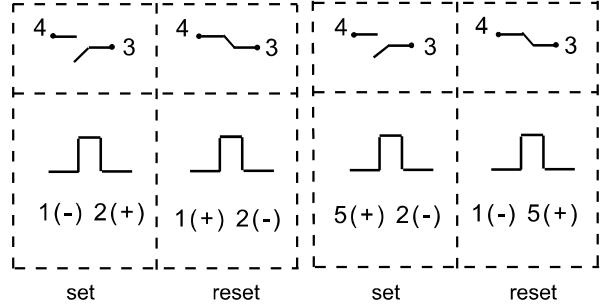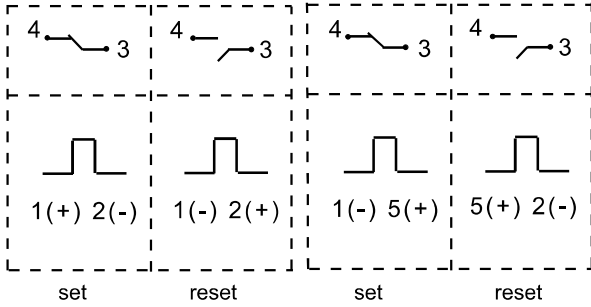



Single coil latching, 1 Form C Double coils latching, 1 Form C

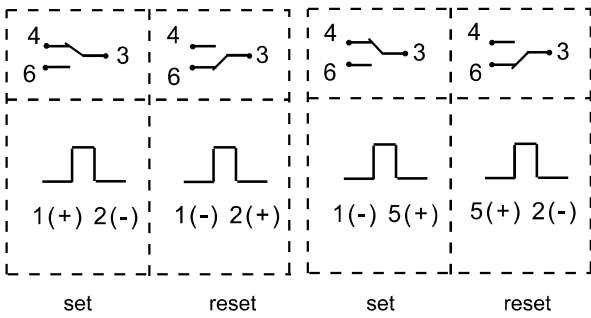


Reverse polarity

Single coil latching, 1 Form A Double coils latching, 1 Form A

Single coil latching, 1 Form C Double coils latching, 1 Form C

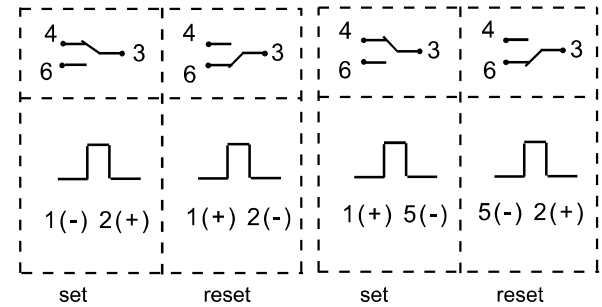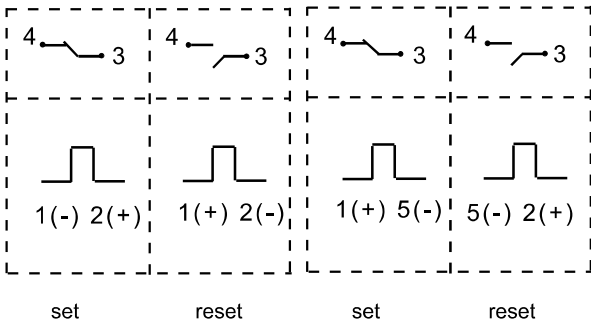


Single coil latching, 1 Form B Double coils latching, 1 Form B

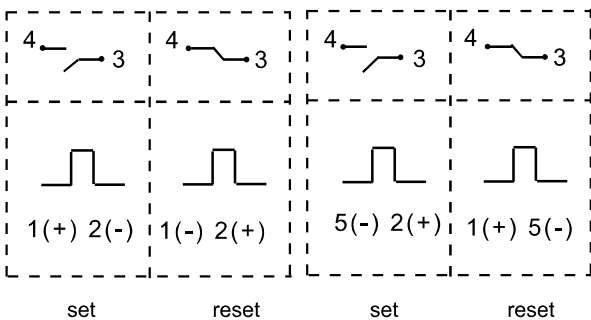


Wiring Diagram

HFE10-5

Standard polarity

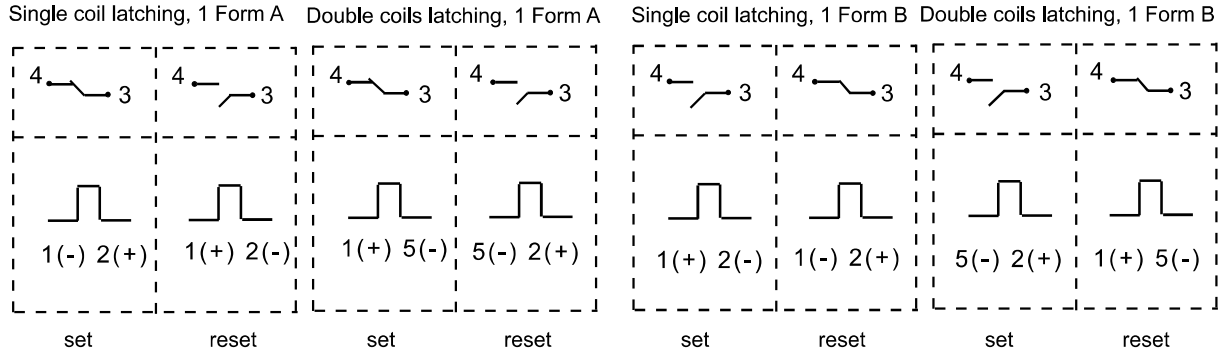


Reverse polarity

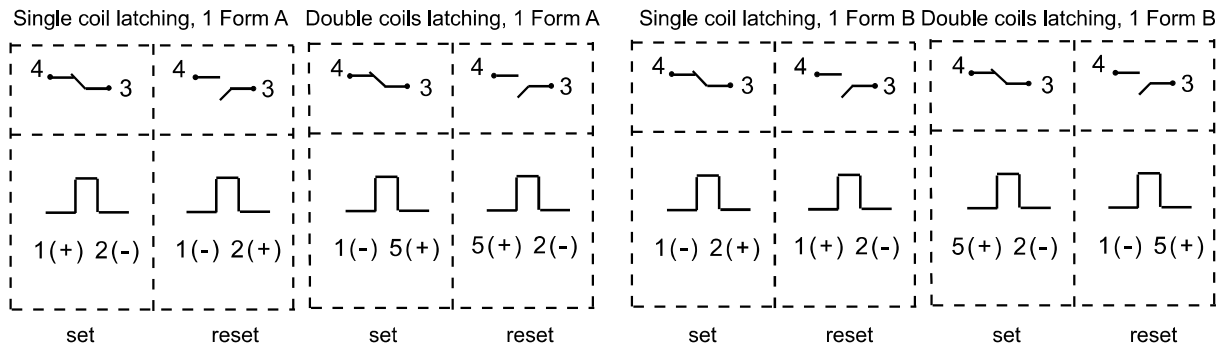

HFE10-1, HFE10-2, HFE10-3, HFE10-4, HFE10-5


(399):Special polarity



CAUTIONS

1. The recommended soldering temperature range is $250\pm 10^{\circ}\text{C}$ with the duration of 2~5s. It is not suggested to apply reflow soldering method, if it is required indeed, please contact with our technicians. It is general required that the wave soldering temperature at 250°C shall not more than 2s.
2. Latching relay is on the "reset" or "set" status when delivery, with the consideration of shock risen from transit and relay mounting, relay would be changed to "set" or "reset" status, therefore, when application (connecting the power supply), please reset the relay to "set" or "reset" status on request.
3. In order to maintain "set" or "reset" status, energized voltage applied across the coil should reach the rated voltage, impulse width should be 5 times more than "set" or "reset" time. Do not energize voltage to "set" coil and "reset" coil simultaneously. And also long energized time (more than 1 min) should be avoided.

Wave soldering temperature distribution chart

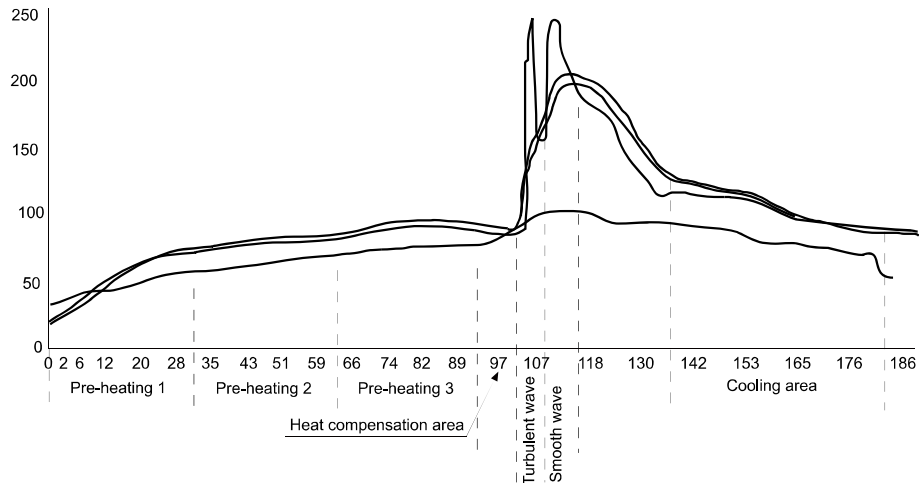

Disclaimer

The specification is for reference only. Specifications subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.