


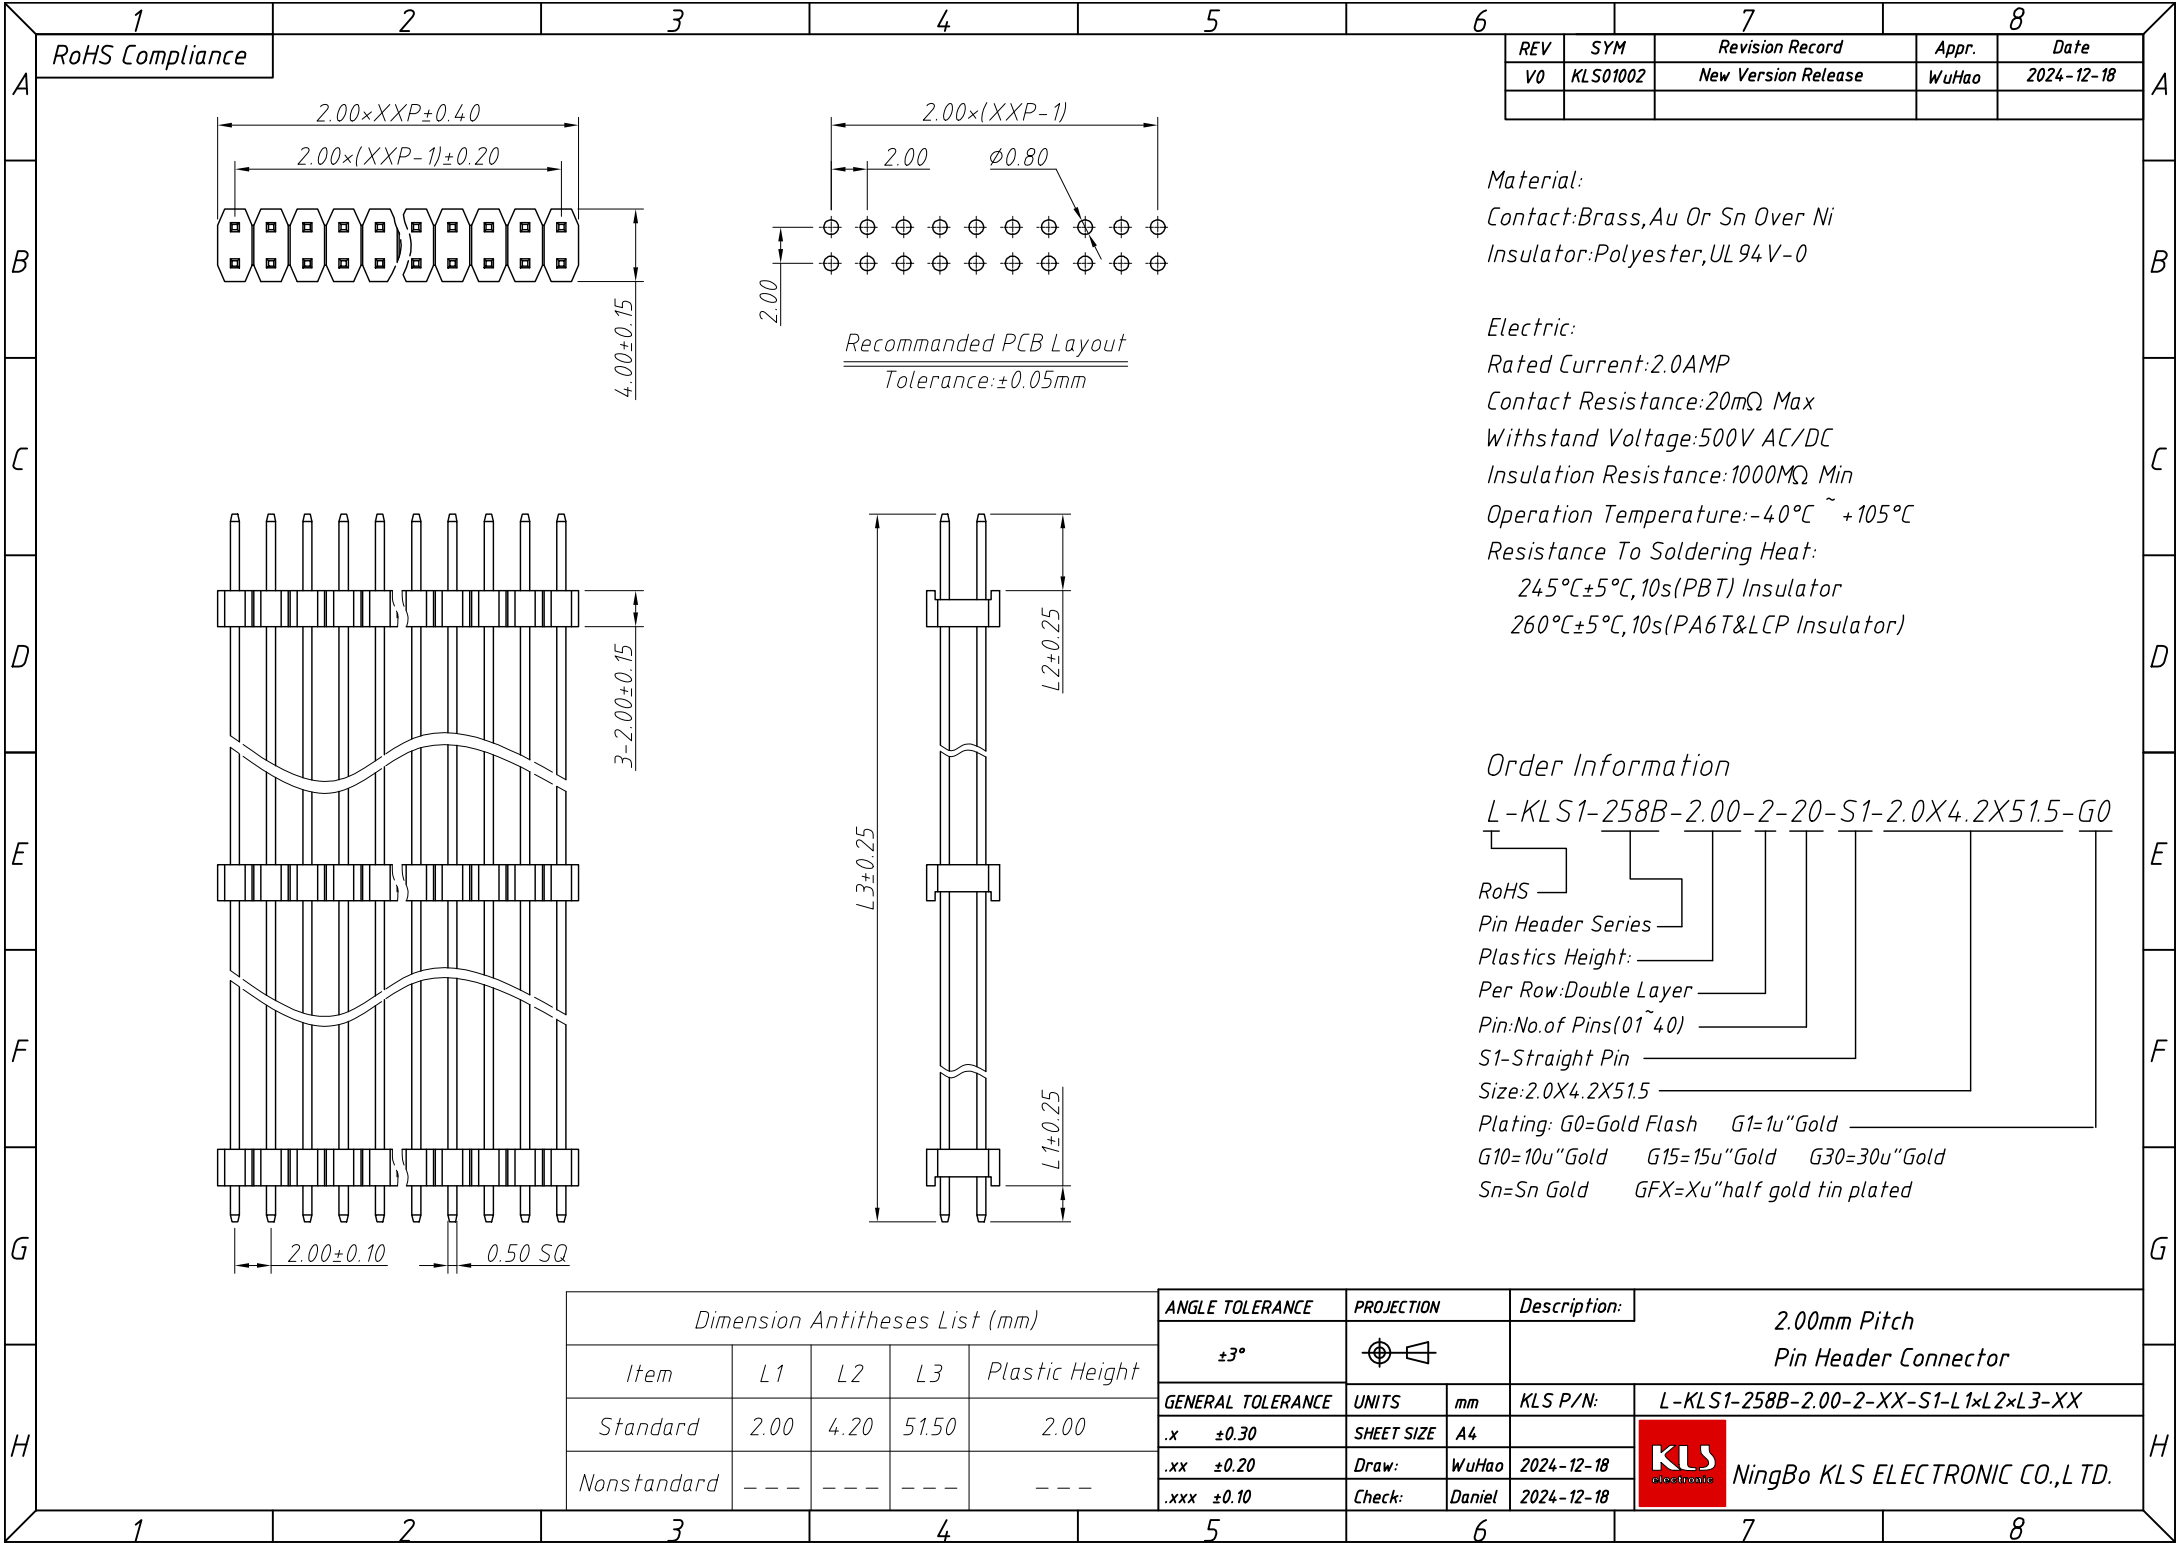


RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS01002	New Version Release	WuHao	2024-12-18

Material:
Contact:Brass,Au Or Sn Over Ni
Insulator:Polyester,UL 94 V-0

Electric:
Rated Current:2.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ ~ +105℃
Resistance To Soldering Heat:
245℃±5℃,10s(PBT) Insulator
260℃±5℃,10s(PA6T&LCP Insulator)

Order Information
L-KLS1-258B-2.00-2-20-S1-2.0X4.2X51.5-G0

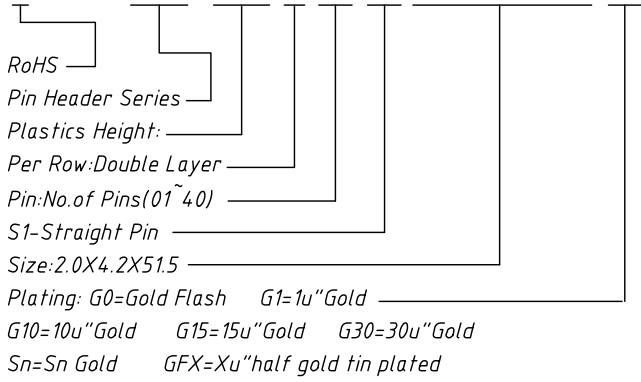

Dimension Antitheses List (mm)					ANGLE TOLERANCE	PROJECTION	Description:		
Item	L1	L2	L3	Plastic Height	±3°		2.00mm Pitch Pin Header Connector		
Standard	2.00	4.20	51.50	2.00	GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-258B-2.00-2-XX-S1-L1xL2xL3-XX
Nonstandard	---	---	---	---	.x ±0.30	SHEET SIZE	A4		NingBo KLS ELECTRONIC CO.,LTD.
					.xx ±0.20	Draw:	WuHao		
					.xxx ±0.10	Check:	Daniel		