



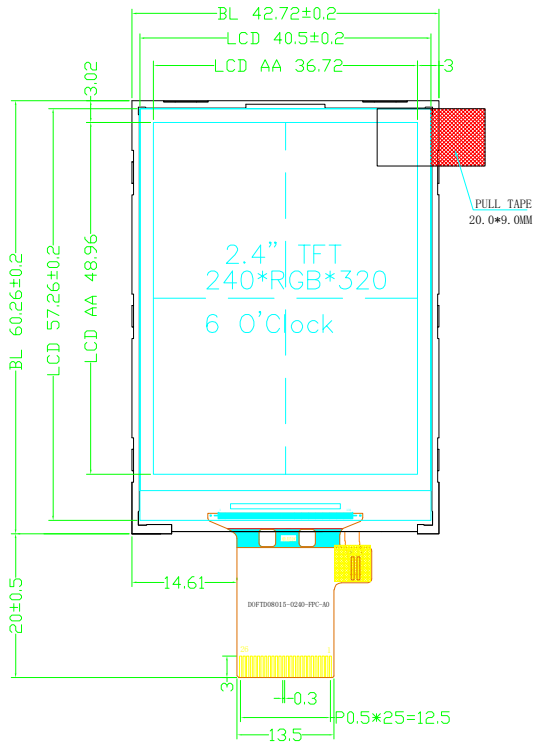

不含双面胶厚度

2.3±0.1


0.3±0.03

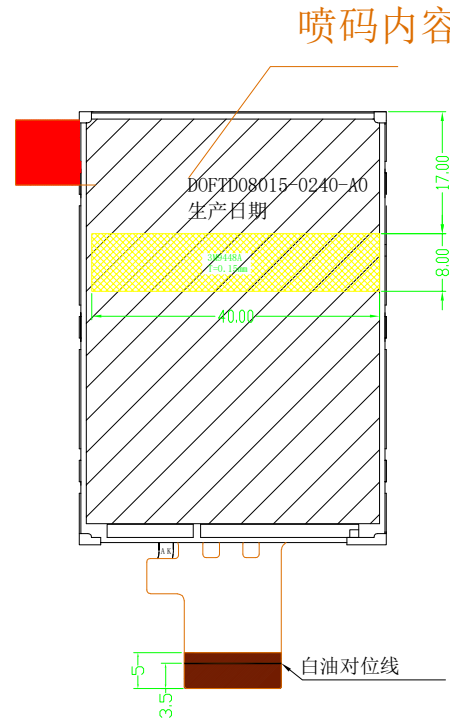

喷码内容

PIN	DESCRIPTION
1	VCC 2.8V
2	GND
3	LEDA
4	LEDK
5	RESET
6	CS
7	RS
8	WR
9	RD
10	GND
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	GND
20	XR
21	YU
22	XL
23	YD
24	NC
25	NC
26	NC

背光电路（4并联电路）：



背光驱动VF=3.2V; If=20*4mA

- 技术要求：
- 带*尺寸为重点尺寸，带（）尺寸为参考尺寸
 - LCD切割断面崩边≤1/3（单层LCD厚度）
 - 平面翘曲度≤0.35mm
 - 符合RoHS指令
 - 工作温度：-20℃～70℃
 - 储存温度：-30℃～80℃
 - 建议TP V. A开窗比LCD A. A单边大0.4mm
 - 泡棉开窗比LCD A. A单边大0.3mm

REV	SIGN	DESCRIPTION	PIC	DATE
		增加喷码内容	KZH	2023.05.15
		增加丝印字符	BILL	2022.09.13
A0		首次发行	BILL	2022.08.19

PART DESCRIPTION		LCM		厦门精显电子有限公司 XIAMEN PRECISE DISPLAY CO., LTD.			
DESIGNED				UNIT mm	SCALE 1.00	3rd ANGLE	SHEET NUMBER 1 of 1
CHECKED				PART NUMBER			DRAWING REV. A
APPROVED				MODEL NAME TFT024B218			PART NUMBER VER. N/A