


Su'scon

DONG GUAN KUAN KUN ELECTRONIC CO., LTD
YIN HE INDUSTRIAL ZONE, QING XI TOWN, TEL:+86-769- 7318000
DONG GUAN CITY, GUAN DONG CHINA (P.R.O.C) FAX:+86-769- 7318008

FOR APPROVAL

DIMENSIONS(mm)

ΦD	16
L	30
α	2.0
P	7.5
Φd	0.8

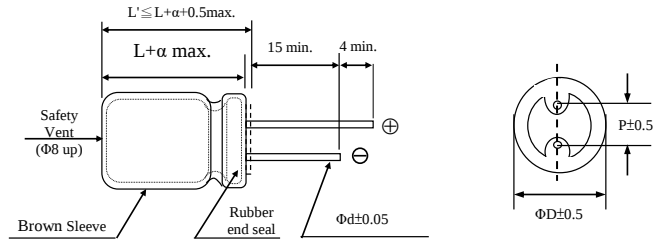

Customer:		Aluminum Electrolytic Capacitors								Su'scon		
Ozdisan		MF Series								Code		
Electric Characteristics:												
Ozdisan	Su'scon	Cap.	Cap.	Rate	Surge	Oper.	Nominal	Leakage	D.F.	R.C	IMP	Load
P/N	P/N	(uF)	Tol.	Volt.	Volt.	Temp.	Case Size	Current	MAX	100KHz	100KHz	Life
			(%)	(V-DC)	(V-DC)	(℃)	D*L(mm)	Max (uA)	(%)	(mA rms)	at 25℃ (Ω)Max	(H)
	MF050M222J30TE99S00L	2200	±20	50	63	105	16*30	1100	12	2950	0.030	5000

REMARKS:

- Leakage Current Test:** 6.3V ~100V at 20°C for 2 minutes ; 160V ~450V at 20°C for 5 minutes ;
 - Operating temperature:** 6.3V~400V -40°C~ +105°C ; 450V -25°C~ +105°C ;
 - Dissipation Factor Test:** at 20°C, 120 Hz.
 - Capacitance Test:** at 20°C, 120 Hz.
 - Ripple Current Test:** at 105°C, 100K Hz ;
 - Load Life:** 5000 hours, subjected to DC voltage with the rated ripple current is applied at 105°C.
($\Phi D \leq 6.3\Phi$, 2000hrs; $\Phi D=8\text{mm}$, 3000hrs).
- Capacitance Change:** Within±20% of initial value;
tanδ: 200% or less of initial specified value;
According to the specified value which stated in the catalogue to do the life testing;
- Leakage Current:** Initial specified value or less;
- 7. Shelf Life:** The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours 105°C without voltage applide. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.
- Capacitance Change :** Within±20% of initial value;
tanδ: 150% or less of initial specified value;
Leakage Current: Initial specified value or less.
- 8. when have characteristic requested:** Load life & shelf life test and etc. , judgment standard reference to our catalogue.

●SPECIFICATION

Voltage Range 工作電壓範圍	6.3~100V						160~450V						
Leakage Current 洩漏電流	WV≤100V, I≤0.01CV or 3uA (After 2 minutes application of DC working voltage, at 20℃)						WV>100V, I≤0.03CV+20(uA), (After 5 minutes application of DC working voltage, at 20℃)						
Dissipation Factor 散逸因素（損失角正切） (tan δ)	Measurement Frequency:120Hz. Temperature: 20℃												
	Rate Voltage(V)	6.3	10	16	25	35	50	63~80	100	120~250	350	400	450
	tanδ（MAX）	0.20	0.17	0.16	0.14	0.12	0.10	0.08	0.08	0.15	0.20	0.25	0.25
	When nominal capacitance over 1000μF, tanδ shall be added 0.02 to the listed value with increase of every 1000μF .												
Standards 參照標準	IEC 60384-4(JIS C5101-4)												

●RIPPLE CURRENT COEFFICIENTS

Frequency coefficient of allowable ripple current						
Rated Voltage(V)	Capacitance(uF)	Frequency(Hz)				
		50	120	1k	10k	100k
6.3~100	10~150	0.60	0.70	0.85	0.95	1.00
	220~1800	0.65	0.75	0.90	0.98	1.00
	2200~15000	0.75	0.80	1.00	1.00	1.00
160~450	1~330	0.55	0.65	0.80	0.90	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise.
When long life performance is required in actual use, the rms ripple current has to be reduced.

Production date:2025.03.11