


MATERIAL

Insulator:PBT, UL94V-0, Black
Contact Pin:Brass


ORDER INFORMATION

5 P S 1 S D D 8 5 - 1 X X X X X X X  L - 0 0

1:Single Row	No. of Pin Per Row(02~40)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	N:W/O Peg N:W/O Bump	B:Bag X:Box T:Tube W/O Cap A:Tray W/O Cap	RoHS
		T0:Tin Plated TE:Tin 200u"			N:Non Type	

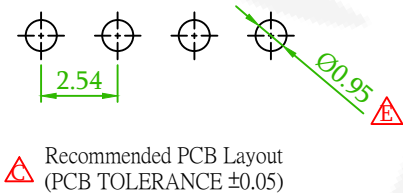

 Recommended PCB Layout
(PCB TOLERANCE ±0.05)

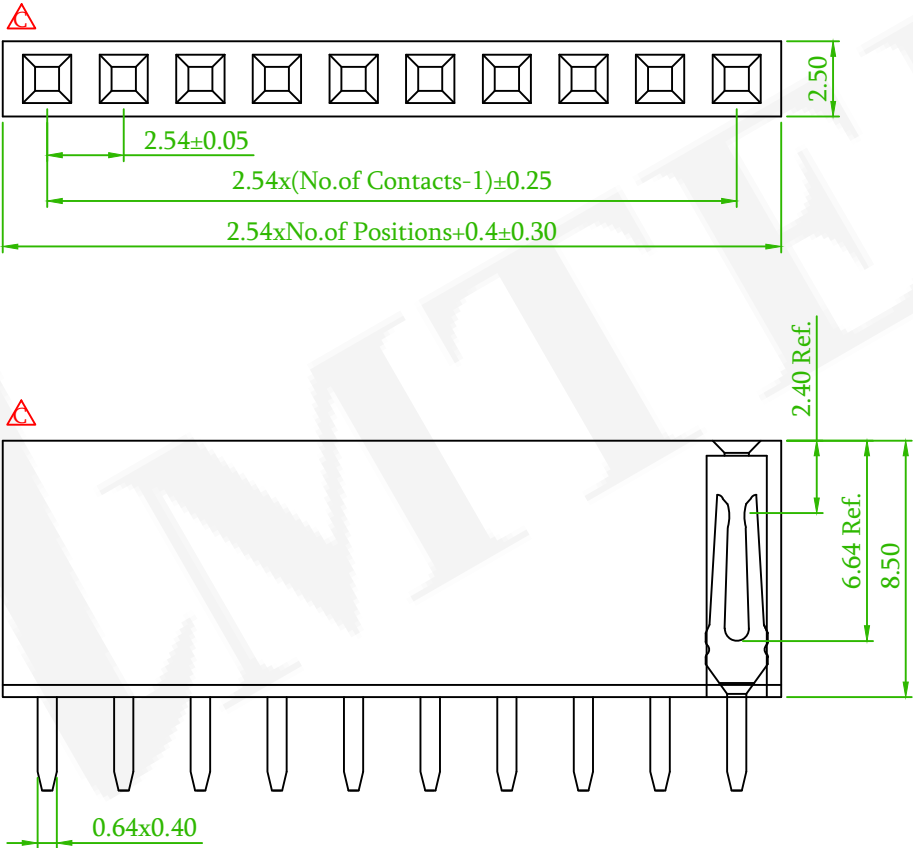

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
	品號 PART NO.	5PS1SDD85-1XXXXXXXXXL-00				繪圖 DRAWN	Roy 2017/07/28
	圖號 DRAWING NO.	GN110-RL899	版本 REV.	E	核對 CHECKED	Carol 2017/07/28	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/07/28	
	公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

	ECN NO.:231104 Revise the drawing	Alice	2023/11/24
	EasyFlow:2023100502	Alice	2023/10/05
	ECN NO.:220102 Revise the drawing	Alice	2022/05/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE