

SPECIFICATIONS

Current Rate:3 AMP

Insulation Resistance:1000M Ω Min.

Contact Resistance:20m Ω Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:P.B.T+30% Glass fiber or Hi-Temp.




Thermoplastic,UL 94V-0 $\triangle B$

Contact Pin:Copper Alloy

FINISH $\triangle A$

Gold or Tin plated on contact area, Nickle underplated overall

ORDER INFORMATION

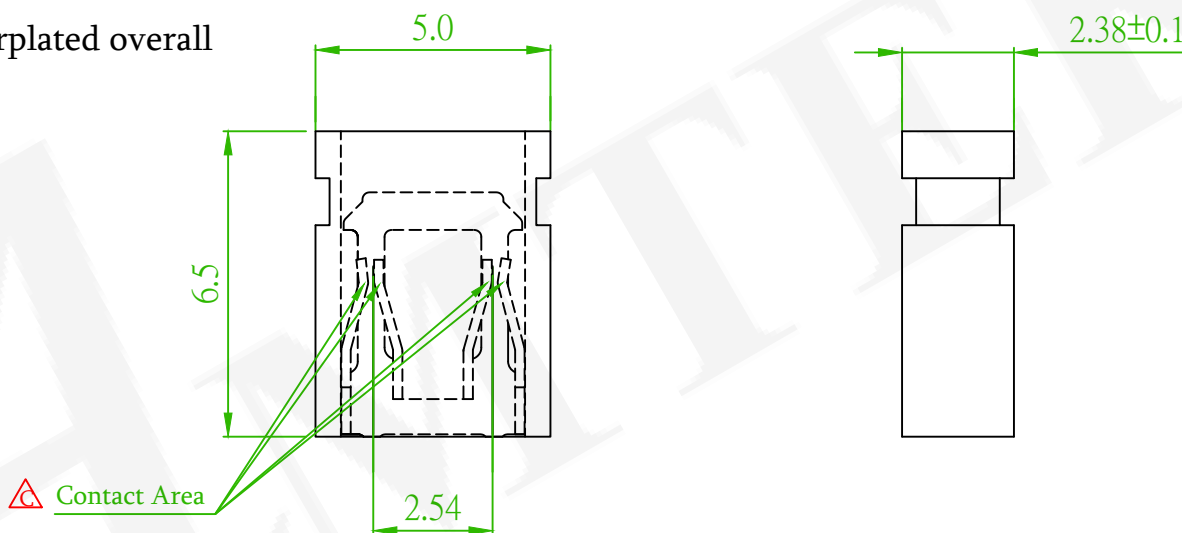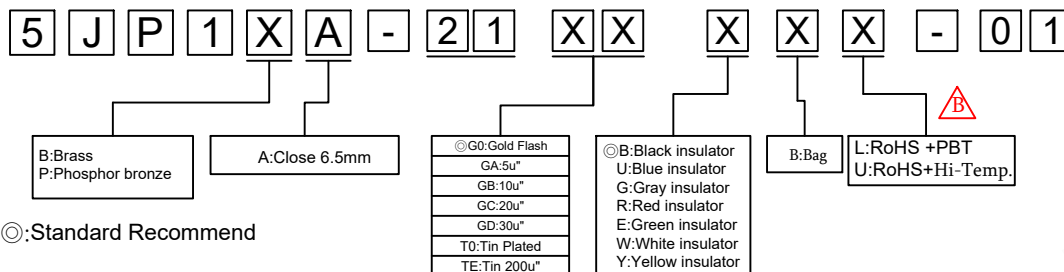

品名 TITLE	MINI JUMPER 2.54mm				頁數 Page	1/1
品號 PART NO.	$\triangle B$ 5JP1XA-21XXXXX-01				繪圖 DRAWN	Jeff 2016/03/04
圖號 DRAWING NO.	GN047-MD226	版本 REV.	C	核對 CHECKED	John 2016/03/04	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/03/04	
公差 TOLERANCE	.X $\pm$ 0.35 .XX $\pm$ 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
$\triangle A \times 2$	ECN NO.230113: Revise the Specification & Drawing	Rex	2023/03/28
$\triangle B \times 3$	Add the Hi-Temp.	Mia	2018/06/22