

Fusibles cilíndricos - Standard Francés
Cartouches fusibles cylindriques - Standard Français
Ferrule cylindrical fuse links - French Standard



54037



52459


Standard

Tamaño Taille Size	In (A)	Art. N.º		I ^{ft} (Un) (A ² S)	Disip. Perte Loss (W)	
		Percutor-Percuteur-Striker				
		sin-san-without	con-avec-with			
10 x 38 600 Vac 100 kA	6	54023		30	1,0	
	8	54027		47	1,5	
	10	54031		88	1,9	
	12	54033		129	2,3	
	16	54035		165	3,5	
	20	54037		320	4,4	
	25	54039		440	5,3	
	32	54043		860	5,5	
14 x 51 660 Vac 300 kA	10	52231	52331	100	2,5	
	12	52233	52333	170	2,9	
	16	52235	52335	250	3,8	
	20	52237	52337	370	4,8	
	25	52239	52339	560	6	
	Curve 1	32	52243	52343	850	7,6
		* 40	52247	52347	1650	9,5
	** 50	52251	52351	2000	12	
22 x 58 660 Vac 300 kA	20	52437	52537	370	4,6	
	25	52439	52539	560	5,6	
	32	52443	52543	850	7	
	40	52447	52547	1350	8,5	
	50	52451	52551	1400	10,0	
	Curve 1	63	52455	52555	4000	13,0
		* 80	52459	52559	6950	16
	** 100	52463	52563	13500	19,5	

Premium

Tamaño Taille Size	In (A)	Art. N.º	I ^{ft} (Un) (A ² S)	Disip. Perte Loss (W)
14 x 51 700 Vac 100 kA	10	54231	45	1,4
	12	54233	64	1,6
	16	54235	120	2,2
	20	54237	180	2,8
	25	54239	290	3,7
	32	54243	470	5
Curve 2	40	54247	750	6,5
	50	54251	1200	8,6
22 x 58 700 Vac 100 kA	20	54437	220	2,8
	25	54439	340	3,6
	32	54443	580	4,7
	40	54447	930	6
	50	54451	1500	7,4
	63	54455	2400	10
Curve 2	80	54459	4000	12,8
	100	54463	6400	17,6

Unid./Caja • Conditionnement • Packing (10 u.)
 (*) 600 Vac (**) 500 Vac

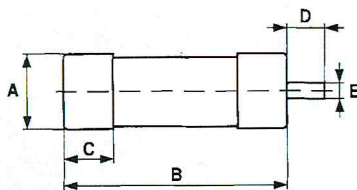

	10x38	14x51	22x58	14x67	21x51	20x127	21x118
A	10,3	14,3	22,2	14,3	20,6	20,6	20,6
B	38	51	58	66,7	50,8	127	117,5
C	10,5	13,8	16,2	-	-	-	-
D	-	7,5	7,5	-	-	-	-
E	-	3,8	3,8	-	-	-	-

Factores de corrección • Facteurs de correction • Correction factors (pag 106)
 Bases portafusibles • Coupe-circuit sectionnables • Fuse holders (pag 77)