


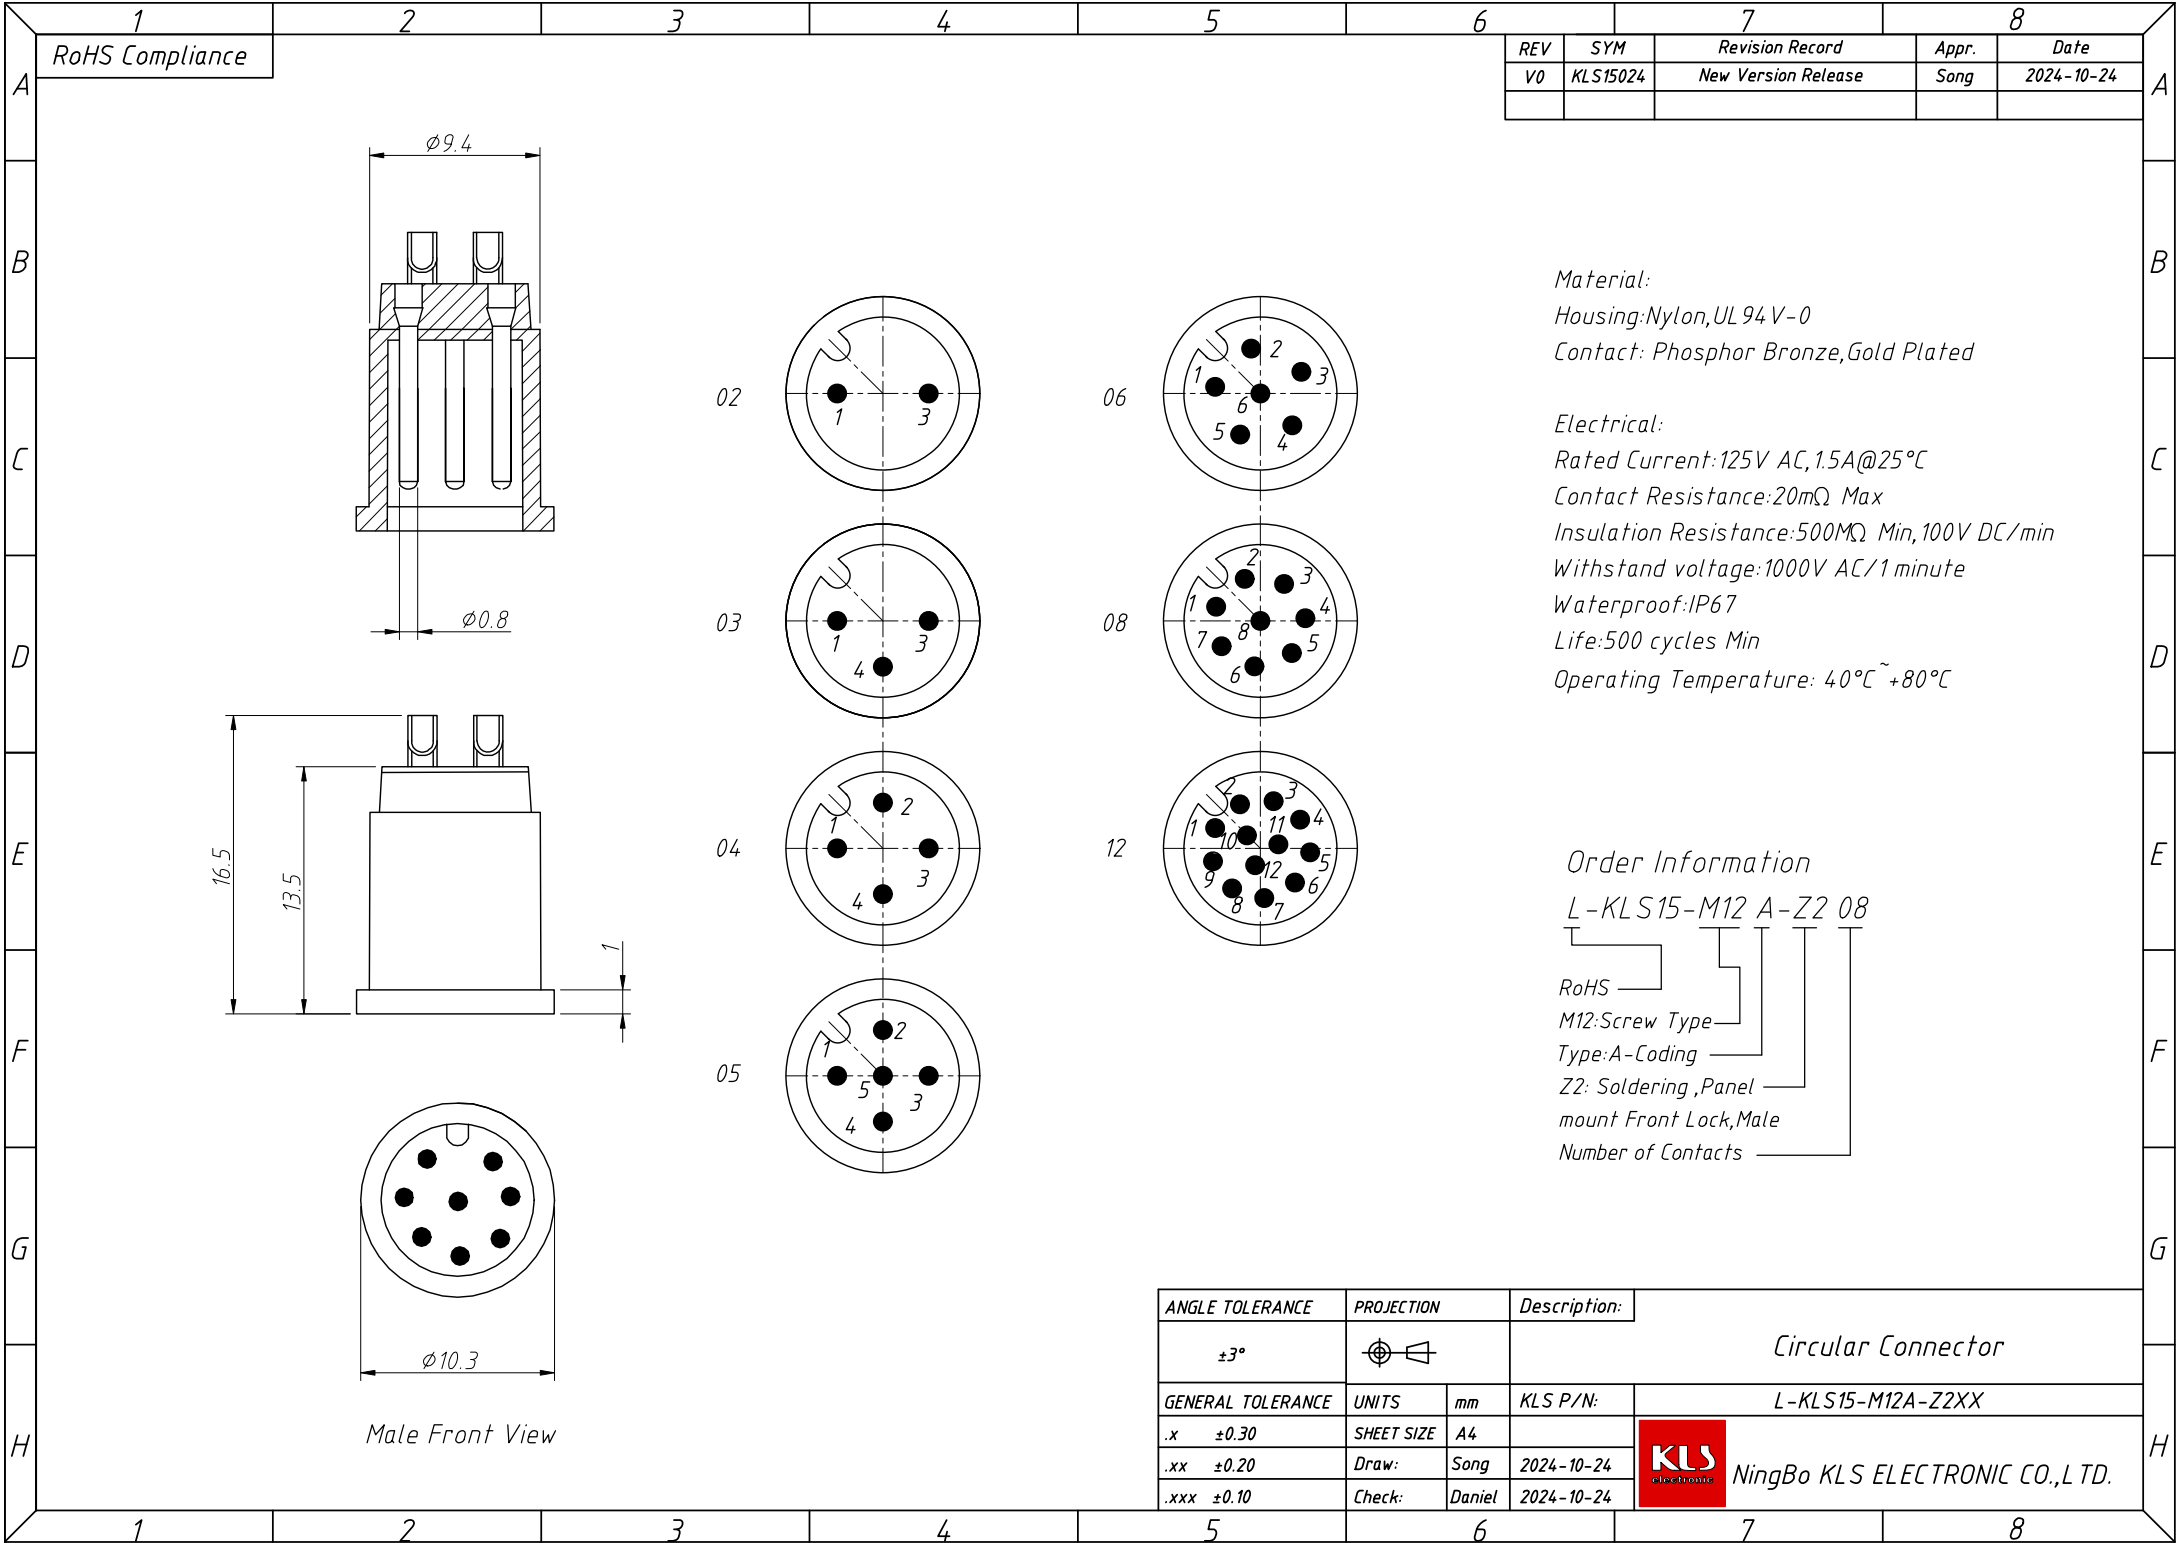

1
RoHS Compliance

6		7		8	
REV	SYM	Revision Record		Appr.	Date
V0	KLS15024	New Version Release		Song	2024-10-24

Material:
Housing:Nylon,UL 94 V-0
Contact: Phosphor Bronze,Gold Plated

Electrical:
Rated Current:125V AC,1.5A@25°C
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ Min,100V DC/min
Withstand voltage:1000V AC/1 minute
Waterproof:IP67
Life:500 cycles Min
Operating Temperature: 40°C~+80°C

Order Information
L-KLS15-M12 A-Z2 08

RoHS
M12:Screw Type
Type:A-Coding
Z2: Soldering ,Panel
mount Front Lock,Male
Number of Contacts

ANGLE TOLERANCE		PROJECTION		Description:	
$\pm 3^{\circ}$				Circular Connector	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS15-M12A-Z2XX
.x	± 0.30	SHEET SIZE	A4		
.xx	± 0.20	Draw:	Song	2024-10-24	NingBo KLS ELECTRONIC CO.,LTD.
.xxx	± 0.10	Check:	Daniel	2024-10-24	