

MATERIAL

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5PH1RDA25-2XXXX-XX

2: Dual Row

No. of contacts
Per Row(02~40)

G0: Gold Flash

GA: Au 5u"

GB: Au 10u"

GC: Au 20u"

GD: Au 30u"

T0: Tin Plated

S0: Selective Au

SA: Selective Au 5u"

SB: Selective Au 10u"

SC: Selective Au 20u"

SD: Selective Au 30u"

TE: Tin 200u"

X

N: Non Type

N: W/O Peg

X

X: Box

C: Tube With Cap

R: T/R With Cap

X

U: RoHS+Hi-Temp.

EX: 060030039




A: 6.0

B: 3.0


C: 3.9



AMTEK 耀德
2023.03.21
Released DCC

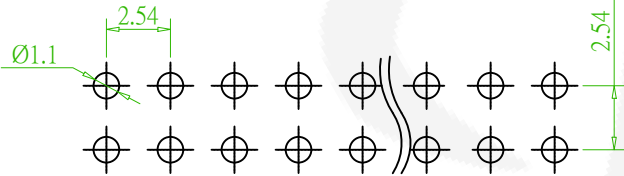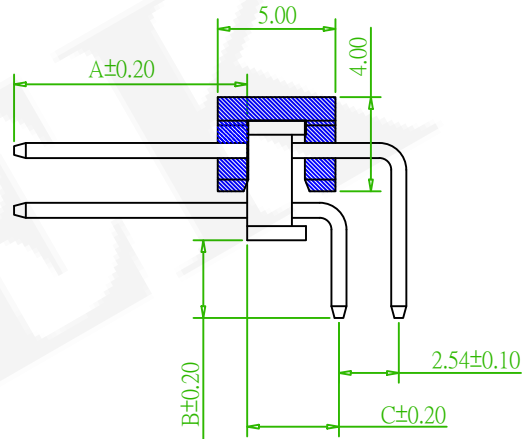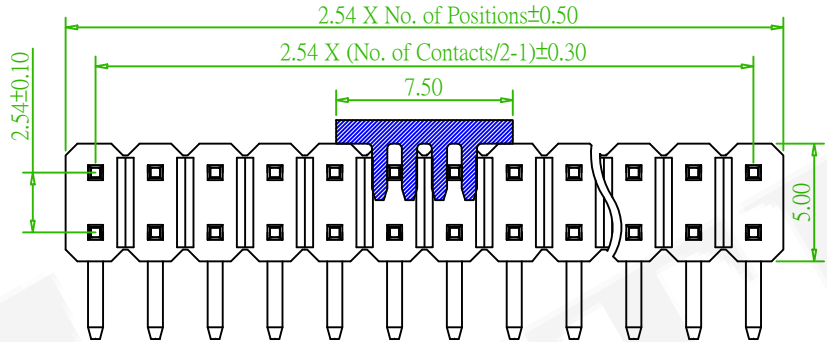

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

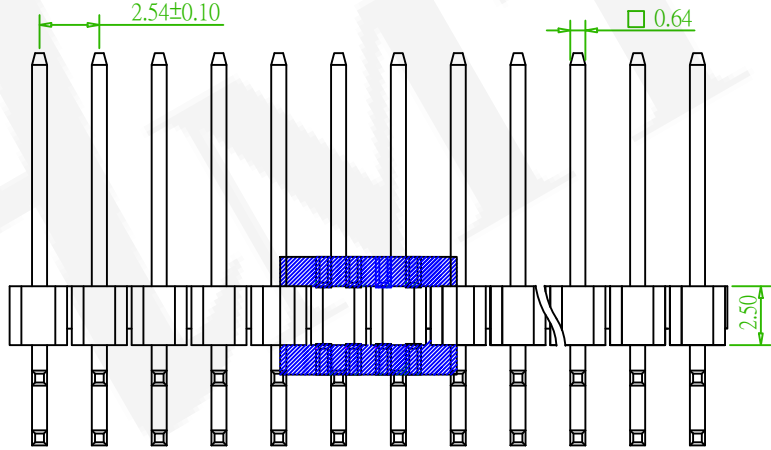

Old Part No. :PH1RD25-2XX-U

△x4	Add the Options & Revise the drawing	Rex	2023/03/21
△x2	ECN NO.:210916 Revise the drawing	Alice	2021/10/6
△	Modify order information	B	2017/01/25 Gary
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PH1RDA25-2XXXXXXXU -XXXXXXXXXX-00				繪圖 DRAWN	Mia 2015/08/20
圖號 DRAWING NO.	GN016-GA144	版本 REV.	D	核對 CHECKED	John 2015/08/20	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/20	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° ± 3	單位 UNIT	mm	THIRD ANGLE PROJECTION	