

## IGBT MODULE ( S-Series )


## ■ Outline Drawing

### ■ Features

- NPT-Technology
- Solderable Package
- Square SC SOA at  $10 \times I_C$
- High Short Circuit Withstand-Capability
- Small Temperature Dependence of the Turn-Off Switching Loss
- Low Losses And Soft Switching

### ■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

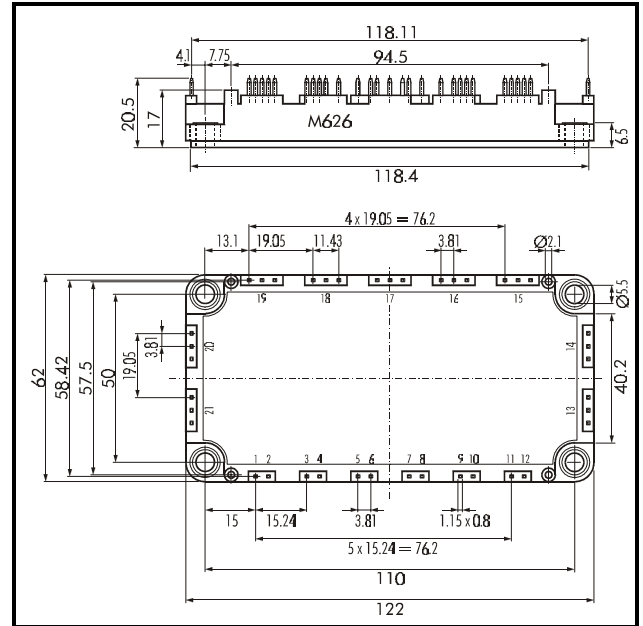


## ■ Maximum Ratings and Characteristics

### • Absolute Maximum Ratings ( $T_c=25^\circ\text{C}$ )

Items		Symbols	Ratings	Units
Collector-Emitter Voltage		$V_{CES}$	1200	V
Gate -Emitter Voltage		$V_{GES}$	$\pm 20$	
Collector Current	Continuous	$I_C$	100 / 75	A
	1ms	$I_{C \text{ PULSE}}$	200 / 150	
	Continuous	$-I_C$	75	
	1ms	$-I_{C \text{ PULSE}}$	150	
Max. Power Dissipation		$P_C$	520	W
Operating Temperature		$T_j$	+150	$^\circ\text{C}$
Storage Temperature		$T_{stg}$	-40 ~ +125	
Isolation Voltage	A.C. 1min.	$V_{is}$	2500	V
Screw Torque		Mounting*	3.5	Nm


Note: \*Recommendable Value; 2.5 - 3.5 Nm (M5)

## ■ Equivalent Circuit

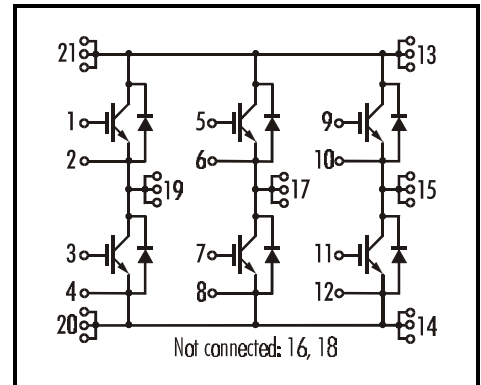







### • Electrical Characteristics ( at $T_j=25^\circ\text{C}$ )







Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	$I_{CES}$	$V_{GE}=0V$ $V_{CE}=1200V$			1.0	mA
Gate-Emitter Leakage Current	$I_{GES}$	$V_{CE}=0V$ $V_{GE}=\pm 20V$			200	nA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{GE}=20V$ $I_C=75mA$	5.5	7.2	8.5	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=75A$ ; $T_j = 25^\circ\text{C}$		2.3	2.6	
		$V_{GE}=15V$ $I_C=75A$ ; $T_j = 125^\circ\text{C}$		2.8		
Input Capacitance	$C_{ies}$	$V_{GE}=0V$		9000		pF
Output Capacitance	$C_{oes}$	$V_{CE}=10V$		1875		
Reverse Transfer Capacitance	$C_{res}$	$f=1MHz$		1650		
Turn-on Time	$t_{ON}$	$V_{CC}=600V$ $I_C=75A$ $V_{GE}=\pm 15V$ $R_G=16\Omega$ Inductive Load		0.35	1.2	$\mu\text{s}$
	$t_{r,x}$			0.25	0.6	
	$t_{r,i}$			0.10		
Turn-off Time	$t_{OFF}$			0.45	1.0	
	$T_f$			0.08	0.3	
Diode Forward On-Voltage	$V_F$	$I_F=75A$ ; $V_{GE}=0V$ ; $T_j = 25^\circ\text{C}$		2.5	3.3	V
		$I_F=75A$ ; $V_{GE}=0V$ ; $T_j = 125^\circ\text{C}$		2.0		
Reverse Recovery Time	$t_{rr}$	$I_F=75A$			350	ns




### • Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(j-c)}$	IGBT			0.24	$^\circ\text{C/W}$
	$R_{th(j-c)}$	Diode			0.50	
	$R_{th(c-f)}$	With Thermal Compound		0.05		

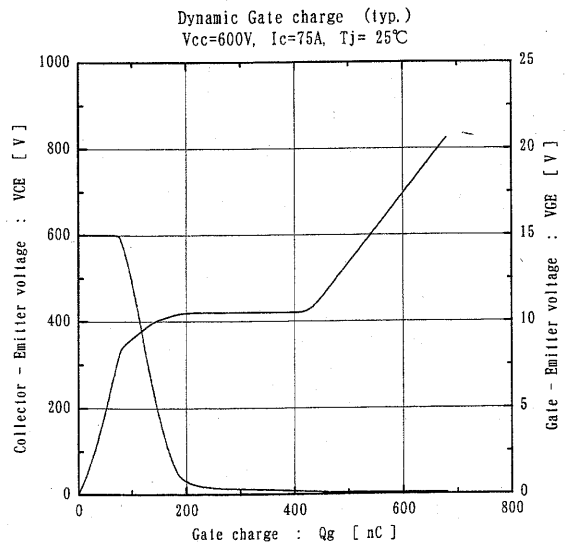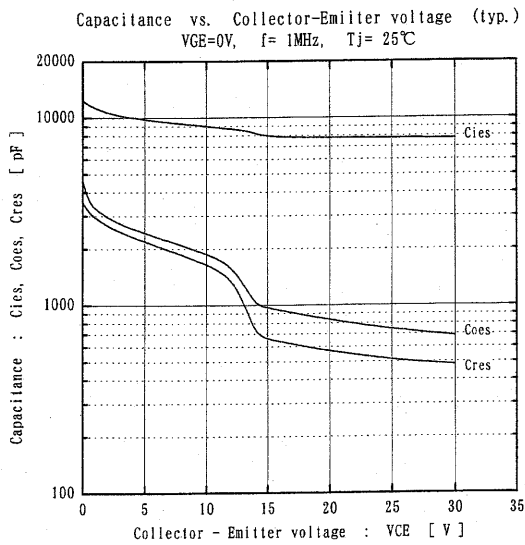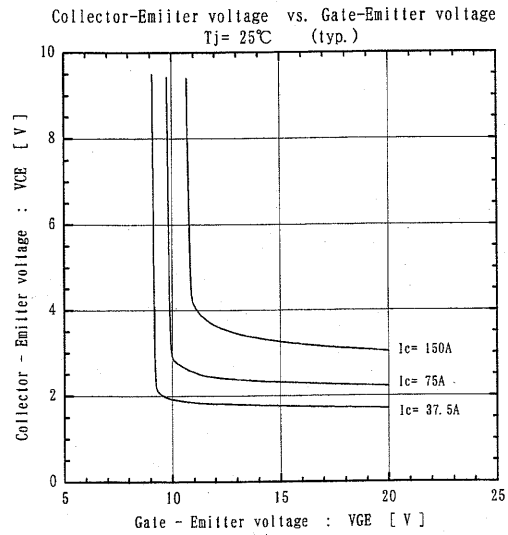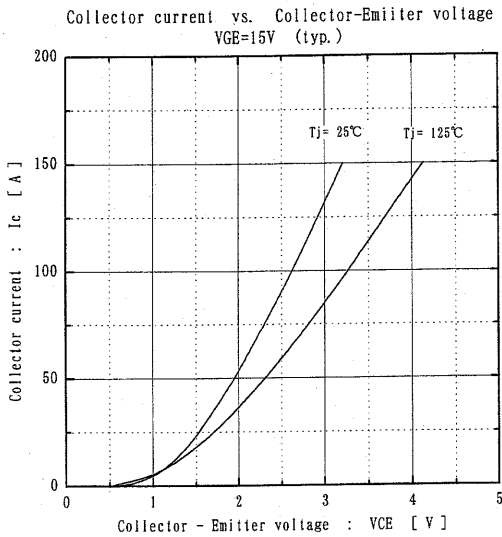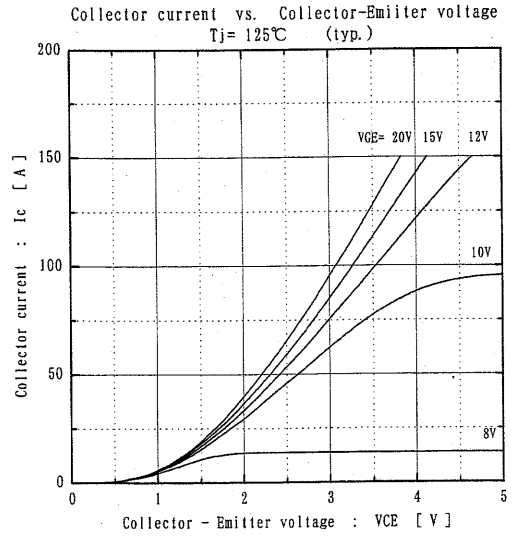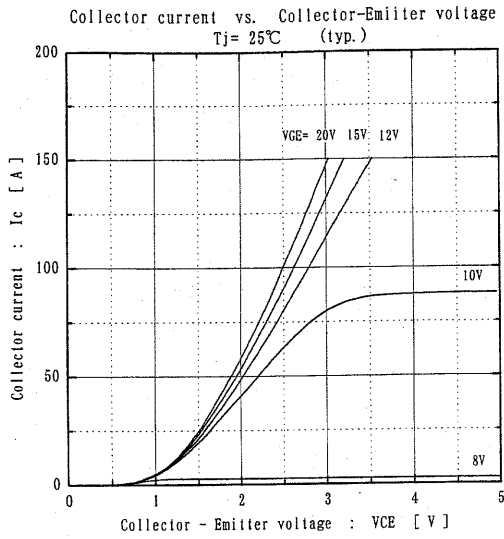


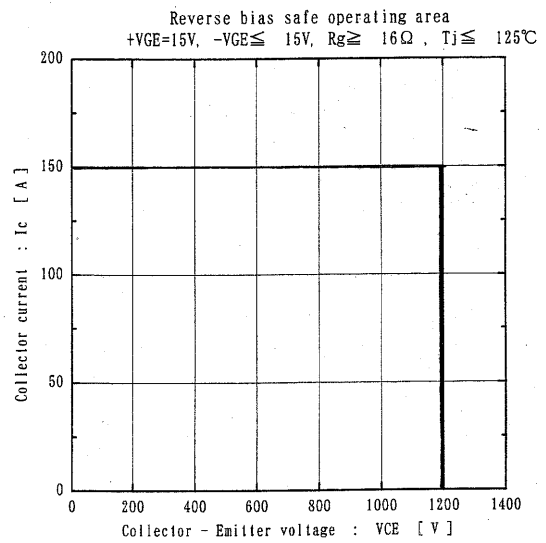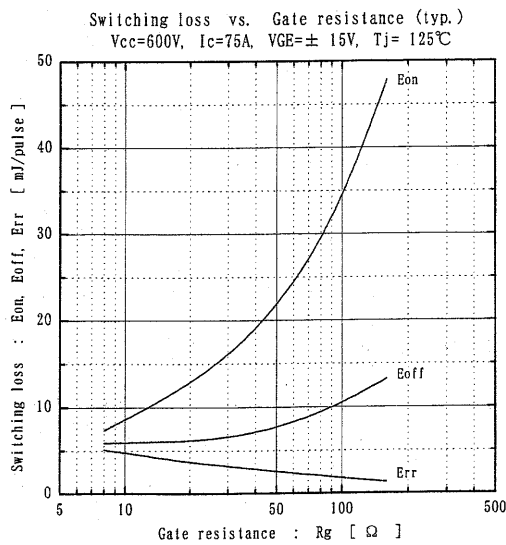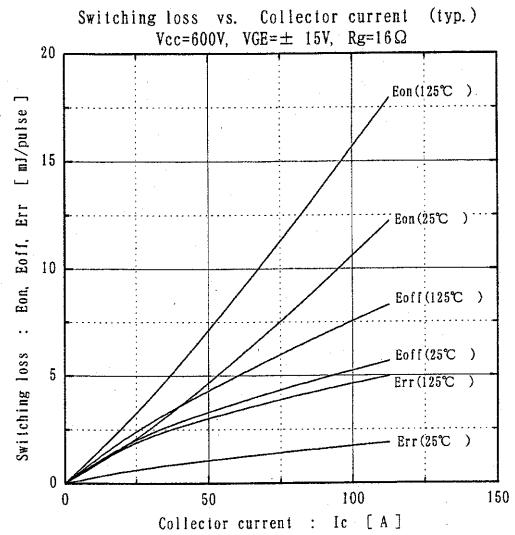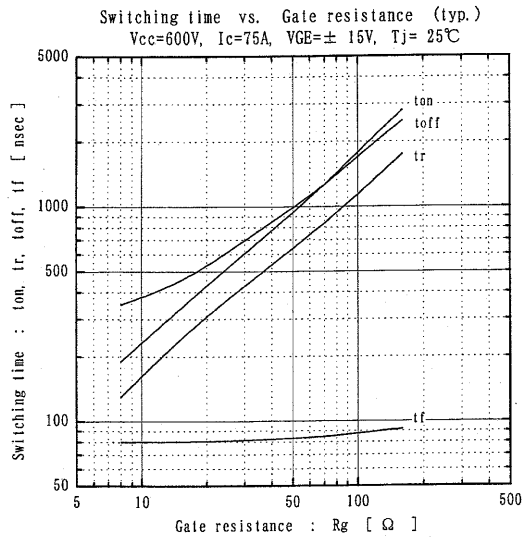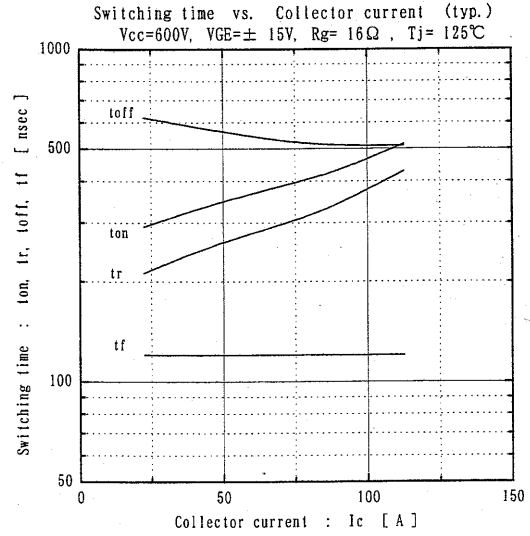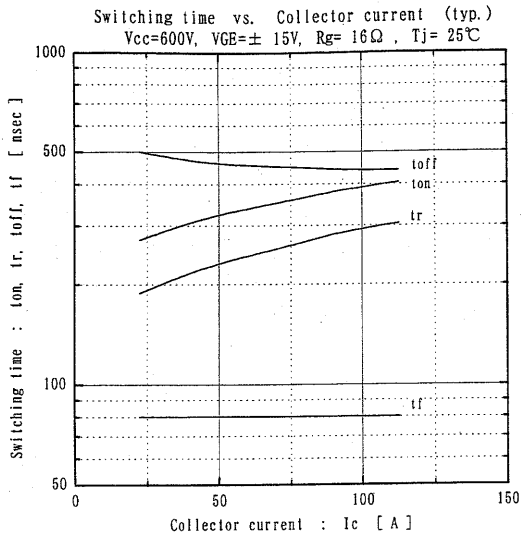

Forward current vs. Forward on voltage (typ.)

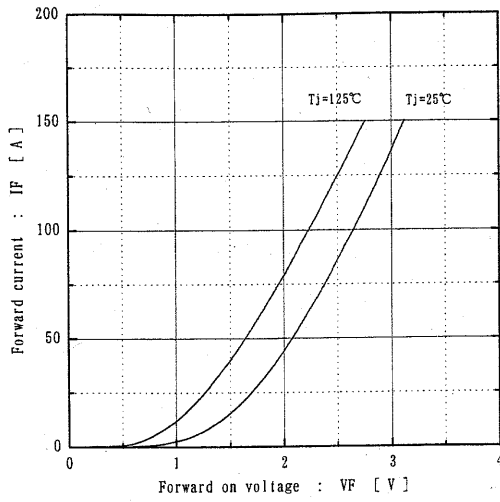

Reverse recovery characteristics (typ.)

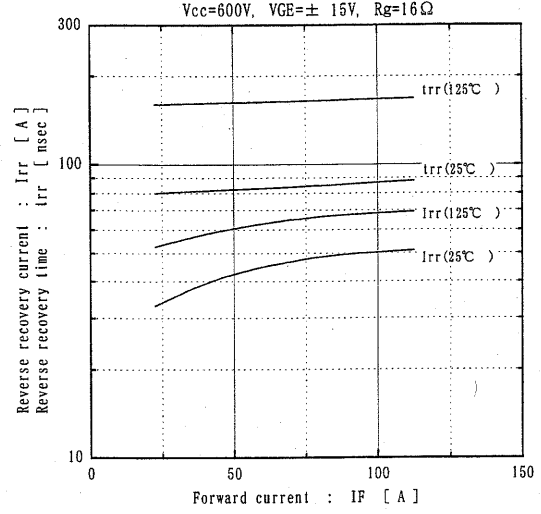

Transient thermal resistance

