


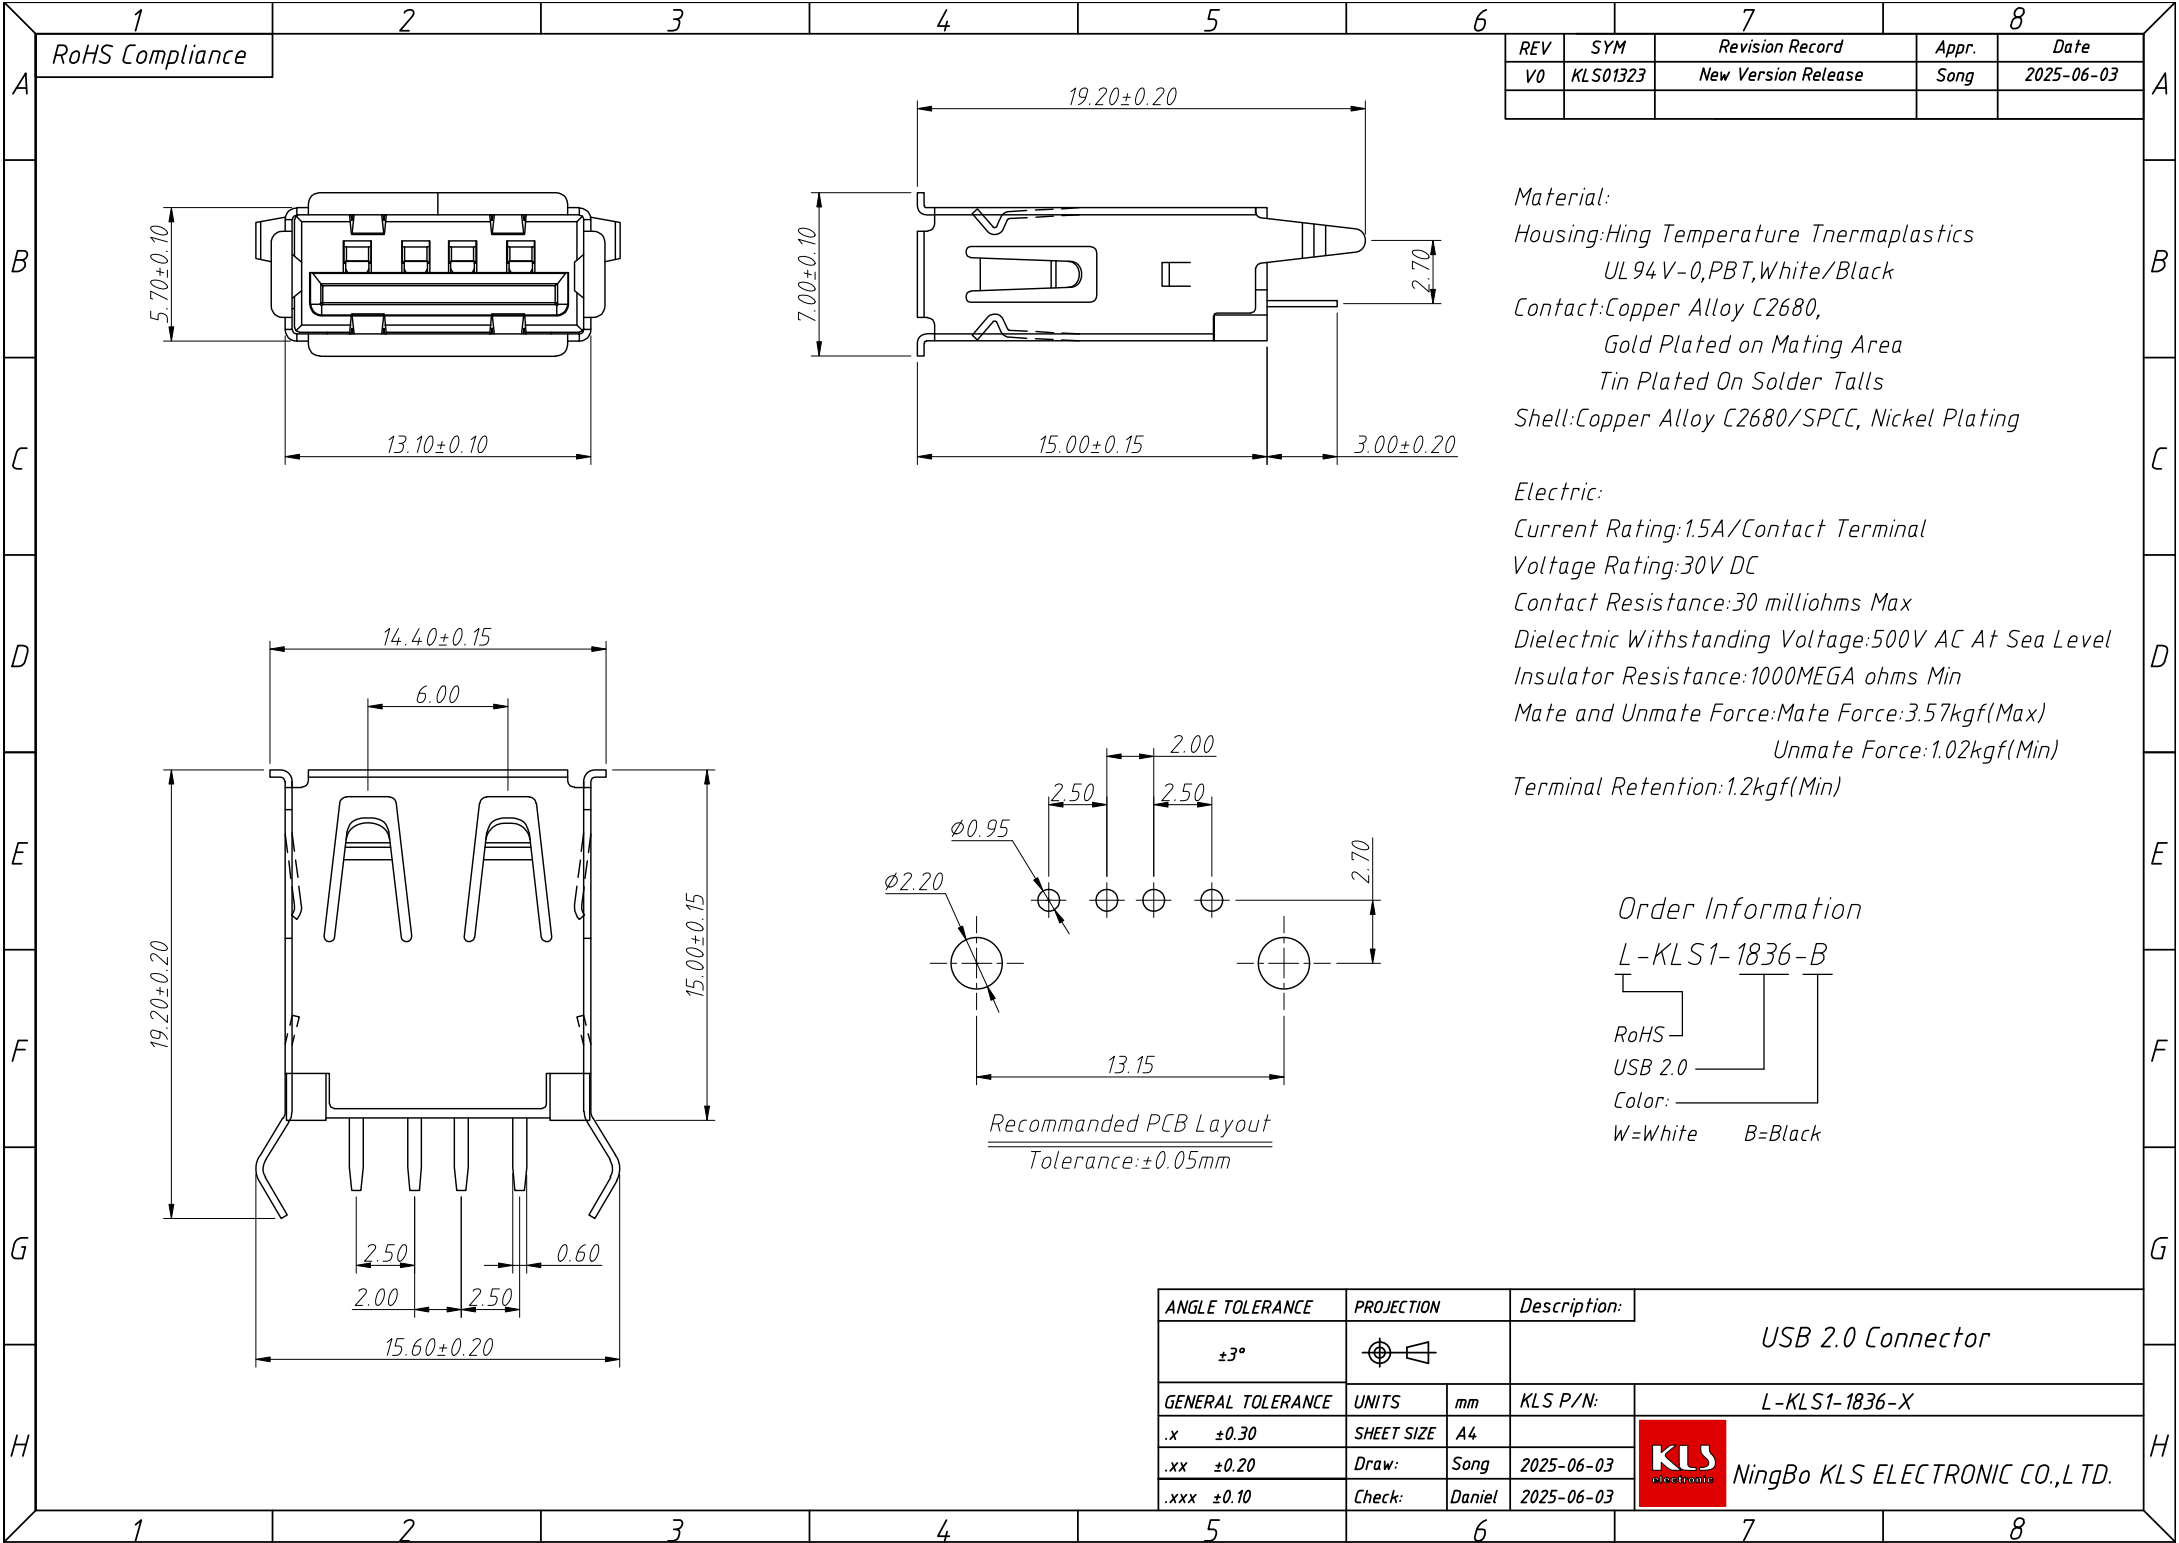

RoHS Compliance


REV	SYM	Revision Record	Appr.	Date
V0	KLS01323	New Version Release	Song	2025-06-03

Material:
Housing:Hing Temperature Tnermaplastics
UL 94 V-0,PBT,White/Black
Contact:Copper Alloy C2680,
Gold Plated on Mating Area
Tin Plated On Solder Talls
Shell:Copper Alloy C2680/SPCC, Nickel Plating

Electric:
Current Rating:1.5A/Contact Terminal
Voltage Rating:30V DC
Contact Resistance:30 milliohms Max
Dielectnic Withstanding Voltage:500V AC At Sea Level
Insulator Resistance:1000MEGA ohms Min
Mate and Unmate Force:Mate Force:3.57kgf(Max)
Unmate Force:1.02kgf(Min)
Terminal Retention:1.2kgf(Min)

Order Information
L-KLS1-1836-B

RoHS
USB 2.0
Color:
W=White B=Black

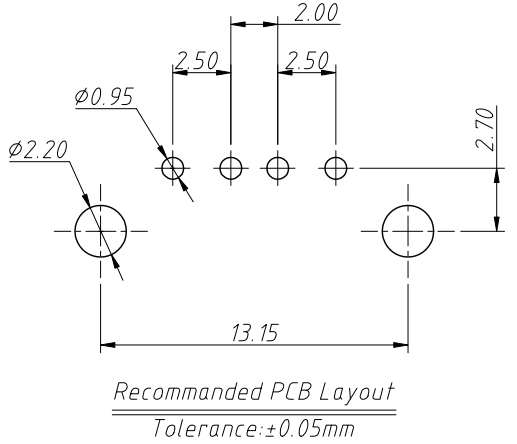

ANGLE TOLERANCE	PROJECTION	Description:
±3°		USB 2.0 Connector
GENERAL TOLERANCE	UNITS	mm
.x ±0.30	SHEET SIZE	A4
.xx ±0.20	Draw:	Song
.xxx ±0.10	Check:	Daniel

KLS electronic	NingBo KLS ELECTRONIC CO.,LTD.
----------------	--------------------------------