



Automotive Parts > Automotive Connector Accessories > Automotive Connector Locks & Position Assurance > DEUTSCH DTM Wedgelocks



Number of Positions: 8

Primary Product Color: Orange

Connector & Contact Retention Accessory Type: Secondary Lock

Primary Product Material: PBT

Operating Temperature Range: -55 – 125 °C [-67 – 257 °F]

[All DEUTSCH DTM Wedgelocks \(25\)](#)

Features

Product Type Features

Sealable	No
Connector & Contact Retention Accessory Type	Secondary Lock

Configuration Features

Number of Positions	8
---------------------	---

Body Features

Primary Product Color	Orange
Primary Product Material	PBT

Usage Conditions

Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

Packaging Features

Packaging Method	Box
------------------	-----

Other

Serviceable	Yes
-------------	-----



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-D485-CH8172
DEUTSCH DTM Housings



TE Part # DT-RT1
EXT TOOL, FRONT RELEASE

Also in the Series | **DEUTSCH DT**



Automotive Housings(124)



Connector Caps & Covers(1)



Connector Strain Relief(46)



Infotainment & Multimedia Cable Assemblies(1)



Other Automotive Connector Accessories(8)




Rectangular Backshells & Clamps(1)

Also in the Series

DEUTSCH DTM



Automotive Connector Caps & Covers (8)

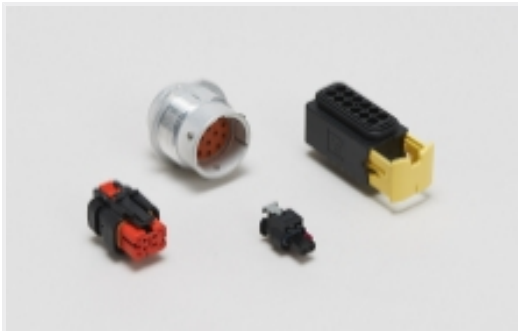

Automotive Housings(124)



Circular Connector Backshells & Clamps(2)



Connector Strain Relief(46)

Customers Also Bought



TE Part #CAT-D485-W416
DEUTSCH DTM Wedgelocks



TE Part #CAT-D485-CH8172
DEUTSCH DTM Housings

Documents

WEDGE LOCK, 8P, PLG, ORG, DTM

English

3D PDF

3D

Customer View Model



[ENG_CVM_CVM_WM-8S_D.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_WM-8S_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_WM-8S_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

TERMINALS AND CONNECTORS

English

[ICT Terminals and Connectors Catalogue](#)

English

CONNECTOR SELECTOR

English

Application Specification

English

Agency Approvals

[UL Report](#)

English