


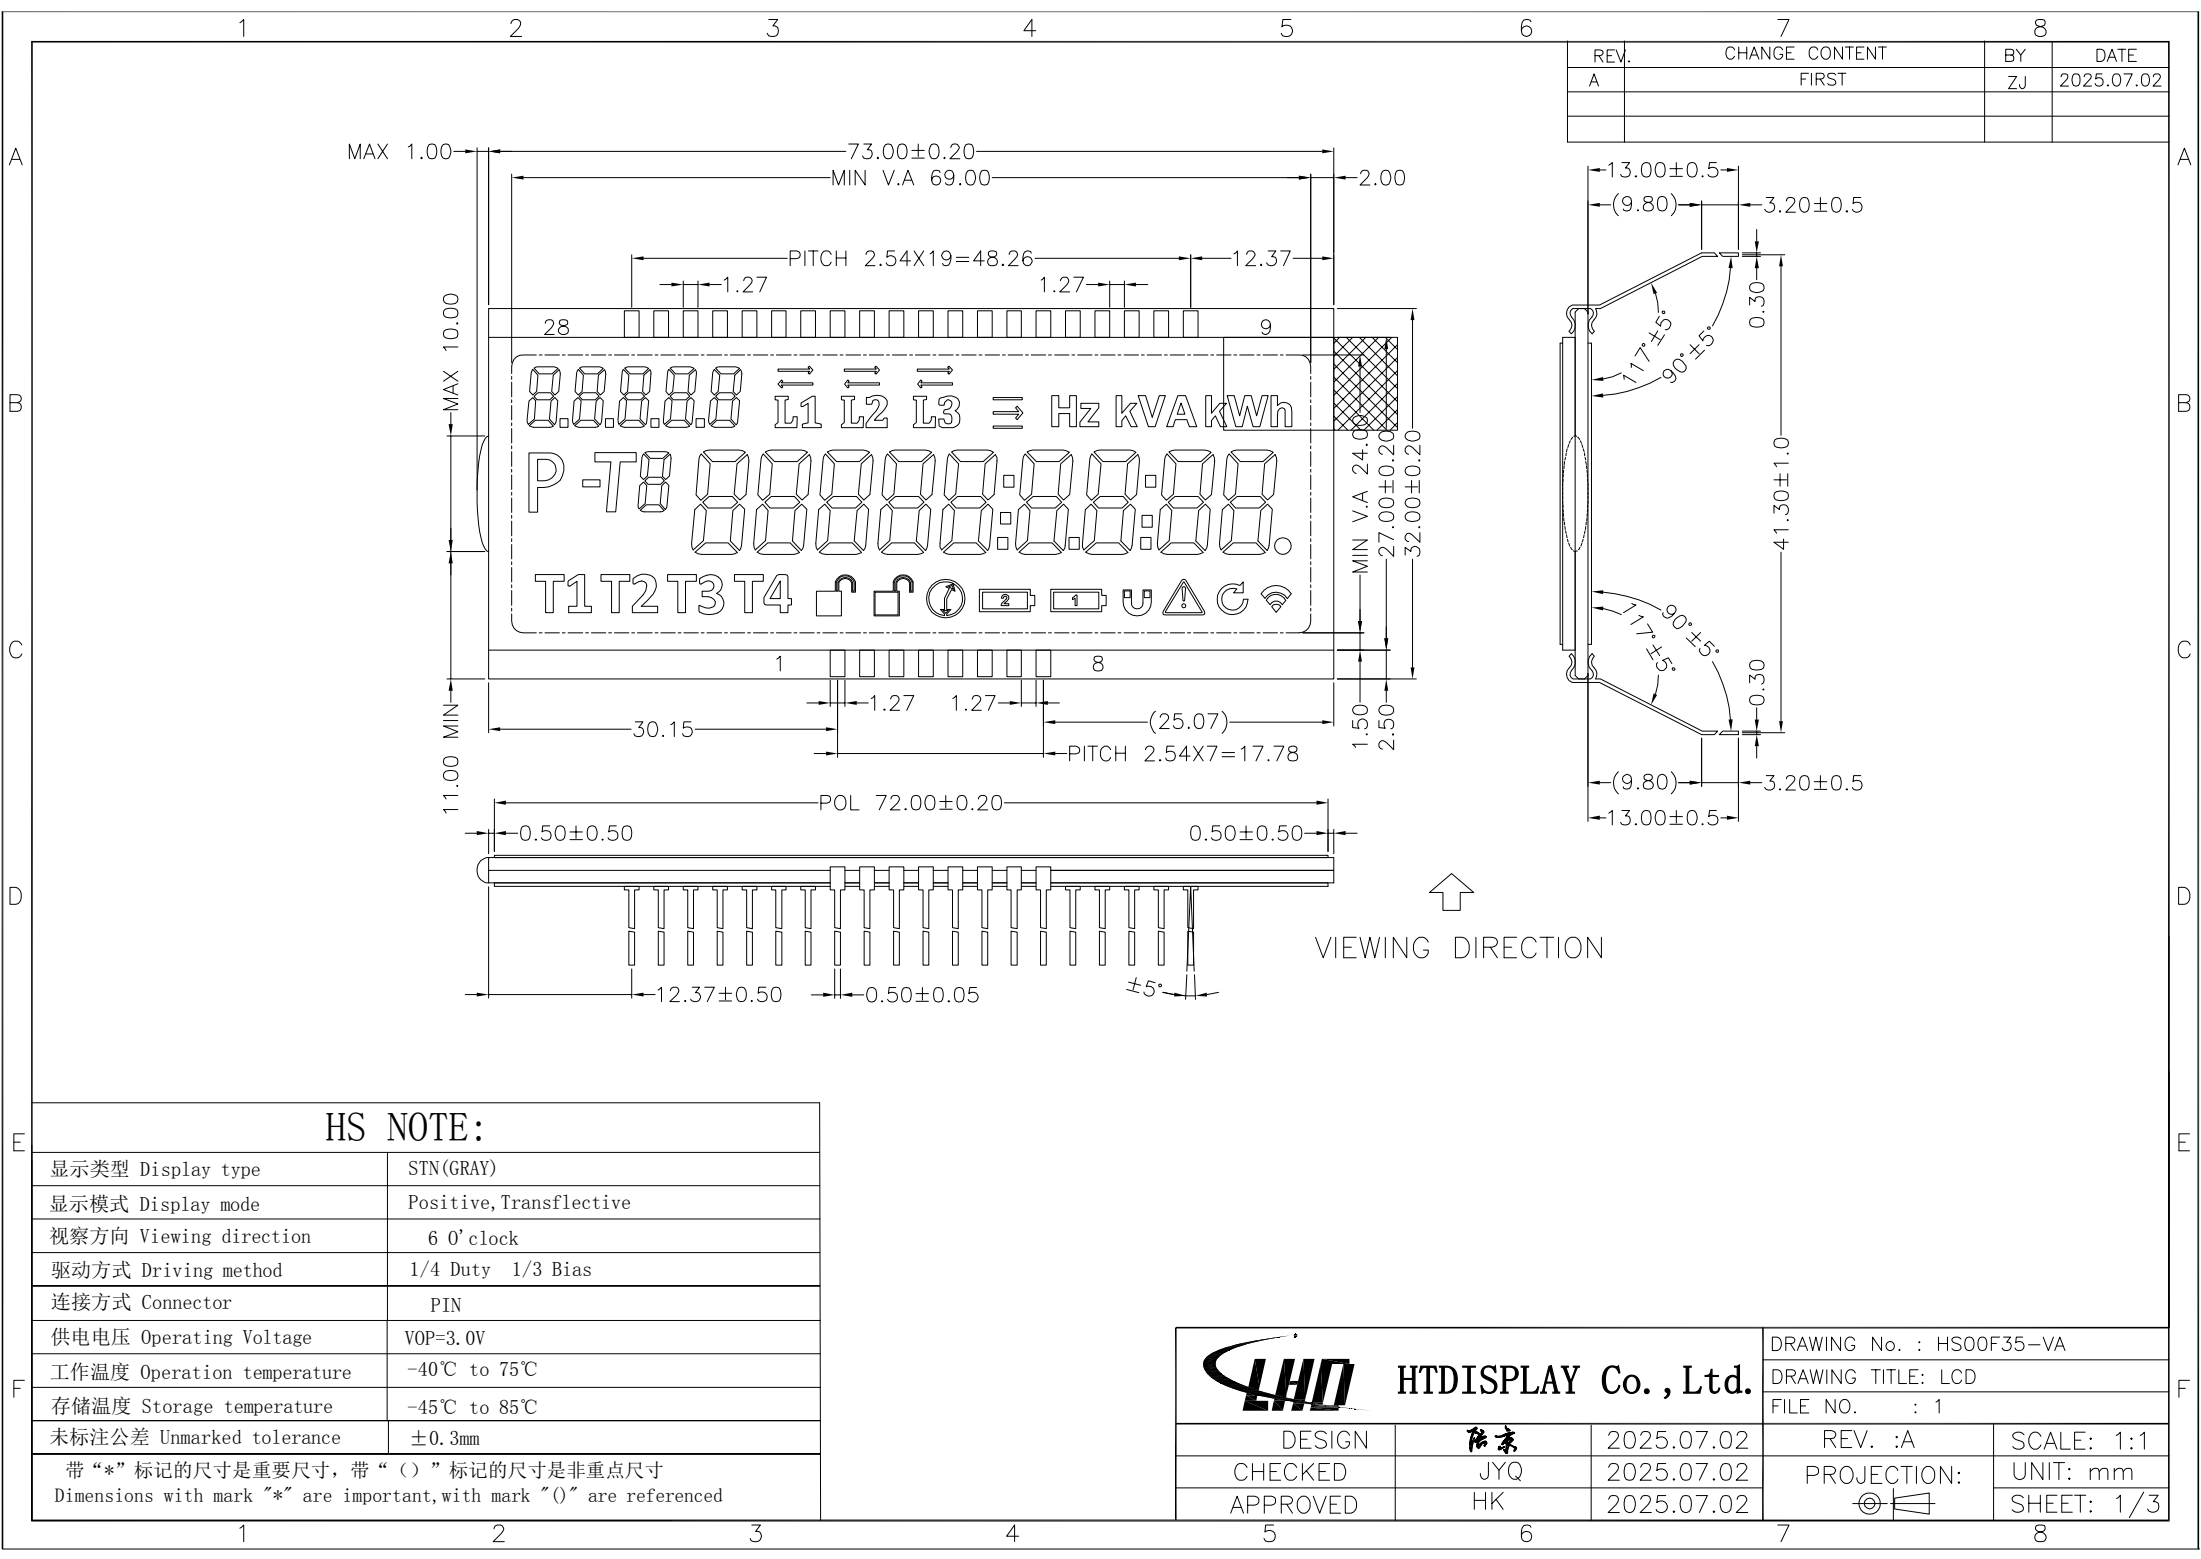


REV.	CHANGE CONTENT	BY	DATE
A	FIRST	ZJ	2025.07.02


HS NOTE:	
显示类型 Display type	STN (GRAY)
显示模式 Display mode	Positive, Transflective
视察方向 Viewing direction	6 O'clock
驱动方式 Driving method	1/4 Duty 1/3 Bias
连接方式 Connector	PIN
供电电压 Operating Voltage	VOP=3.0V
工作温度 Operation temperature	-40℃ to 75℃
存储温度 Storage temperature	-45℃ to 85℃
未标注公差 Unmarked tolerance	±0.3mm
带“*”标记的尺寸是重要尺寸,带“()”标记的尺寸是非重点尺寸 Dimensions with mark “*” are important,with mark “()” are referenced	

 HTDISPLAY Co., Ltd.			DRAWING No. : HS00F35-VA	
			DRAWING TITLE: LCD	
			FILE NO. : 1	
DESIGN	陈东	2025.07.02	REV. :A	SCALE: 1:1
CHECKED	JYQ	2025.07.02	PROJECTION:	UNIT: mm
APPROVED	HK	2025.07.02		SHEET: 1/3


PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
COM1	COM1								X5	L2	A1	14A	13A	12A	11A	10A		9A	8A	7A	6A	5A	4A	3A	2A	1A	15A	
COM2		COM2							X6	L3	A2	14B	13B	12B	11B	10B		9B	8B	7B	6B	5B	4B	3B	2B	1B	15B	K2
COM3			COM3						X7	L4	A3	14F	13F	12F	11F	10F		9F	8F	7F	6F	5F	4F	3F	2F	1F	15F	
COM4				COM4					X8	L5	A4	14G	13G	12G	11G	10G		9G	8G	7G	6G	5G	4G	3G	2G	1G	15G	
COM5					COM5				X9	L6	A5	14C	13C	12C	11C	10C	X1	9C	8C	7C	6C	5C	4C	3C	2C	1C	15C	
COM6						COM6			X10	L7	A6	14E	13E	12E	11E	10E	X2	9E	8E	7E	6E	5E	4E	3E	2E	1E	15E	K6
COM7							COM7		X11	L8	N5	14D	13D	12D	11D	10D	X3	9D	8D	7D	6D	5D	4D	3D	2D	1D	15D	K7
COM8								COM8	X12	L9	N6	P10	P9	P8	P7	P5	X4	P6					P4	P3	P2	P1		L1

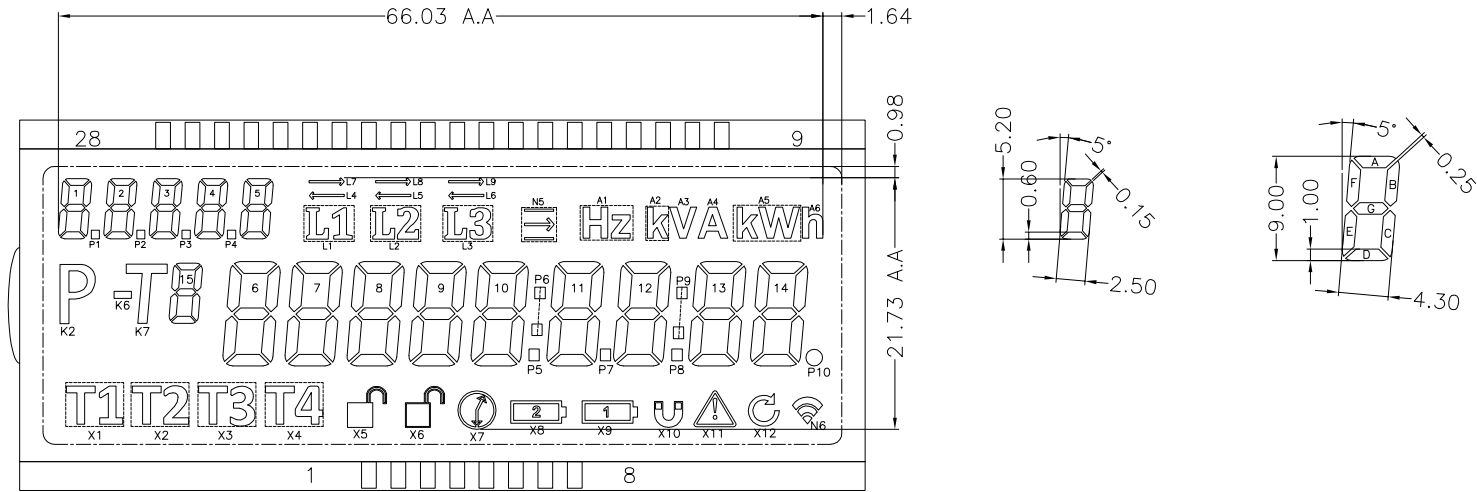

 HTDISPLAY Co., Ltd.			DRAWING No. : HS00F35-VA	
			DRAWING TITLE: LCD	
			FILE NO. : 1	
DESIGN	张东	2025.07.02	REV. :A	SCALE: 1:1
CHECKED	JYQ	2025.07.02	PROJECTION:	UNIT: mm
APPROVED	HK	2025.07.02		SHEET: 2/3

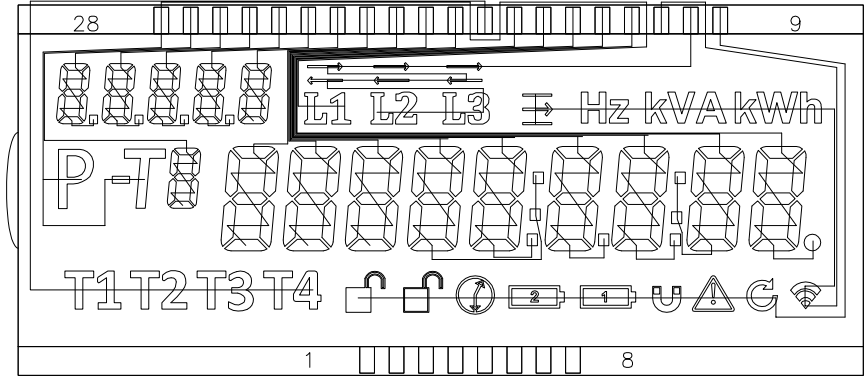

SEG

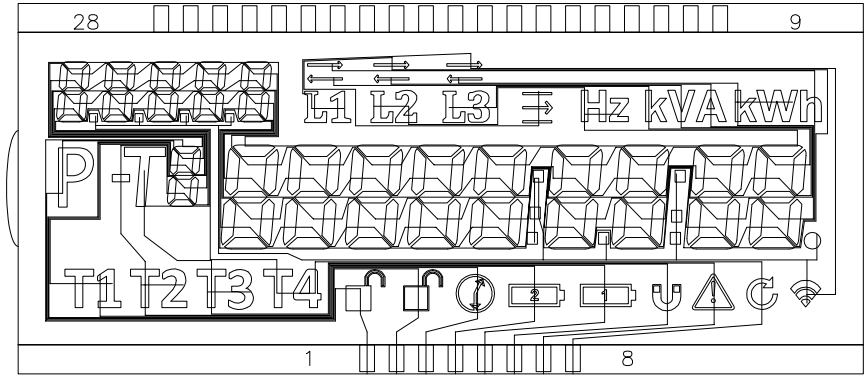

COM

 HTDISPLAY Co., Ltd.			DRAWING No. : HS00F35-VA	
			DRAWING TITLE: LCD	
			FILE NO. : 1	
DESIGN	张东	2025.07.02	REV. :A	SCALE: 1:1
CHECKED	JYQ	2025.07.02	PROJECTION:	UNIT: mm
APPROVED	HK	2025.07.02		SHEET: 3/3