




SSRNC

Features

- Small size
- Water proof
- Anti-vibration

Type

Solid state relay SSRNC

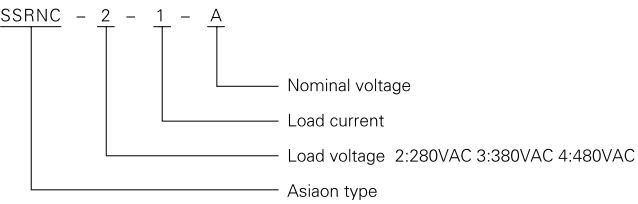

Specification

Outline dimension	57.5L × 44.8W × 31.5H
Load voltage	24V-280VAC/380VAC/480VAC
Load current	5-80A
Input voltage	A, B, C, D, E
Dielectric strength	2500VAC
Insulation resistance	≥50M
Step-down voltage	≤1.6V
Off leakage current	≤5mA
Operating time	≤10mS
Operating temperature	-30℃ ~ 70℃
Humidity	35% ~ 85%
Weight	400g

Input voltage

SSRX-A:	80-250VAC
SSRX-B:	3-32VDC
SSRX-C:	3-14VDC
SSRX-D:	8-32VDC
SSRX-E:	4-32VDC/AC

Outline dimension、Mounting holes (Bottom view)

