

DUCATI energia	CAPACITOR for POWER ELECTRONIC - GENERAL PURPOSE APPLICATIONS -	C = 150 μ F 250 Vac / 490 Vdc
S.p.A		Part. Number : 416.84.2350

CHARACTERISTICS

Rated Capacitance	150	μ F
Capacitance Tolerance	$\pm 5\%$	
Rated AC Voltage (Urms)	250	V
Rated DC Voltage (Un)	490	V
Maximum Current (Imax) @ θ_{MAX}	32	A
Self-inductance	< 160	nH
Series resistance (R _S)	< 8	m Ω
Typical tan d (10E-4)	4,5	(Measure @ 50Hz)
Thermal resistance natural cooling (R _{THN})	2,0	$^{\circ}$ C/W

Filler material	Polyurethane Resin
Dielectric	PPM Film
Over pressure safety device	
Aluminium case	
Weight	≤ 450 g

MAXIMUM RATINGS

Over voltage	1.1 Un	8hours/day
Non-recurrent surge voltage (Us)	950	V
Maximum peak current (I _{PK})	48	A
Max. Voltage raise of rise (dV/dt)	75	V/ μ s
Maximum surge current (Is)	2,4	kA

TEST DATA

DC Test voltage terminal to terminal	1,5xUn x 10s	Vdc
AC test voltage terminal to case	3kVx 10 s	Vac 50Hz

CLIMATIC CATEGORY

Min.operating temperature (θ_{MIN})	-25	$^{\circ}$ C
Max. operating temperature (θ_{MAX})	+70	$^{\circ}$ C
Storage temperature	-40 +85	$^{\circ}$ C
Altitude maximum	2000m	a.s.l.




Failure quota	300/10E9
Expected life (Ln)	100.000 h @ 250Vac / 50Hz

Humidity category	In accord. with DIN 40040	F
Insulating	In accord. with UL 810 / UL 840	
Vibration resistance	In accord. with EIA STAND. RS-186-7E	

STANDARDS

EN 61071-1/2
UL - CSA approval [File No. E192559]

Total elongation is about 25 mm after the overpressure disconnecter release.
Don't use rigid connections.

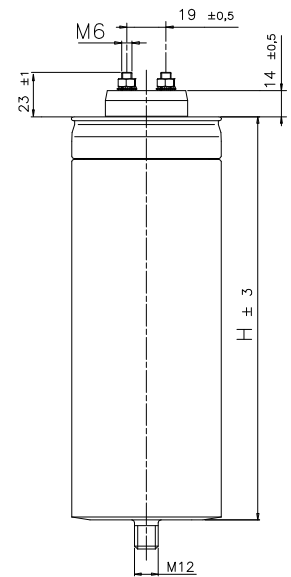

Ø [mm]	H [mm]
60 \pm 1	150 \pm 3

Maximum Fixing Torque for M6 terminals	3 [Nm]
Fixing Stud	M12

Release	Date	Description	Technician
-	03/07/07	First issue	A. G.